

"STEREO DISCAMP"

USER MANUAL

DNR



manufacturer of: recording - broadcast - p.a. - mixingdesks - signal processors

DISC-AMP manual

The D&R disc-amp is intended to be used with mangnetic dynamic cartridges giving signal levels of 2-5 mV.

The input impedance is 47kOhm with an input capacitance of 270 pf.

The inputs are on jack sockets as well as the outputs on the 9½" units while the 5HE units do have cinch inputs and jack socket outputs.

The output level can be adjusted to any level from infinity to +6dBu.

POWERING

The unit can be powered from 110v as well as 220 volt by setting the mains switch on the back of the unit. (on 9½" units only).

NOTE:

READ SAFETY INSTRUCTIONS VERY CAREFULLY ON THE BACK PAGE.



Conformity statement according to ISO/IEC Nr. 22 and EN 45014

Name Manufacturer
Addres manufacturer

D&R Electronica Weesp b.v.
Rijnkade 15B,
1382 GS Weesp,
The Netherlands

declares that this product

Name product
Modelnumber
Produktoptions

Disc-Amp
n.a.
All

passed the following product specifications:

Security **EN 60950: 1988 +A1, A2**

EMC: **CISPR-22: 1985 / EN 55022: 1988 class B (*)**
EN 50082-1: 1992
IEC 801-2:1991 / prEN 55024-2:1992 - 3kV CD, 8kV AD
IEC 801-3:1984 / prEN 55024-3:1991 - 3 V/m
IEC 801-4:1988 / prEN 55024-4:1992 - 0.5kV signalcables,
1 kV powercables.

Extra information:

The product passed the specifications of the following regulations;

Low voltage 73 / 23 / EEG
EMC-regulations 89 / 336 / EEG.

(*) The product is tested in a normal users environment.







DISC AMP

Service Manual

D&R Electronica BV
Rijnkade 15 B
1382 GS Weesp
The Netherlands
Tel: ++31-2940-18014
Fax: ++31-2940-16987

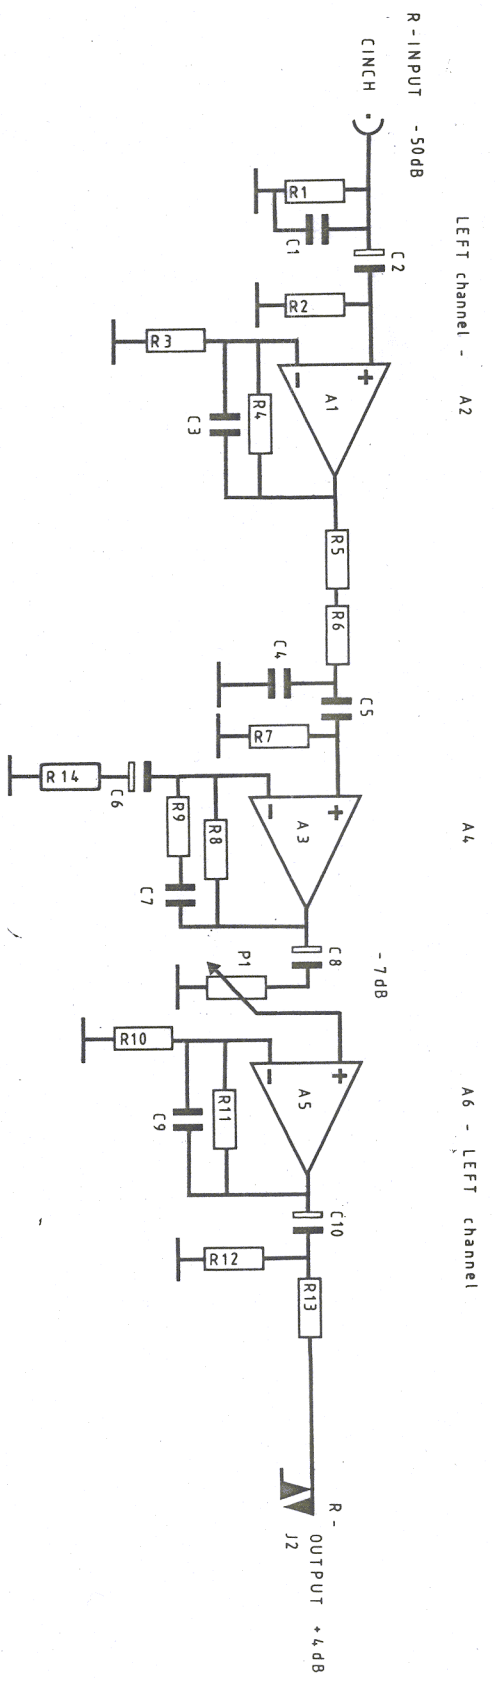



 RIJNKADE 15b

 1382 GS WEESP

 HOLLAND

 PHONE: 02940 18014

TITLE:		P.C.B. INDEX.		2,3	
DISC - AMP R channel		DRAWN :			
SHEET OF		DATE :			
© 1984		CHECKED:			

NOTES:	
0509	

