


How to connect a Mika microphone arm 'ON AIR'




Connect to the channel start for microphone dependent 'ON Air' Signaling

Connect to Mic-on for general Micon signaling

Set the GPO settings for correct operation

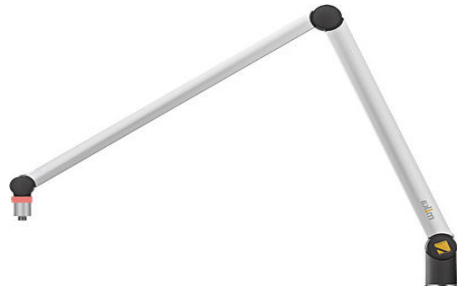

Power adapter +12V

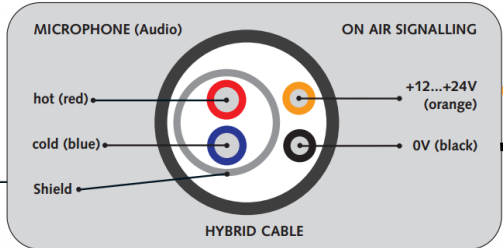

The balanced audio cable needs to go to the appropriate mic input

Connect to tip

Connect to ring

