

"DISCOM 5"

MANUAL

DNR

Geachte klant,

Wij danken u hartelijk voor uw keuze en het vertrouwen dat u in ons produkt stelt. U deed een goede keus, dit produkt is ontworpen door en voor professionele gebruikers. Er is gebruik gemaakt van onze enorme "know how" in mengtafel technieken en dit gekombineerd met hoogwaardige componenten geeft u de zekerheid van een lange gebruiksduur. Bovenstaande eigenschappen resulteren in een zeer betrouwbaar en bedrijfszeker eindprodukt. Uw discom 5 is een werkpaard onder de mixers.

Deze gebruiksaanwijzing helpt u in het optimaal benutten van alle mogelijkheden die deze mixer in zich heeft.

Mocht u nog vragen hebben dan kunt u zich te allen tijde tot onze dealers wenden en in uiterste nood tot ons

**D&R ELECTRONICA WEESP B.V.
Rijnkade 15B
1382 GS WEESP-HOLLAND
The Netherlands
Phone: 0294-418 014
Fax: 0294-416 987
Website: <http://www.d-r.nl>
E-mail: info@d-r.nl**

DE INGANGS MODUUL

De discom 5 is voorzien van 6 ruisarme "TRIPLE INPUT" ingangsmodule met de volgende mogelijkheden.

- * Twee lijningangen waarvan de "B" ingang geschikt is voor een optionele R.I.A.A. correctieversterker.
- * Een volledig gescheiden gebalanceerde microfooningang.
- * Een gain regeling.
- * Een driedelige toonregeling.
- * Een Cue toets voor voorafluistering in stereo.
- * Twee professionele 100mm faders en 4 professionele 60mm stereo faders.
- * Makkelijk vervangbare Crossfader tussen kanaal 3/4 en 5/6.

BEDIENINGS ELEMENTEN VAN DE INGANGSMODULES.

GAIN

Dit is het engelse woord voor versterking.

De "gain" past het inkomende ingangs signaal aan op het interne mixer signaal niveau.

Dit is nodig om een optimale signaal ruisverhouding te realiseren.

STEREO LINE.

Deze ingangskeuze schakelaar kiest tussen de stereo A of B ingangen achterop uw discom 5 mixer.


De B ingang kan voorzien worden van een R.I.A.A. correctievertsreker die nodig is voor weergave van platen. Bij het platen persen worden de lage tonen sterk verzwakt om meer muziek op de "zwarte schijf" te krijgen, tevens worden de hoge tonen extra versterkt.

De R.I.A.A. correctieversterker nu versterkt de lage tonen en verzwakt de hoge zodat de oorspronkelijke verhoudingen tussen hoge en lage tonen weer hersteld wordt met het voordeel van lagere ruis en de mogelijkheid om meer nummers op een plaat te zetten. (Dit ter verduidelijking van de functie van de R.I.A.A. versterker).

MIC INGANGSKEUZE SCHAKELAAR

Deze schakelaar kiest in ingedrukte toestand direkt de gebalanceerde XLR microfoon ingang.

De microfoon ingang is bestemd voor een laagohmige gebalanceerde dynamische microfoon

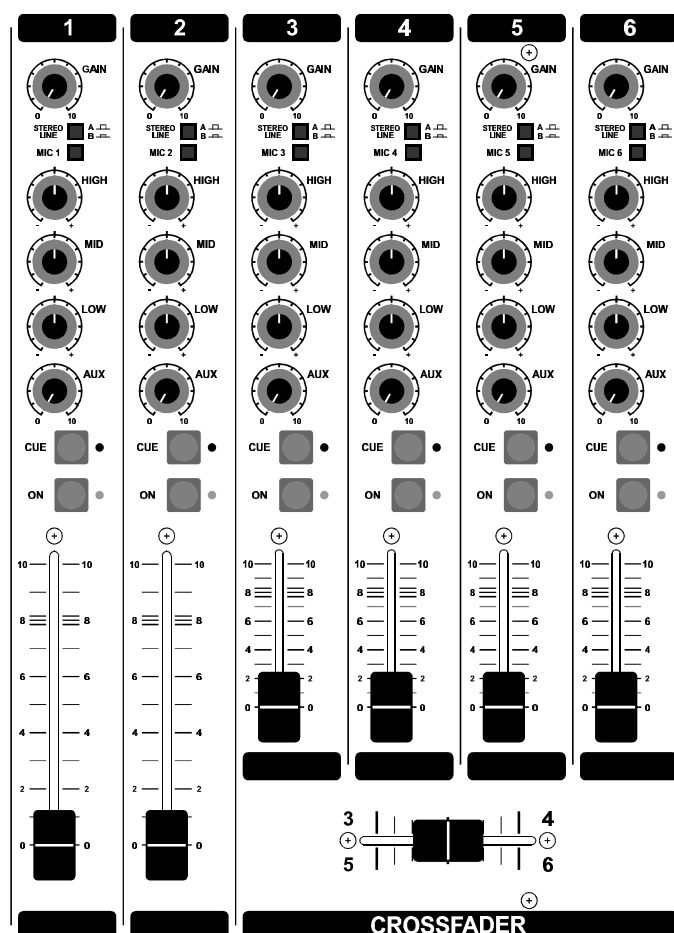

TOONREGELING

De ingangsmodule heeft een drievoudige toonregeling voor klankkleur correcties. De bas regeling heeft een speciale curve (een Bell curve) om te vermijden dat bij hoge volumes met veel bas informatie uw luidsprekers "opgeblazen" worden.

Door bij het extra versterken van de lage tonen de extreem lage frekwenties onder de 40Hz weer minder te laten versterken bereiken wij een goed vol laag zonder extra belasting van uw luidsprekers.

AUX SEND

De Aux send is een regelbare uitgang per kanaal die te vergelijken is met de functie van de fader. Deze Aux send stuurt eveneens een signaal of deel daarvan naar een aparte uitgang. Aux sends worden gebruikt voor het sturen van signalen naar effect apparatuur zoals galm of delay processors. De Aux is van fabriekswege uit zo ingesteld dat zijn signaal afgetakt wordt na de fader. Iedere faderbeweging zal ook invloed hebben op de hoeveelheid signaal dat op de Aux uitgang terecht komt. De Aux send kan ook "pre fader" (nu post fader) gezet worden door uw dealer. Indien de Aux send pre fader is dan is de Aux send optimaal te gebruiken voor monitor doeleinden.

CUE DRUKTOETS

De CUE druktoets geeft u de mogelijkheid om het microfoon of lijnsignaal vooraf in stereo te beluisteren alvorens het signaal in de mix te schuiven. Het gekozen signaal hoort u automatisch in de koptelefoon zodra de Cue toets geactiveerd is.

FADERS

Dan volgt als laatste op het kanaal front de kanaalfader (schuifpotentiometer). Deze schuifknop zorgt voor de uiteindelijke mixage van uw ingangssignalen. Kanaal 1 en 2 hebben 100mm faders en kanaal 3/4/5/6 hebben 51 mm faders om razendsnel mixen van twee of meer bronnen te realiseren. Deze laatste 4 kanalen zullen voornamelijk door CD spelers en cassette decks gestuurd worden en een snel in en uitfaden gaat veel eenvoudiger via korte faders dan via lange.

CROSSFADER

Onder de korte faders zit de crossfader. De crossfader biedt u de mogelijkheid om signalen tussen kanaal 3/4 en kanaal 5/6 soepel in elkaar over te laten vloeien zonder volume verschil te creëren door een speciale "cross" curve in de discom 5.


INGANGSCONNECTORS

Iedere ingang beschikt over drie gescheiden aansluitbare ingangen plus een start connector die later beschreven wordt.

Onder op het connector paneel zit een 3 polige XLR stekker, bestemd voor microfoons.

Een microfoon is een instrument dat acoustische signalen in elektrische signalen omzet zonder enige versterking (in de meeste gevallen).

Deze minuscuul kleine signalen moeten versterkt worden zonder storing en/of ruisbijdrage door het mengpaneel, hiervoor is de discom 5 uitstekend uitgerust.

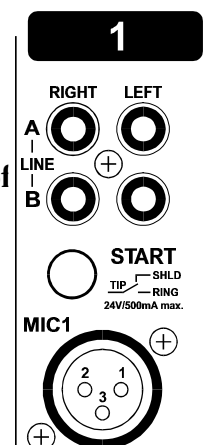

INGANGSCONNECTORS

In plaats van 1 gevoelige aansluiting aan de ingang heeft de discom 5 twee gevoelige aansluitingen per kanaal (gebalanceerd). Dit nu onderscheidt de discom 5 van de meeste andere discotheek mixers.

Het is mogelijk, en zelfs een professionele eis, de twee draden uit uw microfoon, welke binnen in de afscherming van de microfoonkabel zitten aan te sluiten op de gebalanceerde ingangen op de volgende wijze.

Een ader op punt 2 van de XLR connector (De grote ronde connector met drie bussen) en een ader op punt 3, punt 1 is de aarde welke aangesloten dient te worden op de mantel van de kabel die rondom de twee binnen aders ligt van uw microfoonkabel.

Wat heeft dit nu voor voordelen.

De op deze wijze aangesloten microfoonkabel is volkomen ongevoelig voor storingen van buiten af.

Indien u condensator microfoons heeft (op een ander principe ontworpen microfoons) dan is het mogelijk (zie options) om een phantom voedingsspanning van 15 volt te genereren op pin 2 en 3 van de XLR plug. *(Let op niet alle condensator microfoons hebben genoeg aan 15 volt om te werken).*

Indien er 48 volt nodig is raden wij u aan contact op te nemen met uw dealer of een externe phantom voeding uit onze signaal processor reeks aan te schaffen.

STEREO CINCH LIJN AANSLUITINGEN

De stereo lijningangen (Line staat op de achterzijde gedrukt) dienen als volgt aangesloten te worden.

De signaal draad dient op de pen van de cinch connectoren (ook wel tulp connector genoemd) aangesloten te worden.

U dient er tevens op te letten dat het signaal niveau zich bevindt tussen -20dB en +20dB om een volledige uitsturing van uw Discom 4 te waarborgen. Slechts dan ontstaat er een optimale signaal ruisverhouding.


STARTSWITCH

Deze connector is i.v.m. universaliteit van onze mengtafels niet aangesloten bij de discom 5. Er kan eventueel als optie een faderstart aangebracht worden in uw mengtafel waarbij de startconnector gebruikt wordt voor aansluiting.

SLUIT NOOIT 220 VOLT AAN OP DE START JACK

Sluit alleen laagspanning op de schakelkontakten aan met als maximum 24 volt bij 500 mA.

Neem hierover in twijfel gevallen contact op met uw dealer.

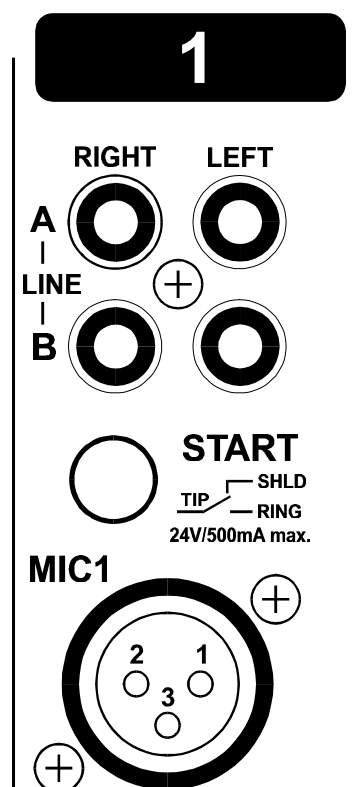

SPECIALE OPTIES IN UW discom 5 KANALEN.

Op de printplaat van uw discom 5 zijn verschillende jumpers (kleine overbruggingen) geplaatst om een aantal functies anders te laten verlopen dan de fabrieks instellingen op dit moment. Wij raden u aan dit door uw dealer uit te laten voeren indien u een van de hieronderstaande veranderingen wenst door te voeren.

Te beïnvloeden mogelijkheden zijn:

1. R.I.A.A. correctie versterker plaatsen op jumpers J12 en J13.
2. Laag af filter activeren op microfoon ingang via jumper J3.
3. 15 volt Phantome voeding activeren via jumper J15.
4. Aux send pre of post zetten via jumper J6 (fabrieks setting is post)
5. Start jack de-activeren door jumper J11 (1-2)
6. Monitor mute activeren door ON toets, jumper J11 (3-4) (voor radio doeleinden)

MASTER SECTIE

De discom 5 master sectie is het deel waar alle signalen uit de individuele kanalen zoals de links/rechts signalen, master Aux, en Cue uitgangen samen komen.

We zullen alle individuele functies, die voorzien zijn van heldere leds, per stuk bespreken.

LEDBAR METERS

De master heeft grote 21 segments ledbars (VU meters) die een duidelijke uitlezing geven van de uitgaande signalen. De aanspreektijd reactietijd (attack) is gelijk aan de teruglooptijd (release of decay), dit zijn internationaal vastgelegde normen voor VU meters, te weten 300mSec per 20dB signaal verloop. Deze aanwijzing hebben wij verkozen boven de peak aanwijzing die elke peak langer dan 1 mSec aangeeft.

Een peak aanwijzing is zeer geschikt voor digitale apparaten waarbij oversturing zeer onaangename bijgeluiden geeft. Een VU aanwijzing geeft een meer realistischer indruk van het geluidsniveau op een soortgelijke wijze als onze oren die ervaren. De ledbar is onderverdeeld in een aantal groene, gele en rode leds.


Het groene gedeelte is het "veilige" gedeelte, dit gedeelte moet zeker oplichten om een goede uitsturing van de electronica te waarborgen.

De gele leds geven het "werkgebied" van de audio aan, een regelmatig oplichten van de gele leds zorgt voor een goed signaal niveau.

De rode leds geven het begin aan van het gevaar gebied, een signaal mag af en toe het rood in gaan maar niet konstant, dit om vervorming te vermijden.

De uitgang van de mixer ligt 4 dB hoger dan het interne signaal niveau. Dit betekent dat de mixer uitgang +4dB signaal geeft (1.22 volt) indien de laatste groene led aangaat.

Dit niveau is ruim voldoende om elke versterker voluit te sturen.

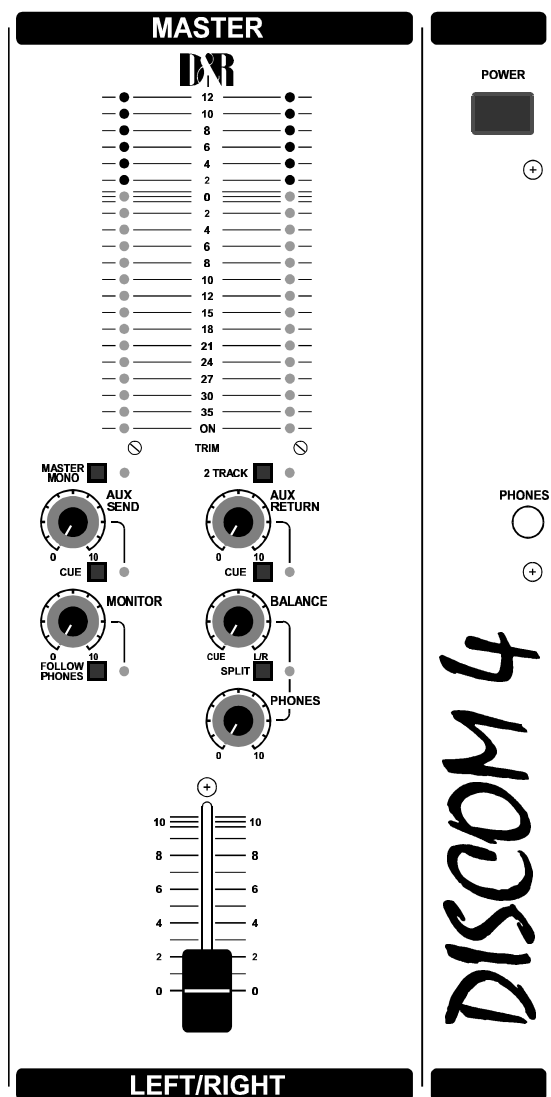

MASTER MONO TOETS

Deze toets maakt van het stereo signaal een mono signaal op beide hoofduitgangen. Deze toets is erg handig om een geluidsinstallatie goed in balans af te regelen, of bij het ontbreken van een van de stereo signalen toch de beide luidsprekerboxen of uitgangen voluit te sturen.

AUX SEND

De Aux send master regelt het totaal uitgaande signaal van alle individuele Aux sends in de ingangskanalen.

AUX CUE

De Aux Cue laat horen welke kanalen signaal naar de Aux master sturen. Het is wel nodig om de Aux master open te zetten (de Cue is hier post fader), dit is dus afwijkend van de kanalen. Maar om een juist inzicht te krijgen van het uitgaande signaal niveau op de ledbars, is het nodig dit zo te ontwerpen. U kunt nu dus met de master Aux regelaar het juiste niveau naar een aangesloten randapparaat sturen.

MONITOR

De monitor regelaar wordt gevoed uit de links/rechts master, voor de master stereo faders. Dit is dus een aparte stereo uitgang om nog een apparaat dan wel geluids systeem aan te sturen.

FOLLOW PHONES TOETS


Deze toets (met led) is eigenlijk een ingangskeuzeschakelaar voor de monitor uitgang. In plaats van de monitor te voeden met het links/rechts signaal is het ook mogelijk om de ingang van de monitor te voeden met het signaal dat in de koptelefoons terecht komt. Deze functie wordt vaak gebruikt door DJ's die zonder koptelefoon willen werken.

2 TRACK

Deze toets vervangt het inkomende master links/rechts signaal in de koptelefoon door een extern aangesloten stereo signaal via de 2 track ingang, gevoeligheid ligt op -10dBv (300mV). Let op!, het Cue systeem zal ook de 2 track inputs onderbereken indien het geactiveerd wordt.

AUX RETURN

Deze stereo ingang, (met eigen stereo cue af luistering) is bedoeld om galm apparatuur op aan te sluiten. Deze aux return staat rechtstreeks aangesloten op de centrale links/rechts mix versterkers. U kunt dus ook hierop een andere mixer aan sluiten zonder verlies van ingangskanalen.

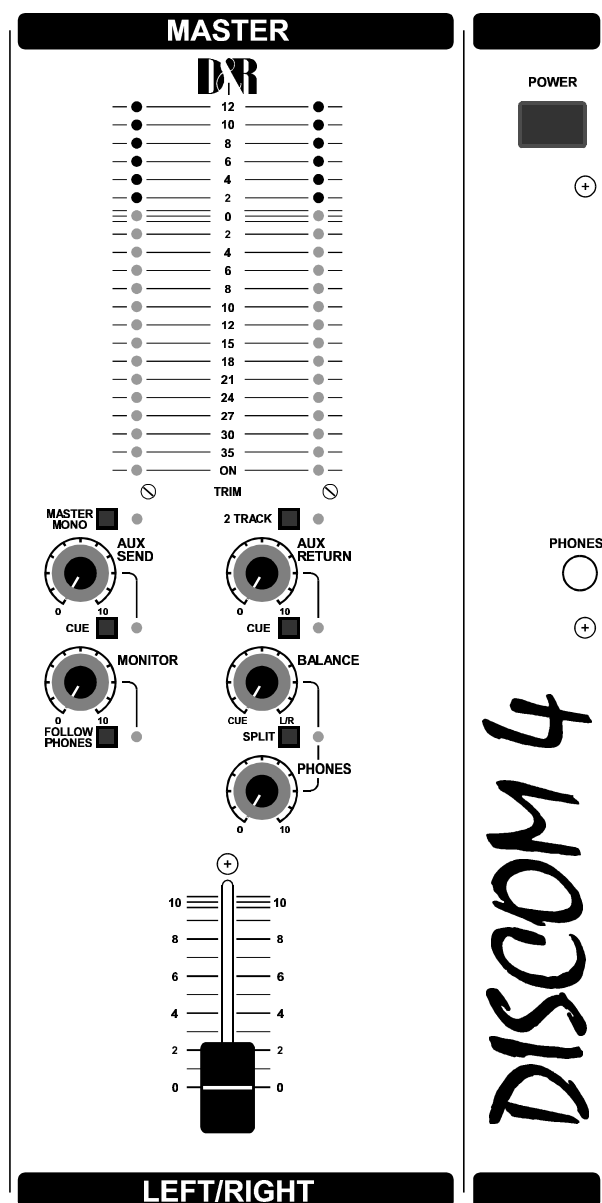

CUE AUX RETURN

Deze stereo Cue toets geeft de mogelijkheid vooraf te luisteren naar binnenkomende signalen via de stereo Aux return ingangen.

BALANCE

De balance regelaar heeft een wat uitgebreidere uitleg. Zoals op het front te zien is kunt u de balans regelen tussen de stereo Cue signalen en de master link/rechts uitgangssignalen in de koptelefoon uitgang.

Ook de split toets heeft hierop invloed, maar dat bespreken we later nog.

Zonder de split toets in te drukken is het nu mogelijk de balans te regelen tussen het Cue signaal en het uitgangssignaal.

Op deze wijze houdt u altijd controle over het uitgaande signaal indien een Cue toets geactiveerd is.

De balans tussen deze twee signalen kan naar smaak ingesteld worden.

SPLIT

Indien nu de SPLIT toets gedrukt wordt ontstaat de volgende af luister situatie.

In het linker oor hoort u nu het opgetelde Cue signaal in mono en in het rechter oor het opgetelde links/rechts signaal (pre fader).

De balance regelaar heeft nu geen invloed op deze verhouding.

PHONES

De phones uitgang (op het front) met volume regelaar heeft een automatische stereo ingangsschuifschakelaar die geactiveerd wordt door het CUE systeem van de discom 5.


Normalerweise hoort u op deze uitgang het stereo links rechts signaal, echter zodra er een Cue toets ergens in de mixer geactiveerd wordt, wordt het links/rechts signaal vervangen door dat specifiek geselecteerde Cue signaal.

Wij raden aan koptelefoons te gebruiken welke geen lagere impedantie hebben dan 400 Ohm.

Een 8 ohm koptelefoon zal bij het opdraaien van het volume snel vervorming gaan geven vanwege zijn zeer laagohmige belasting (dezelfde belasting als luidsprekers en de discom 5 is geen eindversterker). Hoewel dit alléén merkbaar is in de koptelefoonuitgang en niet op de master uitgangen, is het aan te raden deze situatie te vermijden.

MASTER FADER

De master fader van de discom 5 is een stereo 51mm fader die het totaal van het uitgangssignaal regelt.

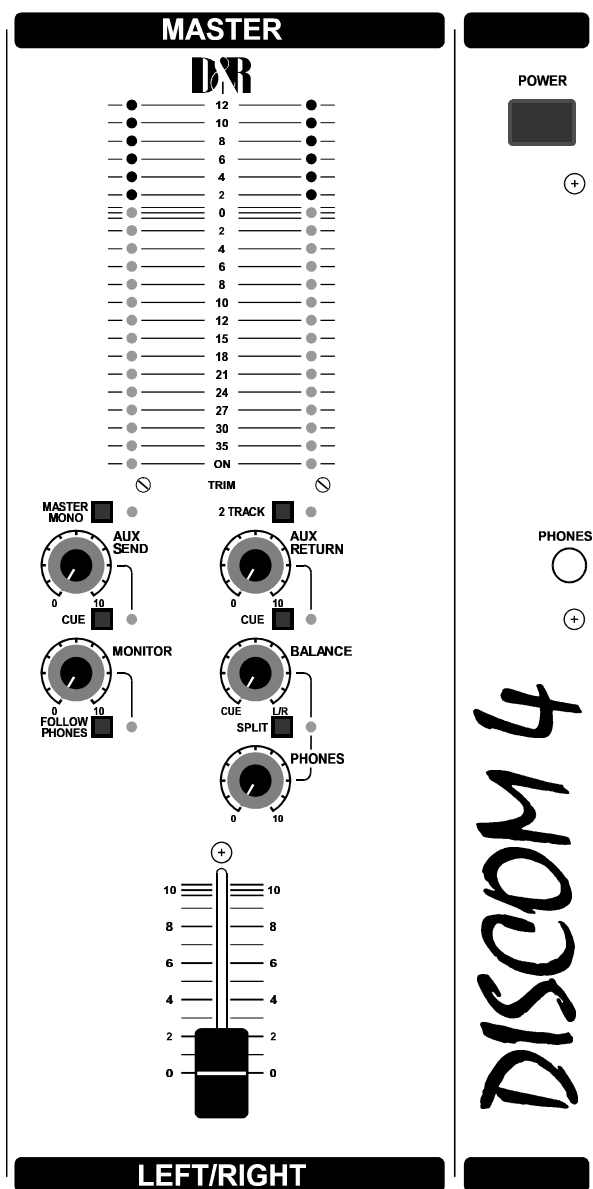


MASTER CONNECTORS

Het master achterpaneel bestaat uit 12 Cinch(tulp) connectors en 2 male XLR connectors waarop alle in en uitgaande signalen aangesloten worden. Verder vindt u hier de 220 volt netaansluiting met ingebouwde netzekering en een aarde aansluiting (ground).

TAPE OUTPUTS

Indien u van links naar rechts de connectors volgt komt u als eerste de Tape output connectors tegen. Zowel de linker als de rechter Tape uitgang is dubbel uitgevoerd voor het aansturen van meerdere opname decks.

Het uitgangsniveau is -10dBV (300 mV) en het signaal is onafhankelijk van de positie van de master fader.

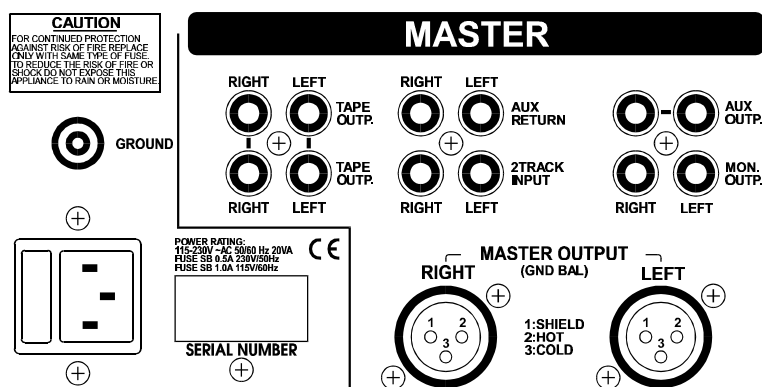

AUX RETURN

Rechts van de tape connectors ziet u de Aux return connectors. Dit zijn de ingangen die geregeld worden door de Aux return regelaar op de master sectie en die direct doorverbonden zijn naar de links/rechts som versterkers. Op deze ingangen kunnen effect apparaten zoals galm/reverbs aangesloten worden. Deze ingang is ook geschikt voor het aansluiten van apparatuur die geen toonregeling nodig heeft.

Het ingangsniveau moet minimaal -10dBv (300mV) zijn.

AUX OUTPUTS

De Aux output connectors zijn twee parallel geschakelde uitgangs connectors die het signaal doorgeven wat naar de Aux master gestuurd is. Het niveau is hier +4dBu (1.55 volt).

Deze uitgang is bedoeld voor het aansturen van galmapparatuur of monitor boxen.

Bij het gebruik van de Aux uitgang als monitor is het raadzaam om de Aux send per kanaal op pre fader te laten zetten door uw dealer.

2 TRACK INPUTS

Deze Cinch inputs zijn bestemd voor het laten weergeven van eventueel opgenomen signalen op uw tapedeck, DAT recorder, of anderszins. Het signaal komt direct in de koptelefoons indien de 2Track toets op het front geactiveerd is.

Het ingangs level dient minimaal -10dBV (300mV) te zijn.

MASTER OUTPUTS

De master outputs zijn uitgevoerd op male XLR stekers in een Ground compensated aansluitings configuratie. U kunt op deze uitgangen elke eindversterker aansluiten met gebalanceerde ingangen.

De Ground Compensated uitgangen zorgen voor een volledig gebruik van de voordelen van gebalanceerde in en uitgangen zoals optimale stoor onderdrukking voor brom instrooing van buitenaf. Het niveau is hier +4dBu (1.55volt)

GROUND CONNECTOR

Deze connector is bedoeld voor aarde aansluiting van draaitafels en/of als centraal aardpunt in een complexe installatie.

NET ENTREE MET ZEKERING

De net entree is uitgevoerd als eurosteker met ingebouwde zekering.

De discom 5 is geschikt voor spanningen tussen 210 volt en 230 volt (de netspanning waar we langzaam naar toegaan in dit land). De ingebouwde zekering is 1 Ampere traag.

Vervang nooit deze zekering door een hogere waarde, het kan bij interne sluiting brand veroorzaken.

IN GEBRUIK STELLING

- Sluit een eindtrap/recorder/zender aan op een van de left/right MAIN XLR outputs.
- Sluit een hoog ohmige koptelefoon aan op de "phones" jack op het front.
- Verbind uw microfoon als omschreven met de discom 5.
- Zo ook de draaitafels, alsmede deapedecks en jingle machine.

***Nu uw hele installatie staat aangesloten, volg de onderstaande inregelprocedure*,**

- Zet de PHONES volume regelaar op ongeveer "12 uur".
- Zet alle gainknoppen en master volume regelingen linksom.
- Zet alle toonregelingen op "12 uur".
- Zet alle faders naar beneden.
- Zet alle druktoetsen zo dat ze korresponderen met de aangesloten bronnen.
- Voor microfoons alleen de rode mic toets omlaag.
- Voor cassette decks op ingang A alle toetsen omhoog.
- Voor draaitafels de STEREO LINE toets ingedrukt (er dient dan wel een R.I.A.A. correctie versterker op de print gemonteerd te zijn)
- Sluit een netsnoer aan op de mixer.
- Schakel de voeding in via de netschakelaar waarna de onderste leds van de ledbar oplichten.

INREGELING INGANGSMODULE

Druk de CUE toets van het kanaal dat u wilt gebruiken.

Draai nu de "GAIN" knop langzaam naar rechts, totdat u het ingangs signaal hoort en op de ledbar ziet.

U kunt bij voldoende uitsturing op de ledbar (signaal komt af en toe in het gele gedeelte) het PHONES volume aanpassen aan wat u zelf aangenaam vindt.

Het nu gehoorde signaal moet regelmatig door de "0" dB led heen bewegen bij aanwezig ingangssignaal. De ledbar reageert op het gemiddelde niveau (VU aanwijzing) en is zo afgeregeld dat een uitgangs niveau van +4 dBu (1.22 volt) een uitlezing geeft van 0 dB op de Led bar.

U kunt door verdraaiing van de toonregelingen een aangenamer klankkleur realiseren.

Kontroleer na de toonregel-instellingen nogmaals het niveau via de ledbar.

Schakel nu de CUE toets uit.

Druk nu de ON toets in waardoor u het signaal doorverbindt met de fader.

Schuif nu de fader omhoog naar de "8" positie (het gebied met meerdere lijnen) en schuif langzaam de master volume fader omhoog totdat de ledbars wederom regelmatig door de "0" tot maximaal +8 dB positie heen oplichten.

Verdere volume instellingen moet u realiseren op de eindversterkers/tapedecks.

INREGELING INGANGSMODULE

Een goede gewoonte is om bij volledig opgeschoven master faders een goede uitsturing te realiseren op de ledbars en vervolgens uw eindverkers zo in te regelen dat zij het gewenste volume geven wat nodig is voor de job.

De andere inputs worden op een identieke wijze ingeregeld via de CUE toets en de gainregeling.

Zaken om op te letten.

Zorg ervoor dat de discom 5 niet opgesteld wordt in de buurt van zware transformatoren zoals aanwezig in eindversterkers. Dit kan brom veroorzaken door instrooing, ondanks de plaatstalen kast en het dikke front.

In geval van vragen leest u de gebruiksaanwijzing nogmaals door en tracht bij storingen door logisch nadenken te lokaliseren waar de storing zich bevindt alvorens ongerust uw dealer op te bellen.

INBOUW INSTRUCTIES VOOR R.I.A.A. CORRECTIE PRINT.

De discom 5 heeft de mogelijkheid om elk kanaal geschikt te maken voor pick-up elementen welke een speciale correctie curve nodig hebben.

De stereo R.I.A.A. correctieversterker die op uw verzoek hierbij geleverd wordt kan eenvoudig door uzelf worden ingebouwd in het door u gekozen kanaal.

Zorg allereerst dat de netstekker uit het stopkontakt verwijderd is!

Verwijder met een kruiskop schroevendraaier de drie boutjes aan de voorzijde in het front van het mengpaneel.

Leg vervolgens het mengpaneel op zijn kop op een zachte ondergrond (zodat de knoppen niet beschadigen).

Verwijder nu de drie boutjes aan de onderkant van uw mengpaneel en de twee boutjes aan de zijkant van de kast. U kunt nu de omkasting van de mixer verwijderen door deze naar voren weg te trekken.

U ziet nu de zes kanaal printen met op iedere print direkt achter de ingangs jacks twee stekkertjes 45 mm van elkaar geplaatst in het RIAA optievlak, waarvan een (J12) voorzien is van twee jumpers, dit zijn kleine kortsluit brugjes.

Verwijder de twee kortsluitbrugjes en plaats het R.I.A.A. printje met de komponenten naar de print toe gericht op de twee stekkertjes op dat kanaal waar u de korrektie versterker wenst.

Er is maar een juiste manier mogelijk om dit te doen.

Let op dat alle vier de pennen in de busjes vallen en druk de print zover mogelijk naar beneden.

Dit is alles wat er nodig is om de discom 5 geschikt te maken voor pick-ups.

Zet vervolgens de bodem weer vast in omgekeerde volgorde van het uiteennemen.

Wij wensen u veel plezier met uw nieuwe aanwinst.

D&R service department

Hieronder volgt nog een opsomming van belangrijkste technische gegevens.

MIC input	XLR aansluiting symmetrisch ingangsimpedantie 2 kOhm. pin 2-in faze. pin 3-uit faze. pin 1 -aarde. gevoeligheid - 60 dBu.
LIJN A/B input	Cinch (tulp) connectors voor links en rechts. Gevoeligheid -20 dBu tot +20dBu.
Disc inputs (Line B)	(Alleen met optionele R.I.A.A. correctie versterker). 47 kOhm 0,5 mV tot 10 mV.
START remote (optional)	Stereo jack waarbij tussen aarde (echter vrij van de audio aarde) en ring geschakeld wordt. LET OP!!! Niet geschikt voor 220 volt!
MASTER OUTPUT	XLR male aansluiting voor links en rechts. pin 2-in faze. pin 3-uit faze. pin 1 -aarde. uitgangsniveau +4 dBu (1.55volt)/100 Ohm .
TAPE	Cinch aansluiting voor links en rechts. -10dBv (300mv) uitgang / 1kOhm. Afscherming-aarde.
AUX RETURN	Cinch aansluiting voor links en rechts. -10dBv (300mv) ingang / 10kOhm. Afscherming-aarde.
2-TRACK INPUT	Cinch aansluiting voor links en rechts. -10dBv (300mv) ingang / 100kOhm. Afscherming-aarde.
AUX OUTPUTS	Cinch aansluiting, (parallel geschakeld) +4dBu (1.22 volt) 100 Ohm. Afscherming-aarde.
MONITOR OUTPUT	Cinch aansluiting voor links en rechts. +4dBu (1.22 volt) 100 Ohm. Afscherming-aarde.
PHONES	Stereo en alleen geschikt voor koptelefoons van 400 ohm en hoger.

TECHNISCHE SPECIFICATIES

INPUTS	Mic input balanced 2 kOhm. Mic noise -122dBr (A-weighted). Gevoeligheid: -70dB min, 0dB maximum. Line inputs: unbalanced, 10kOhm, Cinch gain range 40dB. Phono inputs: unbalanced, 47kOhm, 1-10 mv. 2 Track return: -10dBv at 10kOhm. Aux return: -10dBv at 10kOhm.
OUTPUTS	Left/Right/Monitor/Aux: +4dBu (1.55volt) at 47 Ohm. Tape output: -10dBv at 1kOhm. Headphone: 400-600 Ohm, 500mw.
EQUALIZER	High: +/- 12 dB at 12kHz shelving curve. Mid: +/- 12 dB at 1 kHz bell curve. Low: +/- 12 dB at 60 Hz bell curve.
OVERALL	Frequency response 10-60.000 Hz (+/- 0.5dB). Distortion: <0.009% max at 1 kHz. Dimensions: 483x356x95 mm (8HE). Weight: 9 kg.

**Wij wensen u een zeer langdurig en creatief gebruik van dit produkt van
D&R Electronica Weesp b.v.**

Rijnkade 15B

1382 GS WEESP

The Netherlands

Phone: 0294-418 014

Fax: 0294-416 987

Website: <http://www.d-r.nl>

DECLARATION OF CONFORMITY

Manufacturers Name: D&R Electronica Weesp b.v.

Manufacturers Address: Rijnkade 15B,
1382 GS Weesp,
The Netherlands

declares that the product

DISCOM 5 series

conforms to the following product specifications:

EMC:	NEN-EN 55103-1	1995
	NEN-EN 55103-2	1995
	NEN-EN 55013-1	1994

Supplementary Information:

The products herewith complies with the requirements of the EMC Directive 89/336/EEC (1989) as amended by the CE Marking Directive 93/68/EEC (1993).

**D&R Electronica Weesp b.v.
Rijnkade 15 B
1382 GS WEESP
The Netherlands
President of Engineering**

.

PRODUCT SAFETY

This product is manufactured with the highest standards and is double checked in our quality control department for reliability in the "HIGH VOLTAGE" section.

CAUTION

Never remove any panels, or open this equipment. No user servicable parts inside.

Equipment power supply must be grounded at all times.

Only use this product as described, in user manual or brochure.

Do not operate this equipment in high humidity or expose it to water or other liquids.

Check the AC power supply cable to assure secure contact.

Have your equipment checked yearly by a qualified dealer service center.

Hazardous electrical shock can be avoided by carefully following the above rules.

EXTRA CAUTION FOR LIVE SOUND

Ground all equipment using the ground pin in the AC power supply cable.

Never remove this pin. Ground loops should be eliminated only by use of isolation transformers for all inputs and outputs. Replace any blown fuse with the same type and rating only after equipment has been disconnected from AC power.

If problem persists, return equipment to qualified service technician

PLEASE READ THE FOLLOWING INFORMATION

Especially in sound equipment on stage the following information is essential to know.

An electrical shock is caused by voltage and current, actually it is the current that causes the shock.

In practise the higher the voltage the higher the current will be and the higher the shock.

But there is another thing to consider and it is resistance.

When the resistance in Ohms is high between two poles, the current will be low and vica versa.

All three of these; voltage, current. and resistance are important in determining the effect of an electrical shock.

However, the severity of a shock primarily determined by the amount of current flowing through a person.

A person can feel a shock because the muscles in a body respond to electrical current and because the heart is a muscle it can affect, when the current is high enough.

Current can also be fatal when it causes the chest muscles to contract and stop breathing. At what potential is current dangereous.

Well the first feeling of current is a tingle at 0.001 Amp of current.

The current between 0.1 Amp and 0.2 Amp is fatal.

Imagine that your home fuses of 20 Amp can handle 200 times more current than is necessary to kill. How does resistance affect the shock a person feels.

A typical resistance between one hand to the other in "dry" condition could well over 100,000 Ohm.

If you are playing on stage your body is perspiring extensively and your body resistance is lowered by more than 50%. This is a situation in which current can easily flow.

Current will flow when there is a difference in ground potential between equipment on stage and in the P.A. system. Please do check if there is any potential between the housing of the mikes and the guitarsynth amps, which will be linked by your body on stage. Imagine, a guitar in your hand and your lips close to the mike! A ground potential difference of above 10 volts is not unusual, in improperly wired buildings it can possibly be as high as 240 volts.

Although removing the ground wire sometimes cures a system hum, it will create a very hazardous situation for the performing musician.

Always earth all your equipment by the grounding pin in your mains plug.

Hum loops should be only cured by proper wiring and isolation input/output transformers.

Replace fuses always with the same type and rating after the equipment has been turned off and unplugged.

If the fuse blows again you have an equipment failure, do not use it again and return it to your dealer for repair.

And last but not least be carefull not to touch a person being shocked as you, yourself could also be shocked.

Once removed from the shock, have someone send for medical help immediately

Always keep the above mentioned information in mind when using electrically powered equipment.

ENGLISH TRANSLATION OF *discom 5* MANUAL

We like to thank you for purchasing our new *discom 5* mixer and are certain that it will give you years of reliable joy while mixing with this D&R product.

The *discom 5* is equipped with 6 low-noise mic balanced input modules. with the following features

- * Two line inputs with optional R.I.A.A. pluggable pre-amp
- * A professional low noise balanced mic pre-amp
- * A gain control
- * A three band equalizer
- * A stereo CUE switch for pre fade listening
- * Two 100 mm professional faders and four 51mm professional faders.
- * Crossfader between channel 3/4 and 5/6

INPUT MODULES

Every module has three selectable inputs. There is a microphone input on XLR, and two stereo line inputs on cinch connectors and a Start connector.

The mic input is a professional balanced input circuit, this means that you now have a studio-class microphone-channel at your disposal.

A microphone is an instrument that turns acoustical signals in electrical ones, without any amplification (in most cases).


These very small signals have to be amplified without any noise and interference from the mixing table. The *Discom 5* is equipped for this purpose. Instead of one sensitive connection at the input channel, the *discom 5* has 2 connections per channel (balanced). This is a major difference between the *Discom 5* and other disco mixers.

It is now possible to connect the 2 wires in your microphone cable to the balanced input as follows:

- One wire to pin 2 of the XLR connector.
- The other wire to pin 3 of the XLR connector.
- The shielding on the remaining pin 1 of the connector.

What are the advantages of this system ?

A microphone cable connected in this way is completely insensitive for outside interference.

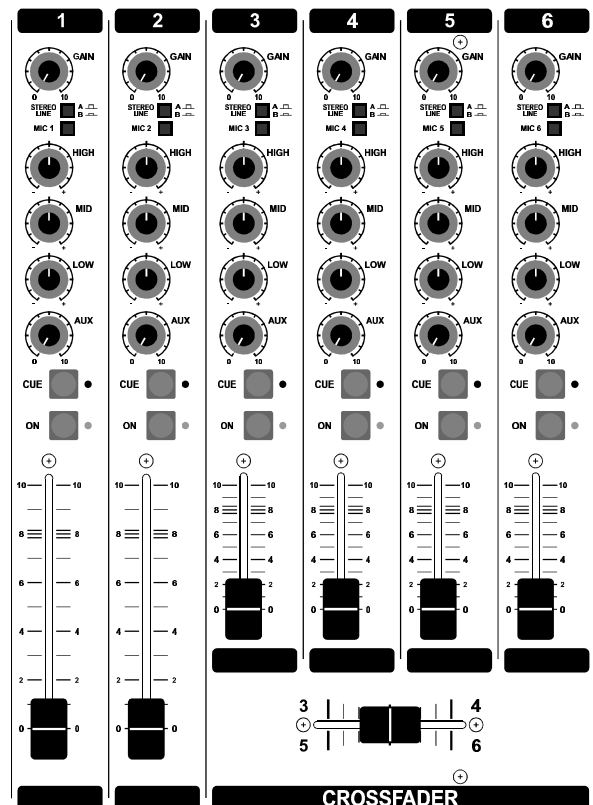

STEREO LINE

The stereo line inputs need to be connected as follows.

The left cinch connector is the left input and the right Cinch connector is the right input.

The shield needs to be connected to the ground.

The START switch has two active connections to be wired. The tip and ring are shorted when the ON switch or optional faderswitch is activated.

The controls of the input modules have the following functions.

GAIN

With the gain, the source level is adjusted to the internal mixer level.

The module has a three band equalizer to control the high and low frequencies individually in bad acoustic environments.

Below the equalizer you will find the stereo CUE switch (Pre Fader Listening), this switch gives you the possibility to check the signal before you mix it with your other signals .

The ON switch is used to start turntables and cassette decks as well as jingle machines.

Last control is the 100mm channel fader, this is the actual control to mix the signals.

Channel 3 to 4 have short travel faders to be able to do fast mixing.

CROSSFADER

Below the short travel faders you can find the crossfader enabling you to cross signals between channels 3/4 and 5/6 without any level changes.

This is due to a special curve

INPUT CONNECTORS

On the back of your Discom 5 you find six connectors, one has already been discussed, that was the balanced or symmetrical microphone input, the other two are the stereo line inputs.


On line B you can buy an optional available R.I.A.A. correction amp to be able to mix turn tables. The level can be set by the gain control to match with every available cartridge.

There is a stereo "CUE " switch on the front to cue the incoming signal.

START CONNECTOR

The start connector is not connected in the Discom 5 for reasons of production. For your information, we also use the backpanel for Clubmate mixers which do have an ON switch.

Also the older model Discom 4 had an ON switch, but customer feedback told us that DJ's were not very pleased with the ON switch. It has the danger of suddenly muting the sound when hitting this switch instead of the CUE switch.

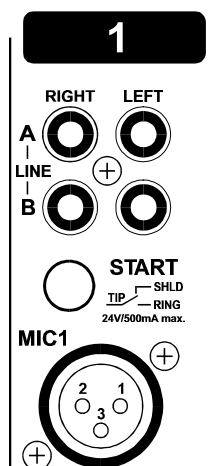

****NEVER CONNECT MAINS TO THIS REMOTE-JACK****

Connections on the START connector can only be made with a maximum of 24 Volts by 500 mA. Please contact your dealer in case of doubt.

SPECIAL AVAILABLE OPTIONS IN YOUR DISCOM 5 MIXER

On the input PCB of your Discom 5 are several jumpers that can be changed to enable different configurations of the channel settings.

We advice you to have this done by your local dealer if the need arises.

The following jumper settings can be selected:

1. R.I.A.A. correction amp on Jumper J 12 and J 13.
2. Low cut filter on Mic input only through Jumper J 3.
3. 15 volt phantome power via Jumper J 15.
4. Aux send pre or post selectable via Jumper J6 (post is default).
5. Start jack de-activating by Jumper J 11 (1-2).
6. Monitor Muting active by On switch via Jumper J 11 (3-4) (for broadcast).

THE MASTER SECTION

The Discom 5 master section houses all the controls for the summing amps and master inputs such as Aux return, 2-Track return, and master outputs. All individual functions we shall describe here.

LEDBAR METERS

The master section has two large 21 segment meters (VU meters) reading all in and outgoing signals. The attack and release timeconstants are conform international standards, being 300mSec for attack and decay.

The green area in the ledbar is the safe area, and the yellow area the range that normally would be on when properly aligned.

The output of your discom 5 is +4dBu (1.22v) when the last green led is on.

MASTER MONO SWITCH

This switch turns the stereo signal into mono for both main outputs. It is a convenient way of balancing the left right signal before going to stereo. Also when one side of the stereo signal is missing the mono switch is very helpful.

AUX SEND

The Aux send master controls the sum of all the individual Aux send signal coming from the input channels.

AUX CUE

The Aux cue redirects the master output signal and ledbar indication to the Aux output that gives you the total outgoing signal of the Aux master. It is necessary to turn the master control up to have an outgoing signal.

MONITOR

The monitor control is fed by the master outputs pre master fader. It is an extra stereo output for another sound system or recording device.


FOLLOW PHONES

This switch actually is an input selector for the monitor output. Instead of listening to the main outputs, it is also possible to listen to the phones output. This feature is often used by DJ's that do not want to use headphones.

2-TRACK

This switch replaces the incoming left/right signal or Cue signal by an externally connected source on the 2 track input connectors. Its sensitivity is -10dBv (300mV).

Note: The Cue system will interrupt the 2 track when activated.

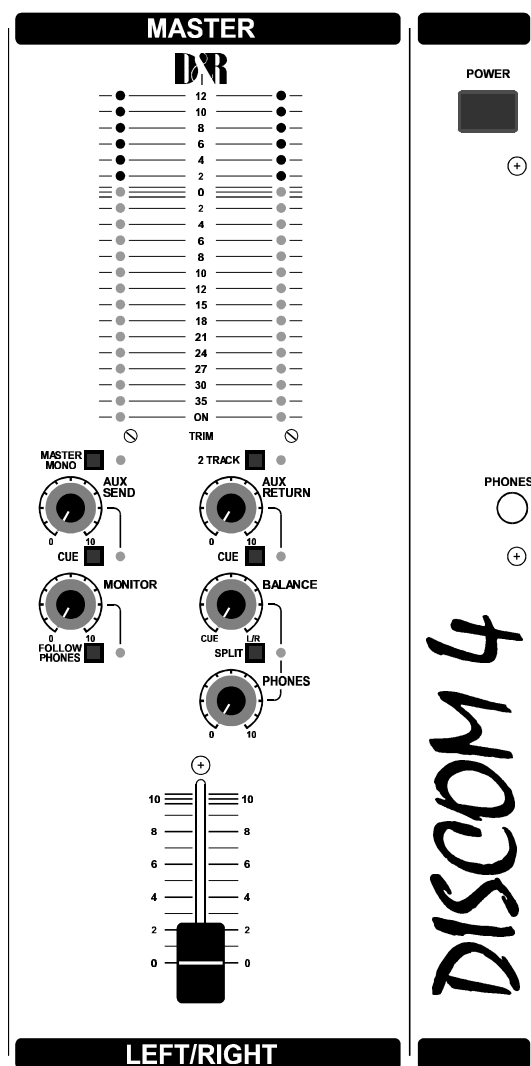

AUX RETURN

This stereo input is intended to be used for returning reverbs. This input is directly connected to the stereo main mix buss and can be used to connect other mixers without losing valuable input channels.

CUE AUX RETURN

This switch enables you to stereo pre listen to an incoming Aux return signal.

BALANCE

The balance knob controls the balance between the main stereo output and the stereo Cue signal when selected.

Note: The split switch de-activates the balance control.

With the balance control anywhere between Cue and L/R you always have control over the main output signal even when a Cue switch is activated.

SPLIT

When the split function is activated the following listening situation is created.

The left side of the phones output gives the summed Cue signal and the right output gives the summed left/right signal (pre fader).

The balance control has no influence on this configuration anymore.

PHONES

The phones output (located on the frontpanel) has an automatic input selector.

Normally the left/right output is heard until a Cue switch is activated anywhere in the console that immediately takes over the left/right signal. The ledbar switches accordingly with this action. We advice you to use headphones with an input impedance not lower than 400 Ohm to avoid distortion. An 8 Ohm headphone will produce lots of distortion when cranking up the level due to its low impedance load. It is a load equivalent to the load that loudspeakers normally present to power amps and as you know the discom 5 is no power-amp, sorry.

MASTER FADER

The Discom 5 master faders are 60mm models controlling both left and right signals.

MASTER CONNECTORS


The master connector panel houses 12 Cinch connectors and 2 male XLR connectors where all interfacing takes place.

Furthermore the mains connector with integrated fuse holder is located in this section. A ground terminal completes the back panel connector section.

TAPE OUTPUTS

The first connectors on the left are the tape output connectors. Both left and right connectors are paralleled for connecting more than one tapedeck or DAT recorder.

Output level is -10dBv (300mV).

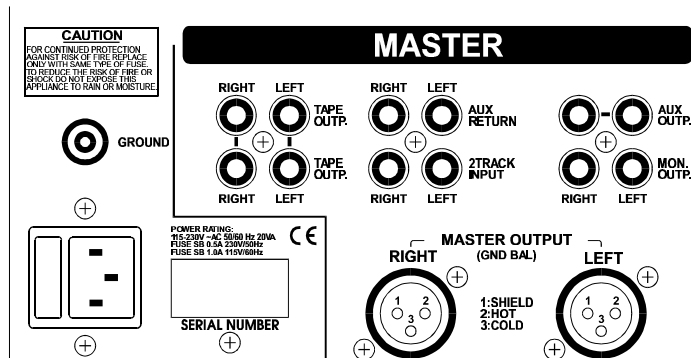


AUX RETURN

Right from the tape connectors you see the Aux return connectors. These inputs are controlled by the Aux return knob. The signal is directly connected to the master main mix busses. You can connect reverb returns or other stereo signals without using any input module. The input level should -10dBv as a minimum.

AUX OUTPUTS

The aux outputs are two paralleled Cinch connectors giving the signal coming from the aux sends in the channels. The level is +4dBu (1.22 volt). You can connect inputs from reverbs to this Cinch connector or use it as a monitor output, when you have jumpered the Aux send in the channels pre fader.

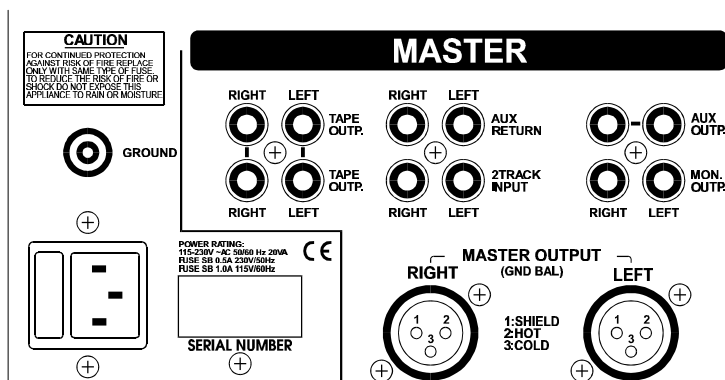

2-TRACK INPUTS

These inputs are intended to return stereo machines in the monitor section. Signals from DAT machines or tape decks. The level needs to be -10dBv (300mV) as a minimum for optimum signal to noise.

MASTER OUTPUTS

The master outputs are on male 3 pin XLR connectors in a ground compensated arrangement. Ground compensated means that all advantages of balancing are maintained when connected to a balanced input of a power amp or professional tape deck or DAT recorder. The output level is +4dBu (1.22 volt).

GROUND CONNECTOR

This terminal is intended for grounding phono players or it is to be used as central ground pin in complex set-up.

MAINS CONNECTOR

The mains inlet is a euro type connector with built in fuse. Your discom 5 can accept voltages between 210 volts and 230 volts 50/60Hz.

The built in fuse is a slow blow type of 1 Amp. never replace this fuse by higher values. In case of 115 volt local power the value of the fuse needs to be increased to 2 Amps.

SETTING UP ROUTINES

- Connect a power-amp, recorder or transmitter to the left/right outputs.
- Connect a high impedance headphone to the "phones"-jacks on the front.
- Connect the microphones as described.
- Act like wise with turntables, tapedecks and jingle machines.
- Now that everything is connected, follow the adjustment procedure.
(Note; for mics , only activate the red mic switch, for line level on input all switches in the up position)
- Put on your headphones and turn the headphone-volumecontrol to "12 o'clock" position.
- Turn all the gain-controls and the master-control to the left.
- Set all equalizer-controls to the "12 o'clock" position.
- All pushbutton-switches should be in the up position.
- Switch on the power-supply, the first led in the led bar should be on.

SETTING UP AN INPUT CHANNEL

- Depress the CUE switch in a channel that is connected to a source.
- Now slowly turn the GAIN control clockwise until you hear and see the input signal on the ledbars in the master section.
- You can change the input sound by adjusting the equalizer-section.
If you have adjusted the equalisation, once again check the level on the ledbar, because increasing specific parts of the frequency spectrum can easily add more gain to the signal.
- The ledbar indication has to be between 0 dB and +6 dB (the yellow area) to get a proper level on amplifiers or tape machines.
- The ledbar is a VU meter indicating the absolute level that enters the console.
It is calibrated to indicate 0 dB on the scale corresponding with a +4dBu output level.
- Release the CUE switch so the ledbar now reads the output signal again.
- Now fade to the "8" position screened alongside the channel faders and fully turn up the master fader. Further volume adjustments have to be realized on the power-amp.
- The other inputs are likewise adjusted, using the "CUE" switches to pre fader listen the connected sources and usage of the the input gain for precise adjustments.

Be carefully not to place the Discom 5 near heavy power transformers, as used in power amps etc, this may cause hum, inspite of the thick metal case.

WIRING SUMMARY OF ALL CONNECTORS

MIC INPUTS	XLR connector balanced impedance 2 kOhm. sensitivity -60dBu. Pin1=ground. Pin2=hot (in phase). Pin3=cold (out of phase).
LINE A/B	Cinch connector, sensitivity -20dBu to +20 dBu. sleeve =ground.
DISC INPUTS	On B inputs only when optional R.I.A.A. pre-amp is installed. 47kOhm, 0.5 mV to 10 mV.
START REMOTE	Stereo jack switched between sleeve and ring by start switch. NOT FOR 110/220 VOLT SWITCHING!!!!!!

MASTER OUTPUT CONNECTORS

MAIN	XLR male connector for left and right. pin 1 = ground. pin 2 = in phase. pin 3 = out of phase. output level = +4dBu/100Ohm.
TAPE	Two cinch connectors for left and right. -10dBv (300mV) /10kOhm. Sleeve=ground.
2 TRACK INPUTS	Cinch connectors. -10dBv (300mV) / 10kOhm. Sleeve = ground.
AUX OUPUTS	Cinch connectors (paralleled). + 4 dBu (1.22 volt) / 100 Ohm Sleeve = ground.
MONITOR OUTPUT	Cinch connectors for left and right. + 4 dBu (1.22 volt) / 100 Ohm. Sleeve = ground.
PHONES:	Preferable 400 Ohms or higher!

TECHNICAL SPECIFICATIONS

INPUTS

Mic input balanced 2 kOhm.
Mic noise -122 dBr (A-weighted).
Sensitivity: -70dB min, 0dB maximum.
Line inputs: unbalanced, 10kOhm, Cinch gain range 40dB.
Phono inputs: unbalanced, 47kOhm, 1-10 mV.
2 Track return: -10dBv at 10kOhm.
Aux return: -10dBv at 10kOhm.

OUTPUTS

Left/Right/Monitor/Aux: +4dBu (1.55volt) at 47 Ohm.
Tape output: -10dBv at 1kOhm.
Headphone: 400-600 Ohm, 500mW.

EQUALIZER

High: +/- 12 dB at 12kHz shelving curve.
Mid: +/- 12 dB at 1 kHz bell curve.
Low: +/- 12 dB at 60 Hz bell curve.

OVERALL

Frequency response 10-60.000 Hz (+/- 0.5dB).
Distortion: <0.009% max at 1 kHz.
Dimensions: 483x356x95 mm (8HE) .
Weight: 9 kg.

DECLARATION OF CONFORMITY

Manufacturers Name: D&R Electronica Weesp b.v.

Manufacturers Address: Rijnkade 15B,
1382 GS Weesp,
The Netherlands

declares that the product

DISCOM 5 series

conforms to the following product specifications:

EMC:	NEN-EN 55103-1	1995
	NEN-EN 55103-2	1995
	NEN-EN 55013-1	1994

Supplementary Information:

The products herewith complies with the requirements of the EMC Directive 89/336/EEC (1989) as amended by the CE Marking Directive 93/68/EEC (1993).

**D&R Electronica Weesp b.v.
Rijnkade 15 B
1382 GS WEESP
The Netherlands
President of Engineering**

(*) The product is tested in a normal users environment.

PRODUCT SAFETY

This product is manufactured with the highest standards and is double checked in our quality control department for reliability in the "HIGH VOLTAGE" section.

CAUTION

Never remove any panels, or open this equipment. No user servicable parts inside.

Equipment power supply must be grounded at all times.

Only use this product as described, in user manual or brochure.

Do not operate this equipment in high humidity or expose it to water or other liquids.

Check the AC power supply cable to assure secure contact.

Have your equipment checked yearly by a qualified dealer service center.

Hazardous electrical shock can be avoided by carefully following the above rules.

EXTRA CAUTION FOR LIVE SOUND

Ground all equipment using the ground pin in the AC power supply cable. Never remove this pin. Ground loops should be eliminated only by use of isolation transformers for all inputs and outputs. Replace any blown fuse with the same type and rating only after equipment has been disconnected from AC power. If problem persists, return equipment to qualified service technician

PLEASE READ THE FOLLOWING INFORMATION

Especially in sound equipment on stage the following information is essential to know.

An electrical shock is caused by voltage and current, actually it is the current that causes the shock.

In practise the higher the voltage the higher the current will be and the higher the shock.

But there is another thing to consider and it is resistance. When the resistance in Ohms is high between two poles, the current will be low and vica versa.

All three of these; voltage, current, and resistance are important in determining the effect of an electrical shock.

However, the severity of a shock primarily determined by the amount of current flowing through a person.

A person can feel a shock because the muscles in a body respond to electrical current and because the heart is a muscle it can affect, when the current is high enough. Current can also be fatal when it causes the chest muscles to contract and stop breathing. At what potential is current dangerous.

Well the first feeling of current is a tingle at 0.001 Amp of current. The current between 0.1 Amp and 0.2 Amp is fatal.

Imagine that your home fuses of 20 Amp can handle 200 times more current than is necessary to kill. How does resistance affect the shock a person feels. A typical resistance between one hand to the other in "dry" condition could well over 100,000 Ohm.

If you are playing on stage your body is perspiring extensively and your body resistance is lowered by more than 50%. This is a situation in which current can easily flow.

Current will flow when there is a difference in ground potential between equipment on stage and in the P.A. system. Please do check if there is any potential between the housing of the mikes and the guitarsynth amps, which will be linked by your body on stage. Imagine, a guitar in your hand and your lips close to the mike! A ground potential difference of above 10 volts is not unusual, in improperly wired buildings it can possibly be as high as 240 volts.

Although removing the ground wire sometimes cures a system hum, it will create a very hazardous situation for the performing musician.

Always earth all your equipment by the grounding pin in your mains plug.

Hum loops should be only cured by proper wiring and isolation input/output transformers.

Replace fuses always with the same type and rating after the equipment has been turned off and unplugged.

If the fuse blows again you have an equipment failure, do not use it again and return it to your dealer for repair.


And last but not least be carefull not to touch a person being shocked as you, yourself could also be shocked.

Once removed from the shock, have someone send for medical help immediately


Always keep the above mentioned information in mind when using electrically powered equipment.

D&R Electronica Weesp b.v.
Rijnkade 15B
1382 GS, WEESP
The Netherlands
Phone: ++31 294 418 014
FAX: ++31 294 416 987

Website: <http://www.d-r.nl>
E-mail: info@d-r.nl

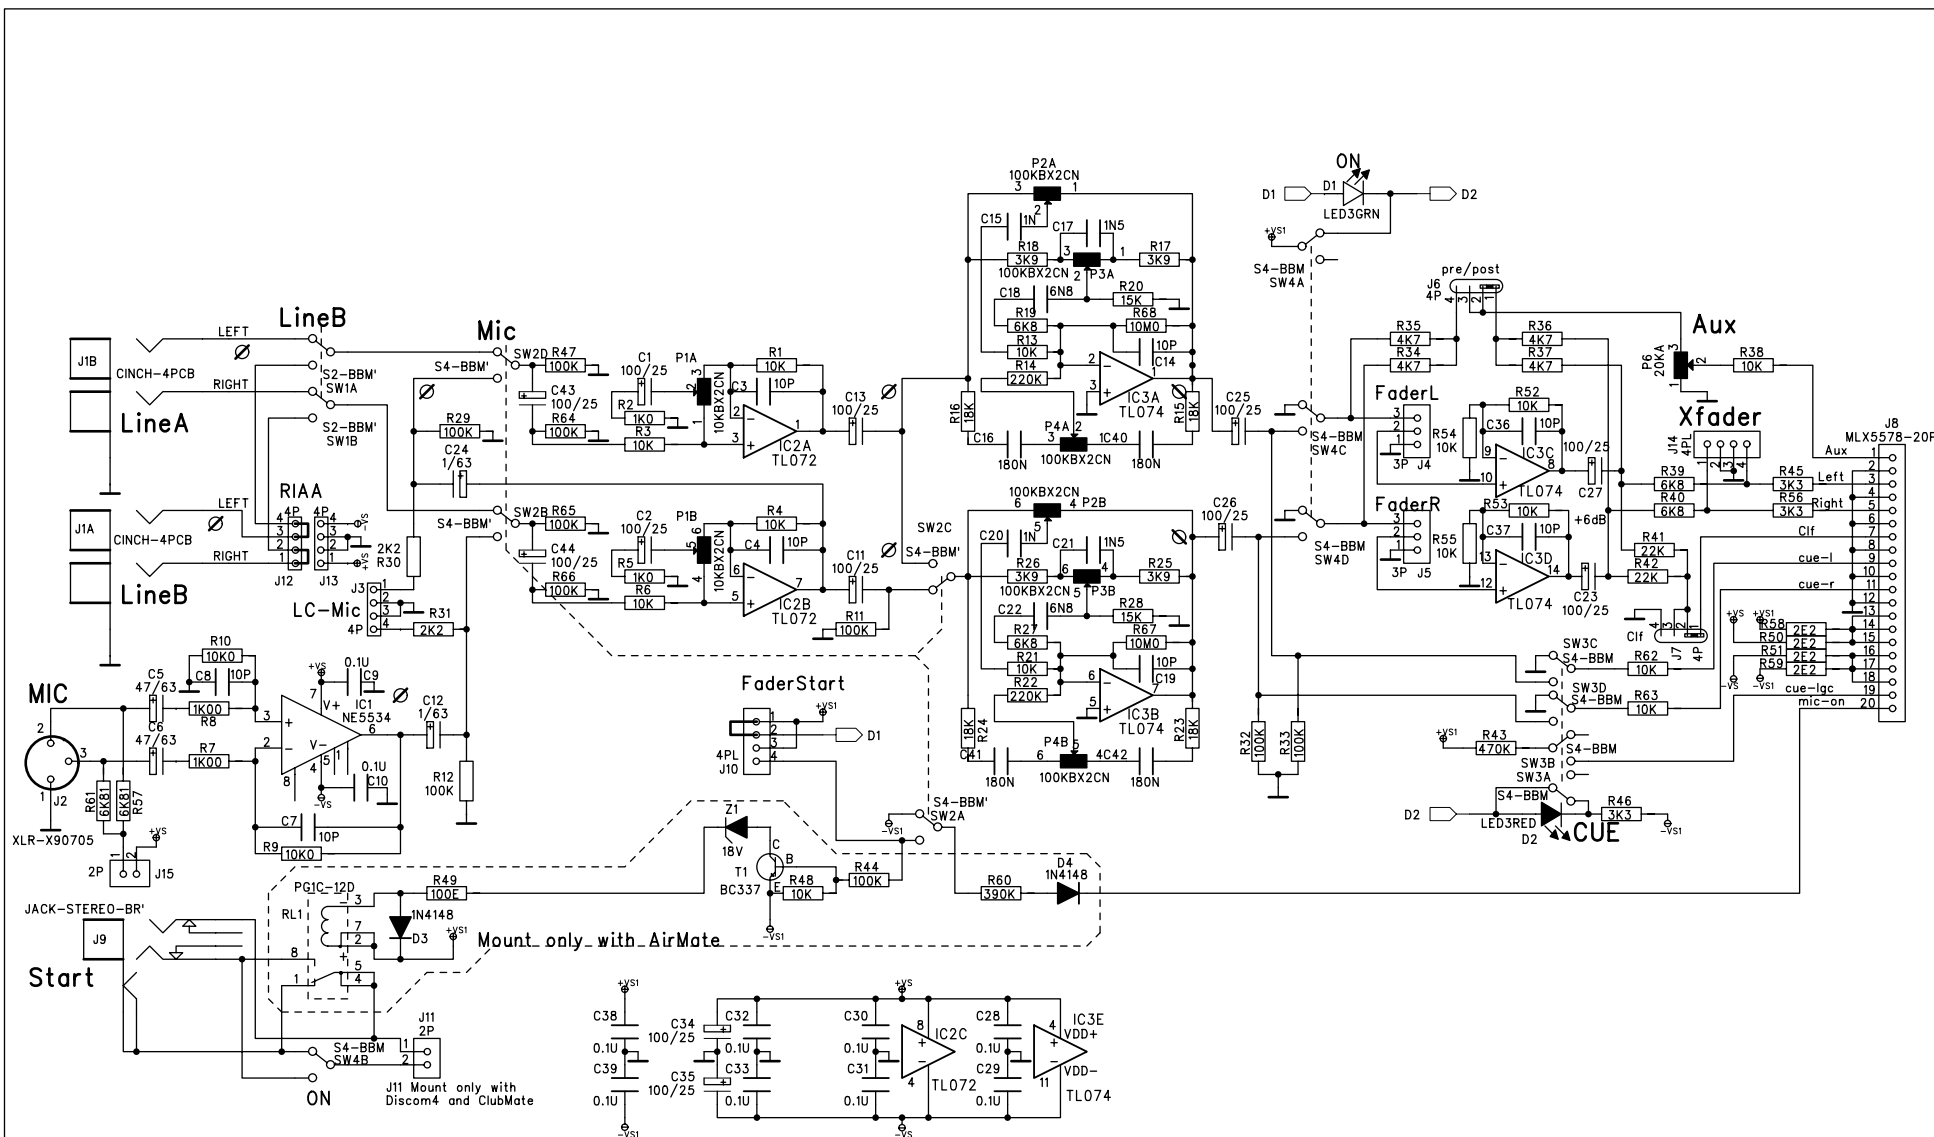

 Rijnkade 15b 1382 GS Weesp The Netherlands phone: 0294-418014 fax: 0294-416987	Project: Discom4	
	Title: Discom41 CH	
	File: discm41a.sch	Rev: A
	Date: 9-1996	
	Sheet: 1 of 1	
Design: Jan Betten		

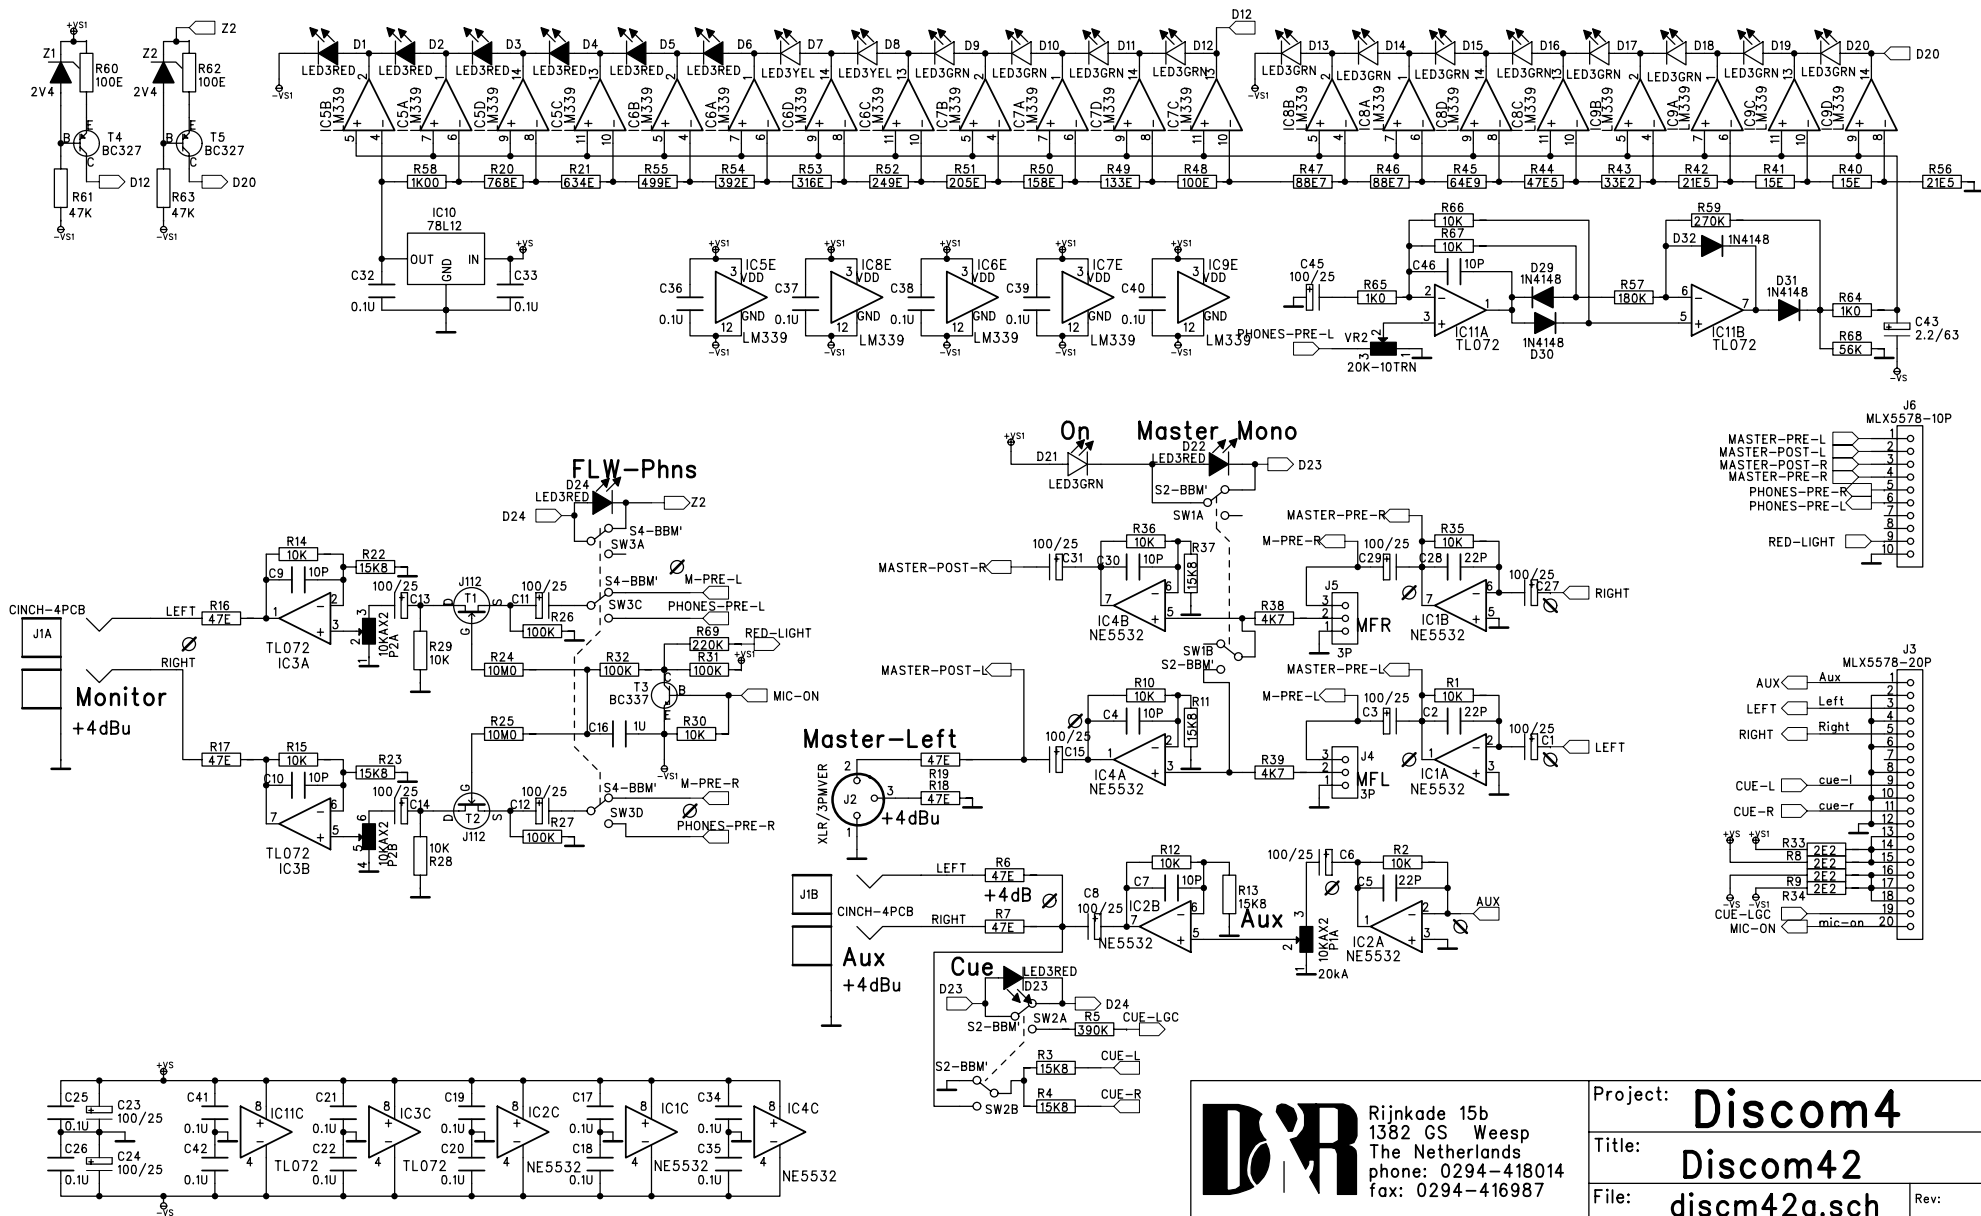


D&R Rijnsdijk 15b
1382 GS Weesp
The Netherlands
phone: 0294-418014
fax: 0294-416987


D&R Electronica B.V.

Design: Jan Betten


Project:	Discom4	Rev: A
Title:	Discom42	
File:	discm42a.sch	
Date:	9-1996	
Sheet:	1 of 1	

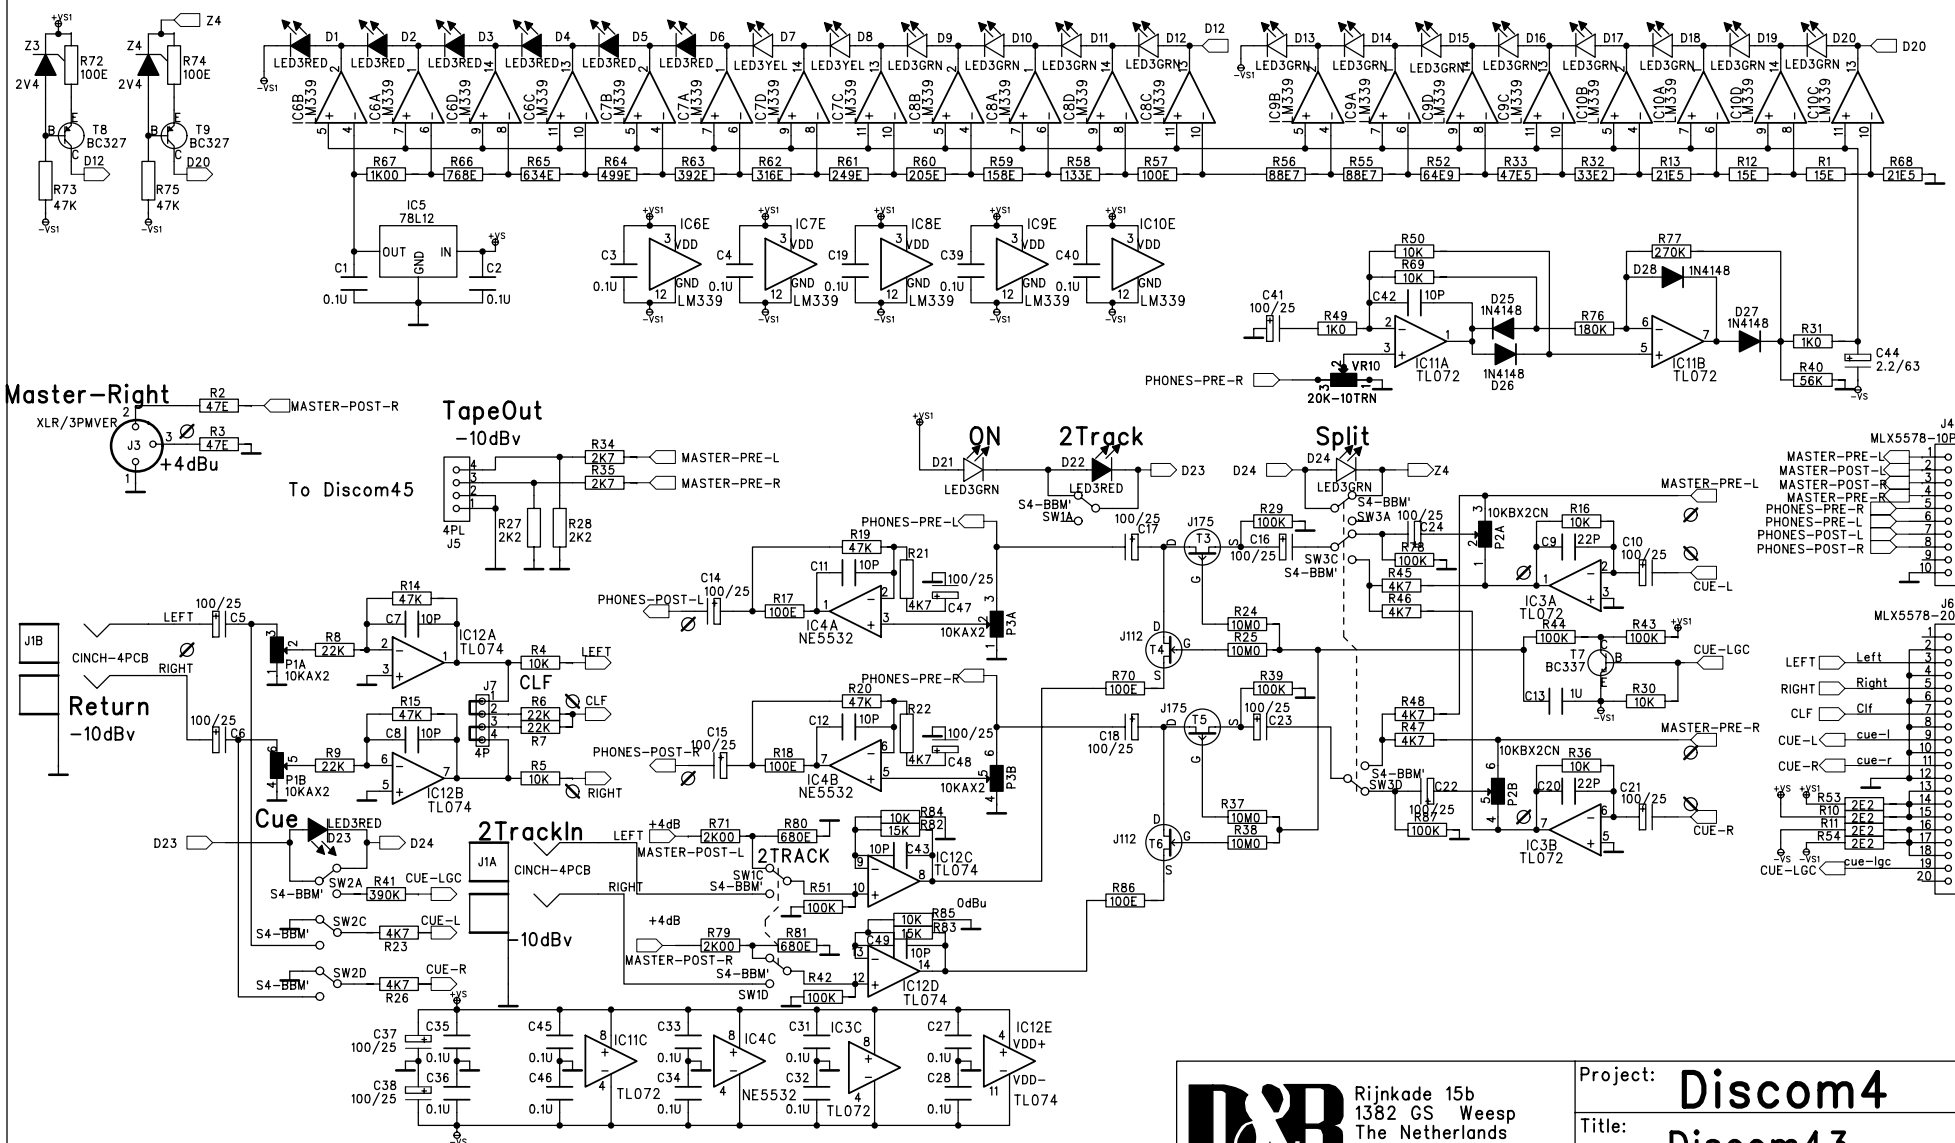

 D&R Electronica B.V.	Rijnkade 15b 1382 GS Weesp The Netherlands phone: 0294-418014 fax: 0294-416987	
	Design: Jan Betten	
	Project: Discom4	
	Title: Discom43	
	File: discm43a.sch	Rev: A
Date: 9-1996		
Sheet: 1 of 1		

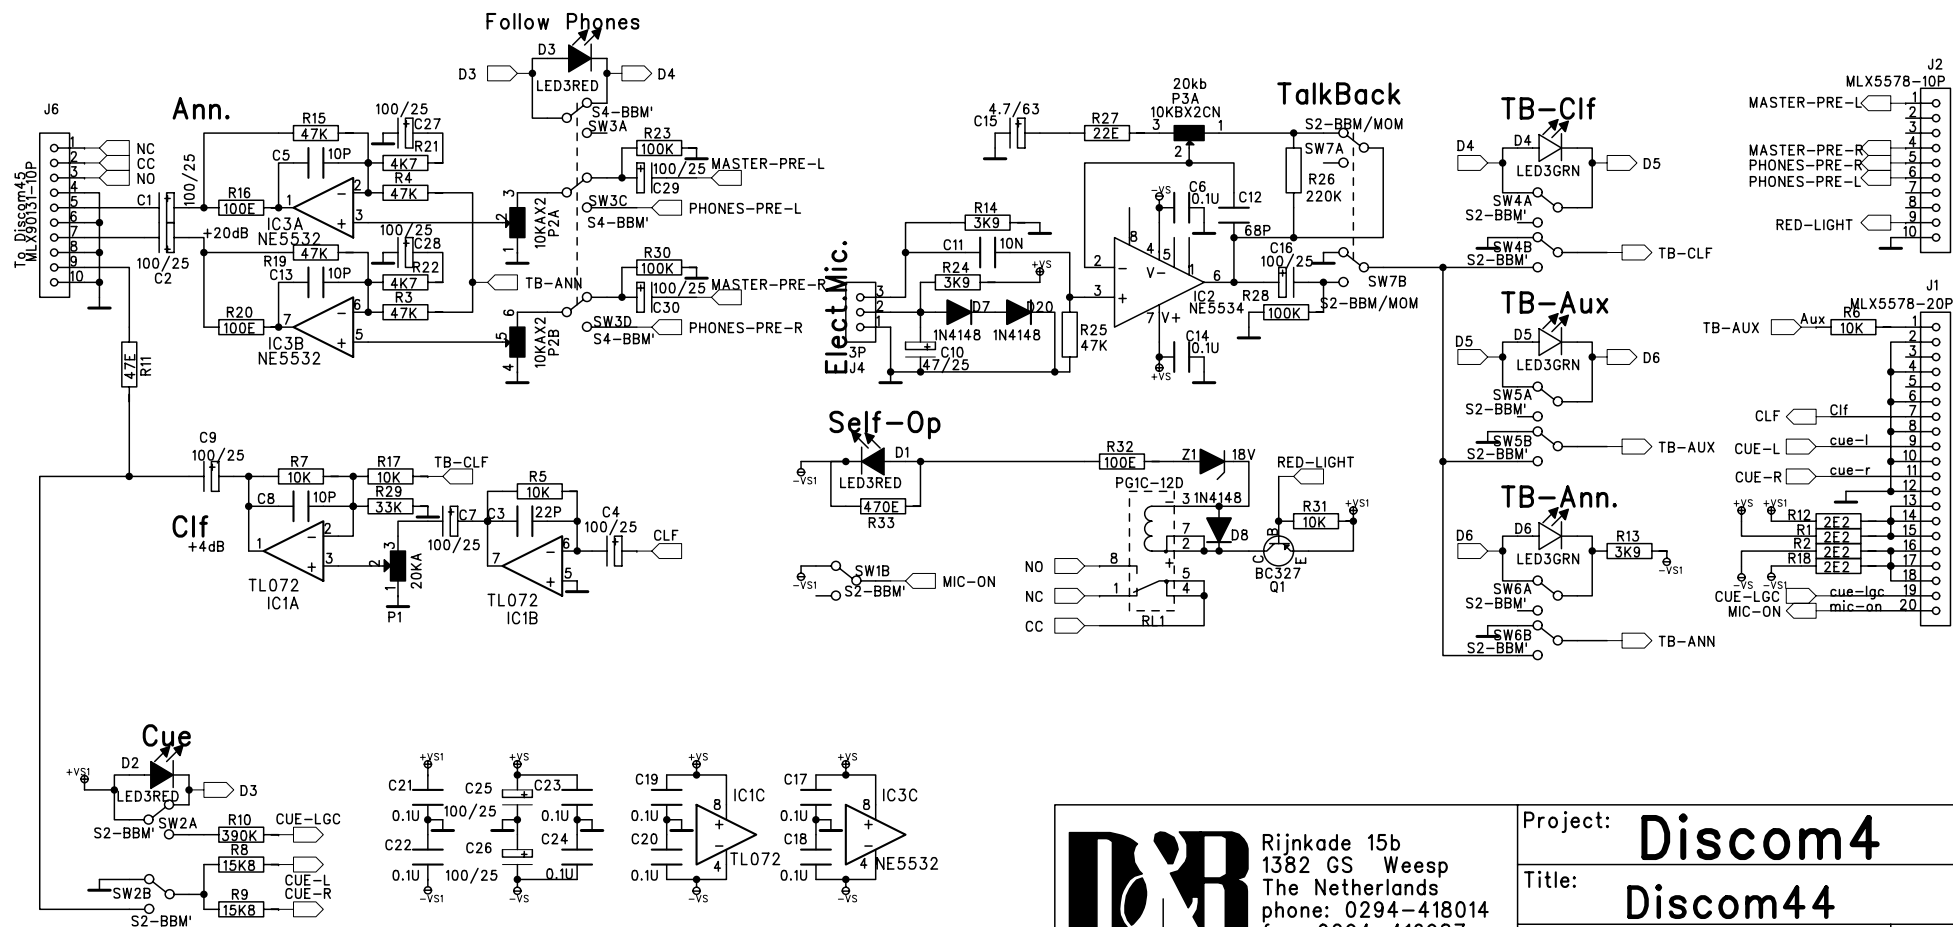

 Rijnkade 15b 1382 GS Weesp The Netherlands phone: 0294-418014 fax: 0294-416987		Project: Discom4	
		Title: Discom44	
D&R Electronica B.V.		File: discm44a.sch	Rev: A
		Date: 9-1996	
Design: Jan Betten		Sheet: 1 of 1	

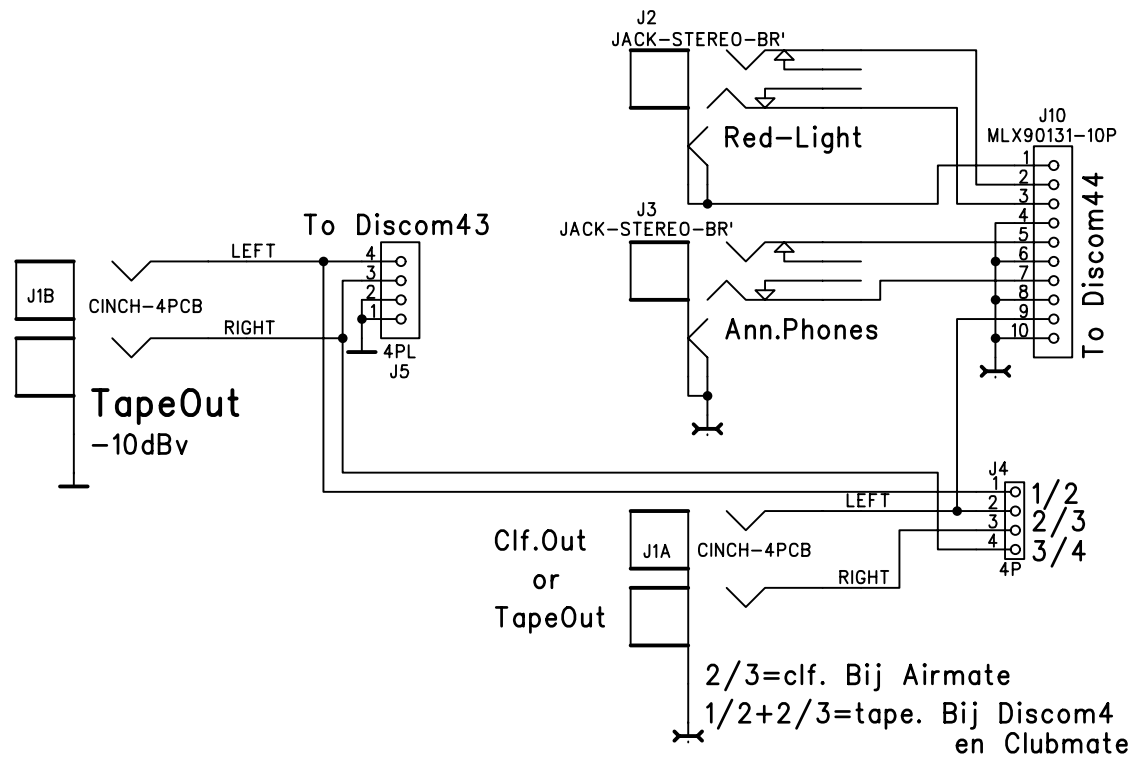

Rijnkade 15b
1382 GS Weesp
The Netherlands
phone: 0294-418014
fax: 0294-416987

D&R Electronica B.V.

Design: Jan Betten

Project: **Discom4**

Title: **Discom45 Com.**






File: **discm45a.sch**

Date: **9-1996**

Sheet: **1 of 1**

Rev:

A

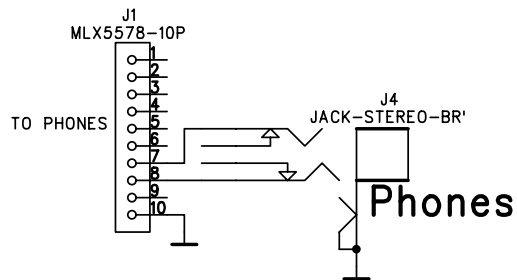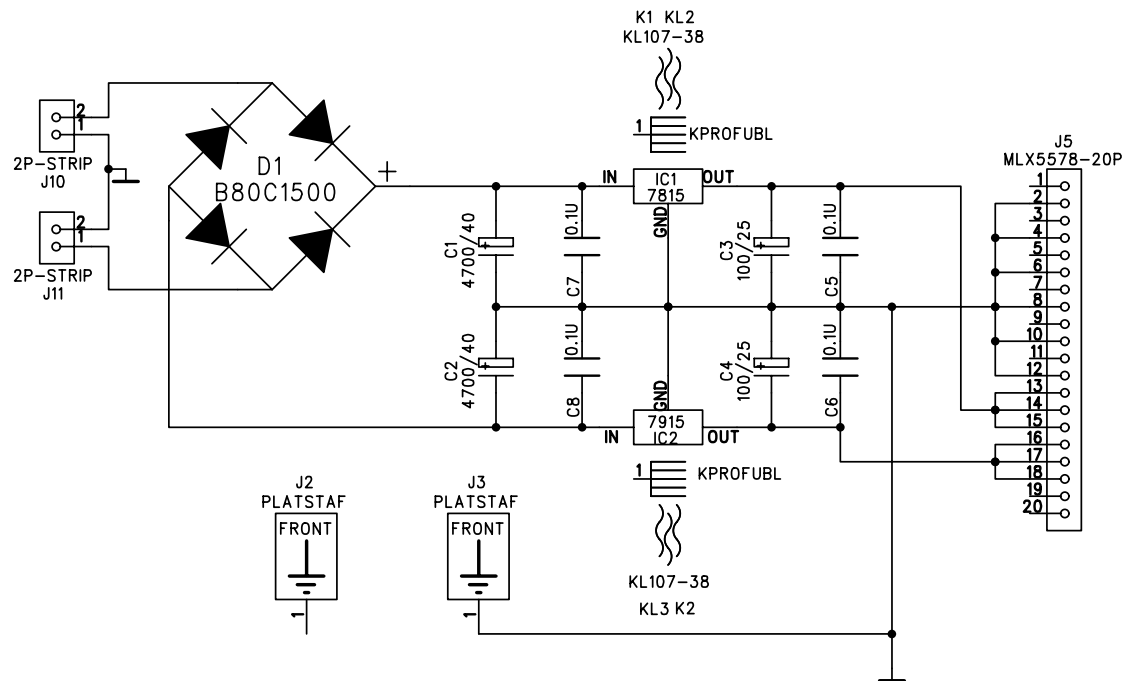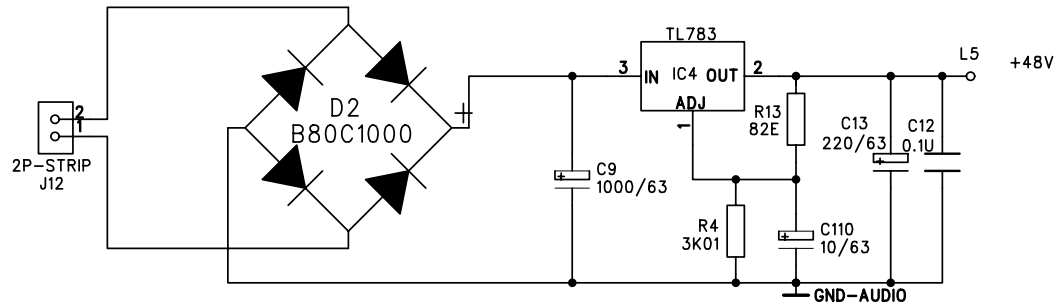

Rijkade 15b
1382 GS Weesp
The Netherlands
phone: 0294-418014
fax: 0294-416987

D&R Electronica B.V.

Design: D de Rijk

Project: **Discom4**

Title: **Discom46 Voeding**



File: **discm46c.sch**

Date: **02-1997**

Sheet: **1 of 1**

Rev:

C

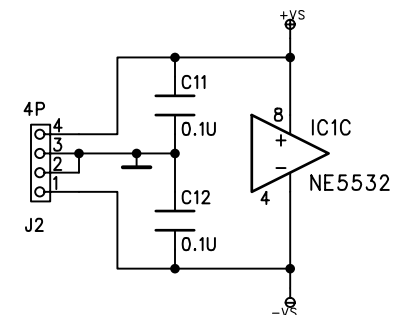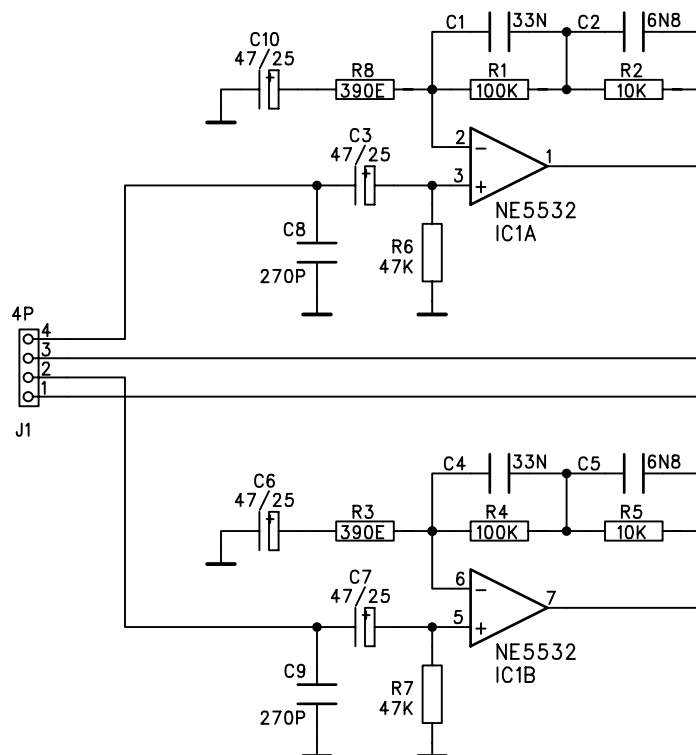

Rijkade 15b
1382 GS Weesp
The Netherlands
phone: 0294-418014
fax: 0294-416987

D&R Electronica B.V.

Design: D. de Rijk

Project: **Pre Amp**

Title: **RIAA**

File: **riaa_a.sch**

Date: **18-05-1990**

Sheet: **1 of 1**

Rev:

A

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
470	10700076	Adereindhuls ong. 0.75mm/L=6		2.0000	st	
10	10101204	Backpanel Discom4-a		1.0000	st	
580	10700929	Bout M3x20 RVS D7985 BCK		1.0000	st	
460	10600007	Cablesocket + hole M3 red		1.0000	st	
620	10600016	Cablesocket + hole M5 blue		1.0000	st	
90	10450153	Cap SiFam 11mm black/5 bulk		8.0000	st	
110	10450195	Cap SiFam 11mm grey bulk C111		19.0000	st	
80	10450152	Cap SiFam 11mm red/7bulk C111		8.0000	st	
670	10600171	Conn 3p wired 1=blk/grn/red		4.0000	st	
40	10600173	Conn 3p wrd 2U084-018-0387		10.0000	st	
520	10600174	Conn 4p wrd 2U084-243-D289		5.0000	st	
600	10600434	Conn flatcable 10p female		3.0000	st	
50	10600470	Conn flatcable 20p fem ROHS		9.0000	st	
130	10800943	Doos Discom/Airmate WIT		1.0000	st	
140	10700002	Druknagel wit (nylon)		3.0000	st	
530	10990703	FUSE 500mA slow 5x20mm		1.0000	st	
220	10300088	Fader ALPS N RS60N12 hor		2.0000	st	
550	10300079	Fader ALPS-RS60N12B9 10KAx2ver		4.0000	st	
150	10300003	Fader Alps N 100mm vert Stereo		2.0000	st	
590	10650446	Flatcable 10p r1.27		20.0000	cm	
20	10650448	Flatcable 20p r1.27		60.0000	cm	
190	10150442	Frame Discom-5B		1.0000	st	
170	10101205	Front Crossfader/a		1.0000	st	
160	10101206	Front Discom5 /B		1.0000	st	
500	10500701	Insul. plate Clubm/Discom PVC		1.0000	st	
180	10700625	Kartelring M3 (buitenvertand)		4.0000	st	
650	10700910	Kartelring M5 (buitenvertand)		2.0000	st	
30	10450111	Knob Fdr SiF black15/wh. 1.2x8		2.0000	st	
250	10450113	Knob Fdr SiF blk15-Tshft/whit		6.0000	st	
260	10450112	Knob Fdr SiF blk11-rub/w 1.2x8		1.0000	st	
270	10450103	Knob SiFam grey splined (11mm)		35.0000	st	
240	10450010	Knob TAK12x12-107 A3.3 Black		6.0000	st	
300	10250386	Led 3mm green SLR-03A210-020		33.0000	st	
310	10250387	Led 3mm red SLR-03A510-020		15.0000	st	
290	10250388	Led 3mm yellow SLR-03A610-020		6.0000	st	
60	10600701	Mains inlet SKT MS3 + FR MS3		1.0000	st	
340	10600498	Mains lead 3 core Euroconnecto		1.0000	st	
540	10700610	Moer M3		3.0000	st	
510	10650375	Montagesnoer 0,4 mm ² (groen)		40.0000	cm	
320	10650371	Montagesnoer 0,4 mm ² (rood)		40.0000	cm	
610	20851424	PCB ins Crosfader		1.0000	st	
410	20851218	PCB ins. D41 (disc/clubch)		6.0000	st	
420	20851212	PCB ins. D42 (masterL)		1.0000	st	
430	20851213	PCB ins. D43 (masterR)		1.0000	st	
440	20851217	PCB ins. D45 (disc/club)		1.0000	st	
400	20851216	PCB ins. D46 (ps)		1.0000	st	
370	10700603	Parker 2.9x9,5 verz PD D7981		9.0000	st	
350	10700656	Plakvoet SJ-5012		4.0000	st	
360	10700690	Platstaf 25x10x10mm M3+2holes		2.0000	st	
380	10700611	Popnagel 3x6 blank		3.0000	st	
210	10450209	Pushb SiF 2.8 black-sq K54437		8.0000	st	
230	10450208	Pushb SiF 2.8 grey-sq K54436		10.0000	st	
660	10700009	Rubber neopreenband 30x2 L=20		20.0000	cm	
450	10800958	Schuimblok 40x140x280mm		3.0000	st	
200	10800957	Schuimhoek Polycorner 44635		4.0000	st	
630	10700111	Schuimplaat 1200x520x10mm HLTR		0.3300	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
280	10500684	Shrinksleeve 38.1>19.0 black		5.0000	cm	
560	10500682	Shrinksleeve 6.4>3.2 black		9.0000	cm	
330	10550020	Switch mains small blk no lmp		1.0000	st	
480	10700786	Taptite M3x5 verzkop/pozidr/zw		18.0000	st	
490	10700787	Taptite M3x6 bolkoppozidr/zwrt		5.0000	st	
390	10700790	Taptite M3x6 verzkop/pozidr/zw		20.0000	st	
640	10700788	Taptite M3x8 verzkop/pozidr/zw		10.0000	st	
70	10600482	Terminal post black		1.0000	st	
570	10650389	Wire 13cm 1007#20*130mm5T-BLU		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
340	10400213	Capacitor 10p R2.5 kerk		6.0000	st	
350	10400217	Capacitor 22p R2.5 3mm		3.0000	st	
360	10401241	Capacitor 100n/50V R5.0 ker		19.0000	st	
370	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
490	10600535	Conn Cinch 4xPCB gold pl bush		1.0000	st	
10	10250342	Diode 1N4148 (signal)		4.0000	st	
460	10400280	Elco 2u2/50V radial R5.0		1.0000	st	
470	10400292	Elco 100uF/ 25V rad R5.0		15.0000	st	
450	10250338	Fet J112 (N-channel switch)		2.0000	st	
480	10600511	Header 3P Lock 0° R 2.54		2.0000	st	
500	10600452	Header 10p 90° R2.54		1.0000	st	
510	10600456	Header 20p 90° R2.54		1.0000	st	
390	10250325	IC 78L12 T092 SGS (volt.reg)		1.0000	st	
400	10250316	IC LM339 (comparator)		5.0000	st	
410	10250307	IC NE5532 AP TI (dual-opamp)		3.0000	st	
420	10250304	IC TL072 CP TI DIL-8		2.0000	st	
580	10600394	IC-socket 8 pins		5.0000	st	
590	10600395	IC-socket 14 pins:fork-contact		5.0000	st	
570	10201212	PCB D42-B (master left)		1.0000	st	
560	10300423	RK09 10KAx2 Short version		1.0000	st	
550	10300422	RK09 20KA Short version		1.0000	st	
70	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
320	10350912	Resistor 1k00 1% 1/4W		1.0000	st	
30	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
80	10350737	Resistor 4k7 5% 1/4W		2.0000	st	
90	10350741	Resistor 10K 5% 1/4W		13.0000	st	
170	10350776	Resistor 10M0 5% 1/4W		2.0000	st	
40	10350707	Resistor 15E 5% 1/4W		2.0000	st	
330	10350853	Resistor 15k8 1% 1/4W		1.0000	st	
180	10350909	Resistor 21E5 1% 1/4W		2.0000	st	
190	10350808	Resistor 33E2 1% 1/4W		1.0000	st	
50	10350713	Resistor 47E 5% 1/4W		6.0000	st	
200	10350807	Resistor 47E5 1% 1/4W		1.0000	st	
100	10350749	Resistor 47K 5% 1/4W		2.0000	st	
110	10350750	Resistor 56k 5% 1/4W		1.0000	st	
210	10350911	Resistor 64E9 1% 1/4W		1.0000	st	
220	10350809	Resistor 88E7 1% 1/4W		2.0000	st	
60	10350717	Resistor 100E 5% 1/4W		3.0000	st	
120	10350753	Resistor 100K 5% 1/4W		4.0000	st	
230	10350805	Resistor 133E 1% 1/4W		1.0000	st	
240	10350906	Resistor 158E 1% 1/4W		1.0000	st	
130	10350756	Resistor 180k 5% 1/4W		1.0000	st	
250	10350812	Resistor 205E 1% 1/4W		1.0000	st	
140	10350757	Resistor 220k 5% 1/4W		1.0000	st	
260	10350887	Resistor 249E 1% 1/4W		1.0000	st	
150	10350758	Resistor 270k 5% 1/4W		1.0000	st	
270	10350815	Resistor 316E 1% 1/4W		1.0000	st	
160	10350760	Resistor 390k 5% 1/4W		1.0000	st	
280	10350818	Resistor 392E 1% 1/4W		1.0000	st	
290	10350898	Resistor 499E 1% 1/4W		1.0000	st	
300	10350902	Resistor 634E 1% 1/4W		1.0000	st	
310	10350825	Resistor 768E 1% 1/4W		1.0000	st	
530	10550414	Switch Alps 2pole mini NS		2.0000	st	
540	10550415	Switch Alps 4pole mini NS		1.0000	st	
430	10250333	Transistor BC327/25-RR (TAPE)		2.0000	st	
440	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
380	10300166	Trimmer 20k 15turn (T18)		1.0000	st	
520	10600798	XLR chass male pl X906-02		1.0000	st	
20	10250340	Zenerdiode 2V4 / 400mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
380	10400213	Capacitor 10p R2.5 kerk		7.0000	st	
390	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
400	10401241	Capacitor 100n/50V R5.0 ker		17.0000	st	
410	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
560	10600535	Conn Cinch 4xPCB gold pl bush		1.0000	st	
10	10250342	Diode 1N4148 (signal)		4.0000	st	
520	10400280	Elco 2u2/50V radial R5.0		1.0000	st	
530	10400292	Elco 100uF/ 25V rad R5.0		17.0000	st	
500	10250338	Fet J112 (N-channel switch)		2.0000	st	
510	10250017	Fet J175 (P-channel switch)		2.0000	st	
540	10600478	Header 4P 0° R 2.54		1.0000	st	
550	10600512	Header 4P Lock 0° 2.54		1.0000	st	
570	10600452	Header 10p 90° R2.54		1.0000	st	
580	10600456	Header 20p 90° R2.54		1.0000	st	
430	10250325	IC 78L12 T092 SGS (volt.reg)		1.0000	st	
440	10250316	IC LM339 (comparator)		5.0000	st	
450	10250307	IC NE5532 AP TI (dual-opamp)		1.0000	st	
460	10250304	IC TL072 CP TI DIL-8		2.0000	st	
470	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
640	10600394	IC-socket 8 pins		3.0000	st	
650	10600395	IC-socket 14 pins:fork-contact		6.0000	st	
630	10201213	PCB D43-B (master right)		1.0000	st	
610	10300423	RK09 10KAX2 Short version		2.0000	st	
620	10300420	RK09 10KBx2cc Short version		1.0000	st	
80	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
360	10350912	Resistor 1k00 1% 1/4W		1.0000	st	
30	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
370	10350835	Resistor 2k00 1% 1/4W		2.0000	st	
90	10350733	Resistor 2k2 5% 1/4W		2.0000	st	
100	10350734	Resistor 2k7 5% 1/4W		2.0000	st	
110	10350737	Resistor 4k7 5% 1/4W		8.0000	st	
120	10350741	Resistor 10K 5% 1/4W		9.0000	st	
210	10350776	Resistor 10M0 5% 1/4W		4.0000	st	
40	10350707	Resistor 15E 5% 1/4W		2.0000	st	
130	10350743	Resistor 15k 5% 1/4W		2.0000	st	
220	10350909	Resistor 21E5 1% 1/4W		2.0000	st	
140	10350745	Resistor 22k 5% 1/4W		4.0000	st	
230	10350808	Resistor 33E2 1% 1/4W		1.0000	st	
50	10350713	Resistor 47E 5% 1/4W		2.0000	st	
240	10350807	Resistor 47E5 1% 1/4W		1.0000	st	
150	10350749	Resistor 47K 5% 1/4W		6.0000	st	
160	10350750	Resistor 56k 5% 1/4W		1.0000	st	
250	10350911	Resistor 64E9 1% 1/4W		1.0000	st	
260	10350809	Resistor 88E7 1% 1/4W		2.0000	st	
60	10350717	Resistor 100E 5% 1/4W		7.0000	st	
170	10350753	Resistor 100K 5% 1/4W		8.0000	st	
270	10350805	Resistor 133E 1% 1/4W		1.0000	st	
280	10350906	Resistor 158E 1% 1/4W		1.0000	st	
180	10350756	Resistor 180k 5% 1/4W		1.0000	st	
290	10350812	Resistor 205E 1% 1/4W		1.0000	st	
300	10350887	Resistor 249E 1% 1/4W		1.0000	st	
190	10350758	Resistor 270k 5% 1/4W		1.0000	st	
310	10350815	Resistor 316E 1% 1/4W		1.0000	st	
200	10350760	Resistor 390k 5% 1/4W		1.0000	st	
320	10350818	Resistor 392E 1% 1/4W		1.0000	st	
330	10350898	Resistor 499E 1% 1/4W		1.0000	st	
340	10350902	Resistor 634E 1% 1/4W		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
70	10350727	Resistor 680E 5% 1/4W		2.0000	st	
350	10350825	Resistor 768E 1% 1/4W		1.0000	st	
660	10600414	Shunt 2p (mini jumper)		2.0000	st	
600	10550415	Switch Alps 4pole mini NS		3.0000	st	
480	10250333	Transistor BC327/25-RR (TAPE)		2.0000	st	
490	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	
420	10300166	Trimmer 20k 15turn (T18)		1.0000	st	
590	10600798	XLR chass male pl X906-02		1.0000	st	
20	10250340	Zenerdiode 2V4 / 400mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
210	10401253	Capacitor 10n R5.0 poly		1.0000	st	
170	10400213	Capacitor 10p R2.5 kerk		3.0000	st	
180	10400217	Capacitor 22p R2.5 3mm		1.0000	st	
190	10400223	Capacitor 68p R2.5 ker		1.0000	st	
200	10401241	Capacitor 100n/50V R5.0 ker		10.0000	st	
20	10250342	Diode 1N4148 (signal)		3.0000	st	
280	10400281	Elco 4u7/ 50V radial R5.0		1.0000	st	
270	10400287	Elco 47uF/ 25V radial R5.0		1.0000	st	
290	10400292	Elco 100uF/ 25V rad R5.0		12.0000	st	
300	10600478	Header 4P 0° R 2.54		1.0000	st	
310	10600506	Header 10P box 0° 2.54		1.0000	st	
320	10600452	Header 10p 90° R2.54		1.0000	st	
330	10600456	Header 20p 90° R2.54		1.0000	st	
220	10250307	IC NE5532 AP TI (dual-opamp)		1.0000	st	
230	10250306	IC NE5534 AP TI (single-opamp)		1.0000	st	
240	10250304	IC TL072 CP TI DIL-8		1.0000	st	
410	10600394	IC-socket 8 pins		3.0000	st	
400	10201214	PCB D44-b (comm)		1.0000	st	
380	10300423	RK09 10KAx2 Short version		1.0000	st	
390	10300420	RK09 10KBx2cc Short version		1.0000	st	
370	10300422	RK09 20KA Short version		1.0000	st	
260	10550001	Relay D1C121000 1xchnge minid		1.0000	st	
30	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
80	10350736	Resistor 3k9 5% 1/4W		3.0000	st	
90	10350737	Resistor 4k7 5% 1/4W		2.0000	st	
100	10350741	Resistor 10K 5% 1/4W		5.0000	st	
160	10350853	Resistor 15k8 1% 1/4W		2.0000	st	
40	10350709	Resistor 22E 5% 1/4W		1.0000	st	
110	10350747	Resistor 33k 5% 1/4W		1.0000	st	
50	10350713	Resistor 47E 5% 1/4W		1.0000	st	
120	10350749	Resistor 47K 5% 1/4W		5.0000	st	
60	10350717	Resistor 100E 5% 1/4W		3.0000	st	
130	10350753	Resistor 100K 5% 1/4W		3.0000	st	
140	10350757	Resistor 220k 5% 1/4W		1.0000	st	
150	10350760	Resistor 390k 5% 1/4W		1.0000	st	
70	10350725	Resistor 470E 5% 1/4W		1.0000	st	
350	10550395	Switch Alps 2p-ns MOMENT		1.0000	st	
340	10550414	Switch Alps 2pole mini NS		5.0000	st	
360	10550415	Switch Alps 4pole mini NS		1.0000	st	
250	10250333	Transistor BC327/25-RR (TAPE)		1.0000	st	
10	10250350	Zenerdiode 18V0/400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
30	10600535	Conn Cinch 4xPCB gold pl bush		1.0000	st	
20	10600478	Header 4P 0° R 2.54		1.0000	st	
10	10600512	Header 4P Lock 0° 2.54		1.0000	st	
60	10600506	Header 10P box 0° 2.54		1.0000	st	
40	10600530	Jack Break slimline S253-84		2.0000	st	
50	10201215	PCB D45-b (tape)		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
190	10700929	Bout M3x20 RVS D7985 BCK		1.0000	st	
210	10600007	Cablesocket + hole M3 red		2.0000	st	
30	10401241	Capacitor 100n/50V R5.0 ker		4.0000	st	
100	10600180	Conn 2p Mains Terminal 5mm		1.0000	st	
70	10400292	Elco 100uF/ 25V rad R5.0		2.0000	st	
80	10400299	Elco 4700uF/ 40V axial		2.0000	st	
90	10600478	Header 4P 0° R 2.54		2.0000	st	
120	10600452	Header 10p 90° R2.54		1.0000	st	
130	10600456	Header 20p 90° R2.54		1.0000	st	
140	10720668	Heatsink SK64/37.5 SA-1xM3		2.0000	st	
40	10250320	IC 7815 T0220 Toshiba volt.reg		1.0000	st	
50	10250321	IC 7915 T0220 ONS (volt.reg)		1.0000	st	
110	10600530	Jack Break slimline S253-84		1.0000	st	
180	10700625	Kartelring M3 (buitenvertand)		6.0000	st	
170	10700610	Moer M3		3.0000	st	
200	10650375	Montagesnoer 0,4 mm ² (groen)		25.0000	cm	
150	10201216	PCB D46-b (ps)		1.0000	st	
10	10250346	Rect. B80C1500 (rectang)		1.0000	st	
20	10350517	Resistor 0E 5% 1/4W		1.0000	st	
160	10700616	Taptite M3x10 bolkopozidr/zw.		6.0000	st	
60	10950602	Transf.PCB 25VA 2x18/2x115+Shl		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
30	10600535	Conn Cinch 4xPCB gold pl bush		1.0000	st	
20	10600478	Header 4P 0° R 2.54		1.0000	st	
10	10600512	Header 4P Lock 0° 2.54		1.0000	st	
50	10600506	Header 10P box 0° 2.54		1.0000	st	
40	10201215	PCB D45-b (tape)		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
210	10401246	Capacitor 1n0 R5.0 poly		2.0000	st	
230	10401251	Capacitor 6n8 R5.0 poly		2.0000	st	
190	10400213	Capacitor 10p R2.5 kerk		8.0000	st	
200	10401241	Capacitor 100n/50V R5.0 ker		10.0000	st	
240	10401263	Capacitor 180n R5.0 poly		4.0000	st	
220	10401247	Capacitor 1n5 R5.0 poly		2.0000	st	
360	10600535	Conn Cinch 4xPCB gold pl bush		1.0000	st	
290	10400289	Elco 47uF/ 63V radial R5.0		2.0000	st	
300	10400292	Elco 100uF/ 25V rad R5.0		12.0000	st	
280	10400279	Elco 1uF/100V radial R5.0		2.0000	st	
320	10600505	Header 2p pin 0° sngl		2.0000	st	
330	10600511	Header 3P Lock 0° R 2.54		2.0000	st	
340	10600478	Header 4P 0° R 2.54		4.0000	st	
310	10600170	Header 4P 0° female pcb		1.0000	st	
350	10600512	Header 4P Lock 0° 2.54		2.0000	st	
380	10600456	Header 20p 90° R2.54		1.0000	st	
250	10250306	IC NE5534 AP TI (single-opamp)		1.0000	st	
260	10250304	IC TL072 CP TI DIL-8		1.0000	st	
270	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
460	10600394	IC-socket 8 pins		2.0000	st	
470	10600395	IC-socket 14 pins:fork-contact		1.0000	st	
370	10600530	Jack Break slimline S253-84		1.0000	st	
480	10201211	PCB D41-a (channel)		1.0000	st	
440	10300421	RK09 10KBx2cc Short version		3.0000	st	
450	10300420	RK09 10KBx2cc Short version		1.0000	st	
430	10300422	RK09 20KA Short version		1.0000	st	
20	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
160	10350912	Resistor 1k00 1% 1/4W		2.0000	st	
10	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
30	10350733	Resistor 2k2 5% 1/4W		2.0000	st	
40	10350735	Resistor 3k3 5% 1/4W		3.0000	st	
50	10350736	Resistor 3k9 5% 1/4W		4.0000	st	
60	10350737	Resistor 4k7 5% 1/4W		4.0000	st	
70	10350739	Resistor 6k8 5% 1/4W		4.0000	st	
170	10350846	Resistor 6k81 1% 1/4W		2.0000	st	
80	10350741	Resistor 10K 5% 1/4W		13.0000	st	
150	10350776	Resistor 10M0 5% 1/4W		2.0000	st	
180	10350848	Resistor 10k0 1% 1/4W		2.0000	st	
90	10350743	Resistor 15k 5% 1/4W		2.0000	st	
100	10350744	Resistor 18k 5% 1/4W		4.0000	st	
110	10350745	Resistor 22k 5% 1/4W		2.0000	st	
120	10350753	Resistor 100K 5% 1/4W		9.0000	st	
130	10350757	Resistor 220k 5% 1/4W		2.0000	st	
140	10350761	Resistor 470k 5% 1/4W		1.0000	st	
490	10600414	Shunt 2p (mini jumper)		4.0000	st	
400	10550414	Switch Alps 2pole mini NS		1.0000	st	
410	10550401	Switch Alps 4p-ns (4x om)		2.0000	st	
420	10550415	Switch Alps 4pole mini NS		1.0000	st	
390	10600238	XLR chas 3p fem X907-02		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
20	10600509	Header 20P 0° 2.54		16.0000	st	
10	10201219	PCB PS-DISa		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
280	10401253	Capacitor 10n R5.0 poly		24.0000	st	
250	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
300	10401257	Capacitor 33n R5.0 poly		8.0000	st	
260	10400219	Capacitor 33p R2.5 ker		9.0000	st	
270	10401241	Capacitor 100n/50V R5.0 ker		43.0000	st	
310	10401261	Capacitor 100n R5.0 poly		17.0000	st	
290	10401258	Capacitor 47n R5.0 poly		8.0000	st	
490	10250396	Crystal 12.0000 Mhz		1.0000	st	
10	10250342	Diode 1N4148 (signal)		24.0000	st	
510	10400287	Elco 47uF/ 25V radial R5.0		8.0000	st	
520	10400292	Elco 100uF/ 25V rad R5.0		13.0000	st	
500	10400284	Elco 10uF/50V radial R5.0		2.0000	st	
480	10250270	Fet BST76a/BS107 (Nch switch)		2.0000	st	
530	10600510	Header 2P Lock 0° 2.54		8.0000	st	
540	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
550	10600512	Header 4P Lock 0° 2.54		8.0000	st	
580	10600435	Header 10p 0° nobox R2.54		1.0000	st	
570	10600140	Header 34p 90° R2.54		1.0000	st	
330	10250025	IC 4051B (8 chann multiplexer)		2.0000	st	
370	10250031	IC 74HC148N (8/3 enc) FSC		1.0000	st	
380	10250046	IC 74HC259 8 bit adr l tch		1.0000	st	
390	10250033	IC 74HC573 dil versie		1.0000	st	
340	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
400	10250036	IC 80C552 (8-bit micro-comp tr)		1.0000	st	
360	10250039	IC BS62LV256PC-70 ram 28pins		1.0000	st	
410	10250069	IC DAC 0832LCN (8bits DAC)		1.0000	st	
420	10250316	IC LM339 (comparator)		2.0000	st	
350	10250027	IC MX27C512-70 XF1		1.0000	st	
440	10250043	IC THAT 4301 (VCA, RMS, 3xopamp)		8.0000	st	
450	10250304	IC TL072 CP TI DIL-8		1.0000	st	
460	10250305	IC TL074 CN TI (quad-opamp)		4.0000	st	
590	10600394	IC-socket 8 pins		1.0000	st	
600	10600395	IC-socket 14 pins:fork-contact		6.0000	st	
610	10600396	IC-socket 16 pins:fork-contact		4.0000	st	
620	10600398	IC-socket 20 pins:fork-contact		10.0000	st	
630	10600401	IC-socket 28 pins:fork-contact		2.0000	st	
640	10600403	IC-socket 68 pins:PLCC Socket		1.0000	st	
20	10250386	Led 3mm green SLR-03A210-020		1.0000	st	
30	10250387	Led 3mm red SLR-03A510-020		1.0000	st	
560	10201199	PCB Dynamics-b		1.0000	st	
430	10550001	Relay D1C121000 1xchnge minid		8.0000	st	
40	10350517	Resistor 0E 5% 1/4W		3.0000	st	
170	10350765	Resistor 1M0 5% 1/4W		1.0000	st	
110	10350729	Resistor 1k0 5% 1/4W		8.0000	st	
180	10350768	Resistor 2M2 5% 1/4W		8.0000	st	
190	10350905	Resistor 2k67 1% 1/4W		16.0000	st	
120	10350734	Resistor 2k7 5% 1/4W		8.0000	st	
50	10350704	Resistor 4E7 5% 1/4W		3.0000	st	
130	10350741	Resistor 10K 5% 1/4W		8.0000	st	
200	10350848	Resistor 10k0 1% 1/4W		8.0000	st	
220	10350856	Resistor 20k0 1% 1/4W		16.0000	st	
230	10350859	Resistor 24k3 1% 1/4W		18.0000	st	
240	10350883	Resistor 44k2 1% 1/4W		8.0000	st	
60	10350713	Resistor 47E 5% 1/4W		8.0000	st	
70	10350714	Resistor 56E 5% 1/4W		8.0000	st	
80	10350717	Resistor 100E 5% 1/4W		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
140	10350753	Resistor 100K 5% 1/4W		18.0000	st	
100	10350719	Resistor 150E 5% 1/4W		8.0000	st	
150	10350759	Resistor 330k 5% 1/4W		8.0000	st	
160	10350761	Resistor 470k 5% 1/4W		8.0000	st	
90	10350726	Resistor 560E 5% 1/4W		10.0000	st	
210	10350031	Resistor array 8x 10k 9p SIL		2.0000	st	
470	10250332	Transistor BC337/25-RR Tape!!!		8.0000	st	
320	10300203	Trimmer 100k H 25turn (T93YB)		8.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
260	10400213	Capacitor 10p R2.5 kerk		4.0000	st	
290	10400277	Capacitor 22n R5.0 poly		2.0000	st	
270	10400221	Capacitor 47p R2.5 ker		2.0000	st	
310	10401242	Capacitor 82n R5.0 poly		1.0000	st	
280	10401241	Capacitor 100n/50V R5.0 ker		11.0000	st	
320	10400270	Capacitor 470n R5.0 poly		1.0000	st	
300	10401258	Capacitor 47n R5.0 poly		1.0000	st	
430	10600180	Conn 2p Mains Terminal 5mm		1.0000	st	
10	10250342	Diode 1N4148 (signal)		8.0000	st	
410	10400292	Elco 100uF/ 25V rad R5.0		6.0000	st	
420	10400297	Elco 1000uF/40V axial(30x12,5)		2.0000	st	
550	10990693	FUSE 160mA slow 5x20mm		1.0000	st	
360	10990675	FuseHolder pcb + cap		1.0000	st	
340	10250320	IC 7815 T0220 Toshiba volt.reg		1.0000	st	
350	10250321	IC 7915 T0220 ONS (volt.reg)		1.0000	st	
370	10250316	IC LM339 (comparator)		1.0000	st	
380	10250043	IC THAT 4301 (VCA,RMS,3xopamp)		2.0000	st	
390	10250304	IC TL072 CP TI DIL-8		1.0000	st	
520	10600394	IC-socket 8 pins		1.0000	st	
530	10600395	IC-socket 14 pins:fork-contact		1.0000	st	
540	10600398	IC-socket 20 pins:fork-contact		2.0000	st	
440	10600432	Jack chassis break		4.0000	st	
510	10201162	PCB Compressor/Limiter ST-a		1.0000	st	
460	10300897	Potm.12 1x10kA (lin)		1.0000	st	
480	10300360	Potm.12 1x22kA (lin)		1.0000	st	
470	10300896	Potm.12 1x22kB (log)		1.0000	st	
490	10300887	Potm.12 1x47kB (log)		1.0000	st	
500	10300881	Potm.12 1x4M7B (log)		1.0000	st	
20	10250345	Rect. B80C1500 (round)		1.0000	st	
30	10350517	Resistor 0E 5% 1/4W		22.0000	st	
120	10350765	Resistor 1M0 5% 1/4W		2.0000	st	
150	10350829	Resistor 1k07 1% 1/4W		2.0000	st	
130	10350768	Resistor 2M2 5% 1/4W		2.0000	st	
160	10350905	Resistor 2k67 1% 1/4W		2.0000	st	
60	10350736	Resistor 3k9 5% 1/4W		1.0000	st	
70	10350737	Resistor 4k7 5% 1/4W		1.0000	st	
170	10350844	Resistor 4k75 1% 1/4W		1.0000	st	
80	10350739	Resistor 6k8 5% 1/4W		1.0000	st	
180	10350850	Resistor 11k0 1% 1/4W		1.0000	st	
190	10350856	Resistor 20k0 1% 1/4W		7.0000	st	
200	10350857	Resistor 20k5 1% 1/4W		4.0000	st	
210	10350863	Resistor 34k8 1% 1/4W		1.0000	st	
220	10350865	Resistor 39k2 1% 1/4W		1.0000	st	
40	10350713	Resistor 47E 5% 1/4W		6.0000	st	
50	10350714	Resistor 56E 5% 1/4W		1.0000	st	
230	10350870	Resistor 75k0 1% 1/4W		2.0000	st	
90	10350753	Resistor 100K 5% 1/4W		4.0000	st	
250	10350871	Resistor 100k 1% 1/4W		1.0000	st	
240	10350800	Resistor 215k 1% 1/4W		2.0000	st	
100	10350759	Resistor 330k 5% 1/4W		2.0000	st	
110	10350762	Resistor 560k 5% 1/4W		1.0000	st	
140	10350824	Resistor 681E 1% 1/4W		1.0000	st	
450	10550400	Switch Alps 2p-ns (2x om)		1.0000	st	
400	10950582	Transf.PCB 3VA/2x18v/2x115v		1.0000	st	
330	10300203	Trimmer 100k H 25turn (T93YB)		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
250	10401246	Capacitor 1n0 R5.0 poly		1.0000	st	
210	10400213	Capacitor 10p R2.5 kerk		52.0000	st	
220	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
230	10400223	Capacitor 68p R2.5 ker		3.0000	st	
240	10401241	Capacitor 100n/50V R5.0 ker		57.0000	st	
260	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
20	10250342	Diode 1N4148 (signal)		5.0000	st	
360	10400292	Elco 100uF/ 25V rad R5.0		51.0000	st	
370	10400290	Elco 220uF/ 25V radial R5.0		6.0000	st	
330	10250338	Fet J112 (N-channel switch)		2.0000	st	
340	10250017	Fet J175 (P-channel switch)		2.0000	st	
380	10600510	Header 2P Lock 0° 2.54		1.0000	st	
390	10600512	Header 4P Lock 0° 2.54		1.0000	st	
440	10600540	Header 10p 0° 2.54		1.0000	st	
450	10600520	Header 16p box 0° 2.54		1.0000	st	
410	10600456	Header 20p 90° R2.54		1.0000	st	
400	10600142	Header 34p 0° R2.54		3.0000	st	
420	10600140	Header 34p 90° R2.54		1.0000	st	
430	10600141	Header 64p 90° R2.54		2.0000	st	
270	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
280	10250275	IC LM1972N (M-DAC)		3.0000	st	
290	10250307	IC NE5532 AP TI (dual-opamp)		3.0000	st	
300	10250304	IC TL072 CP TI DIL-8		17.0000	st	
310	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
520	10600394	IC-socket 8 pins		20.0000	st	
530	10600395	IC-socket 14 pins:fork-contact		1.0000	st	
540	10600398	IC-socket 20 pins:fork-contact		3.0000	st	
510	10201183	PCB Cinemix-3b (master)		1.0000	st	
500	10300371	Potm.16 2x10kB (cn lin)		1.0000	st	
350	10550001	Relay D1C121000 1xchnge minid		1.0000	st	
40	10350701	Resistor 1E0 5% 1/4W		2.0000	st	
80	10350732	Resistor 1k8 5% 1/4W		4.0000	st	
50	10350703	Resistor 2E2 5% 1/4W		5.0000	st	
90	10350733	Resistor 2k2 5% 1/4W		7.0000	st	
100	10350736	Resistor 3k9 5% 1/4W		1.0000	st	
110	10350737	Resistor 4k7 5% 1/4W		5.0000	st	
60	10350705	Resistor 10E 5% 1/4W		6.0000	st	
120	10350741	Resistor 10K 5% 1/4W		1.0000	st	
170	10350776	Resistor 10M0 5% 1/4W		4.0000	st	
130	10350848	Resistor 10k0 1% 1/4W		92.0000	st	
180	10350853	Resistor 15k8 1% 1/4W		24.0000	st	
190	10350856	Resistor 20k0 1% 1/4W		6.0000	st	
200	10350859	Resistor 24k3 1% 1/4W		4.0000	st	
140	10350749	Resistor 47K 5% 1/4W		4.0000	st	
150	10350753	Resistor 100K 5% 1/4W		35.0000	st	
70	10350721	Resistor 220E 5% 1/4W		1.0000	st	
160	10350761	Resistor 470k 5% 1/4W		1.0000	st	
490	10550418	Switch ALPS 6xom mini NS		2.0000	st	
470	10550205	Switch Alps 2p mini MOMENT		2.0000	st	
460	10550414	Switch Alps 2pole mini NS		2.0000	st	
480	10550415	Switch Alps 4pole mini NS		9.0000	st	
320	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	
10	10250350	Zenerdiode 18V0/400mW		1.0000	st	
30	10250351	Zenerdiode 5V6/400mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
730	10700710	Bout M3x12 bolkop pozidrive		1.0000	st	
370	10401246	Capacitor 1n0 R5.0 poly		2.0000	st	
380	10401253	Capacitor 10n R5.0 poly		7.0000	st	
320	10400213	Capacitor 10p R2.5 kerk		14.0000	st	
330	10400217	Capacitor 22p R2.5 3mm		7.0000	st	
340	10400221	Capacitor 47p R2.5 ker		6.0000	st	
350	10400223	Capacitor 68p R2.5 ker		13.0000	st	
360	10401241	Capacitor 100n/50V R5.0 ker		53.0000	st	
410	10400270	Capacitor 470n R5.0 poly		1.0000	st	
400	10401261	Capacitor 100n R5.0 poly		2.0000	st	
390	10401258	Capacitor 47n R5.0 poly		1.0000	st	
20	10250342	Diode 1N4148 (signal)		12.0000	st	
540	10400280	Elco 2u2/50V radial R5.0		1.0000	st	
550	10400286	Elco 22uF/ 50V radial R5.0		2.0000	st	
560	10400292	Elco 100uF/ 25V rad R5.0		30.0000	st	
570	10400290	Elco 220uF/ 25V radial R5.0		13.0000	st	
530	10400279	Elco 1uF/100V radial R5.0		3.0000	st	
510	10250338	Fet J112 (N-channel switch)		1.0000	st	
520	10250017	Fet J175 (P-channel switch)		1.0000	st	
580	10600511	Header 3P Lock 0° R 2.54		2.0000	st	
590	10600512	Header 4P Lock 0° 2.54		7.0000	st	
610	10600456	Header 20p 90° R2.54		1.0000	st	
600	10600142	Header 34p 0° R2.54		3.0000	st	
620	10600140	Header 34p 90° R2.54		1.0000	st	
630	10600141	Header 64p 90° R2.54		2.0000	st	
430	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
460	10250179	IC DRV-134PA (SSM2142)		2.0000	st	
450	10250307	IC NE5532 AP TI (dual-opamp)		11.0000	st	
440	10250032	IC THAT 2180 BL08-U (VCA)		6.0000	st	
470	10250304	IC TL072 CP TI DIL-8		2.0000	st	
480	10250305	IC TL074 CN TI (quad-opamp)		2.0000	st	
700	10600394	IC-socket 8 pins		15.0000	st	
720	10600402	IC-socket 8 pins:SIL 2.54mm		6.0000	st	
710	10600395	IC-socket 14 pins:fork-contact		2.0000	st	
740	10700610	Moer M3		1.0000	st	
690	10201184	PCB Cinemix-4b (master)		1.0000	st	
680	10300372	Potm.16 1x20kB (cn lin)		2.0000	st	
110	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
270	10350827	Resistor 1k10 1% 1/4W		2.0000	st	
280	10350833	Resistor 1k50 1% 1/4W		6.0000	st	
120	10350732	Resistor 1k8 5% 1/4W		2.0000	st	
40	10350703	Resistor 2E2 5% 1/4W		5.0000	st	
130	10350736	Resistor 3k9 5% 1/4W		4.0000	st	
140	10350737	Resistor 4k7 5% 1/4W		4.0000	st	
150	10350738	Resistor 5k6 5% 1/4W		2.0000	st	
160	10350739	Resistor 6k8 5% 1/4W		6.0000	st	
170	10350741	Resistor 10K 5% 1/4W		8.0000	st	
260	10350776	Resistor 10M0 5% 1/4W		2.0000	st	
290	10350848	Resistor 10k0 1% 1/4W		77.0000	st	
180	10350742	Resistor 12k 5% 1/4W		2.0000	st	
190	10350743	Resistor 15k 5% 1/4W		3.0000	st	
300	10350853	Resistor 15k8 1% 1/4W		13.0000	st	
310	10350856	Resistor 20k0 1% 1/4W		14.0000	st	
200	10350746	Resistor 27k 5% 1/4W		3.0000	st	
50	10350713	Resistor 47E 5% 1/4W		36.0000	st	
210	10350749	Resistor 47K 5% 1/4W		11.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
60	10350714	Resistor 56E 5% 1/4W		1.0000	st	
70	10350717	Resistor 100E 5% 1/4W		1.0000	st	
220	10350753	Resistor 100K 5% 1/4W		33.0000	st	
80	10350719	Resistor 150E 5% 1/4W		3.0000	st	
230	10350755	Resistor 150k 5% 1/4W		2.0000	st	
90	10350720	Resistor 180E 5% 1/4W		1.0000	st	
100	10350721	Resistor 220E 5% 1/4W		4.0000	st	
240	10350757	Resistor 220k 5% 1/4W		1.0000	st	
250	10350761	Resistor 470k 5% 1/4W		3.0000	st	
670	10550418	Switch ALPS 6xom mini NS		1.0000	st	
650	10550395	Switch Alps 2p-ns MOMENT		1.0000	st	
640	10550414	Switch Alps 2pole mini NS		10.0000	st	
660	10550415	Switch Alps 4pole mini NS		1.0000	st	
490	10250335	Transistor 2SB737 (2SA1085E)		6.0000	st	
500	10250333	Transistor BC327/25-RR (TAPE)		3.0000	st	
420	10300166	Trimmer 20k 15turn (T18)		6.0000	st	
10	10250353	Zenerdiode 12V0/1.3W		2.0000	st	
30	10250340	Zenerdiode 2V4 / 400mW		6.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
210	10400213	Capacitor 10p R2.5 kerk		19.0000	st	
220	10400216	Capacitor 18p R2.5 ker		2.0000	st	
230	10400217	Capacitor 22p R2.5 3mm		1.0000	st	
250	10400223	Capacitor 68p R2.5 ker		6.0000	st	
260	10401242	Capacitor 82n R5.0 poly		5.0000	st	
240	10401241	Capacitor 100n/50V R5.0 ker		46.0000	st	
350	10400292	Elco 100uF/ 25V rad R5.0		29.0000	st	
360	10400290	Elco 220uF/ 25V radial R5.0		9.0000	st	
370	10600478	Header 4P 0° R 2.54		4.0000	st	
420	10600435	Header 10p 0° nobox R2.54		2.0000	st	
380	10600452	Header 10p 90° R2.54		1.0000	st	
390	10600456	Header 20p 90° R2.54		1.0000	st	
400	10600140	Header 34p 90° R2.54		2.0000	st	
410	10600141	Header 64p 90° R2.54		2.0000	st	
270	10250040	IC 40106B DIL		2.0000	st	
280	10250057	IC 4052 DIL-16		3.0000	st	
290	10250004	IC 4053B (HCF4053 BEY)DIL		2.0000	st	
300	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
310	10250275	IC LM1972N (M-DAC)		3.0000	st	
320	10250307	IC NE5532 AP TI (dual-opamp)		8.0000	st	
330	10250304	IC TL072 CP TI DIL-8		5.0000	st	
490	10600394	IC-socket 8 pins		13.0000	st	
500	10600395	IC-socket 14 pins:fork-contact		2.0000	st	
510	10600396	IC-socket 16 pins:fork-contact		5.0000	st	
520	10600398	IC-socket 20 pins:fork-contact		3.0000	st	
480	10201185	PCB Cinemix-5a (master)		1.0000	st	
460	10300378	Potm.16 1x10kA (log)		5.0000	st	
470	10300370	Potm.16 2x10kA (log)		1.0000	st	
40	10350701	Resistor 1E0 5% 1/4W		1.0000	st	
80	10350729	Resistor 1k0 5% 1/4W		1.0000	st	
90	10350732	Resistor 1k8 5% 1/4W		4.0000	st	
50	10350703	Resistor 2E2 5% 1/4W		5.0000	st	
100	10350733	Resistor 2k2 5% 1/4W		2.0000	st	
110	10350736	Resistor 3k9 5% 1/4W		2.0000	st	
120	10350737	Resistor 4k7 5% 1/4W		2.0000	st	
130	10350739	Resistor 6k8 5% 1/4W		5.0000	st	
140	10350740	Resistor 8k2 5% 1/4W		1.0000	st	
150	10350741	Resistor 10K 5% 1/4W		58.0000	st	
200	10350853	Resistor 15k8 1% 1/4W		11.0000	st	
60	10350713	Resistor 47E 5% 1/4W		14.0000	st	
160	10350749	Resistor 47K 5% 1/4W		5.0000	st	
170	10350753	Resistor 100K 5% 1/4W		8.0000	st	
180	10350761	Resistor 470k 5% 1/4W		8.0000	st	
70	10350726	Resistor 560E 5% 1/4W		5.0000	st	
190	10350763	Resistor 680k 5% 1/4W		5.0000	st	
530	10600414	Shunt 2p (mini jumper)		9.0000	st	
440	10550205	Switch Alps 2p mini MOMENT		5.0000	st	
430	10550414	Switch Alps 2pole mini NS		5.0000	st	
450	10550415	Switch Alps 4pole mini NS		5.0000	st	
340	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	
10	10250353	Zenerdiode 12V0/1.3W		1.0000	st	
20	10250350	Zenerdiode 18V0/400mW		1.0000	st	
30	10250351	Zenerdiode 5V6/400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
420	10950470	Battery 3V (lithium knoopcel)		1.0000	st	
430	10950471	Battery holder knoopcel		1.0000	st	
550	10700710	Bout M3x12 bolkop pozidrive		1.0000	st	
160	10401253	Capacitor 10n R5.0 poly		5.0000	st	
140	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
150	10401241	Capacitor 100n/50V R5.0 ker		27.0000	st	
360	10250396	Crystal 12.0000 Mhz		1.0000	st	
10	10250342	Diode 1N4148 (signal)		8.0000	st	
380	10400292	Elco 100uF/ 25V rad R5.0		4.0000	st	
370	10400284	Elco 10uF/50V radial R5.0		2.0000	st	
350	10250270	Fet BST76a/BS107 (Nch switch)		1.0000	st	
390	10600511	Header 3P Lock 0° R 2.54		2.0000	st	
400	10600478	Header 4P 0° R 2.54		1.0000	st	
410	10600512	Header 4P Lock 0° 2.54		3.0000	st	
460	10600520	Header 16p box 0° 2.54		3.0000	st	
450	10600509	Header 20P 0° 2.54		3.0000	st	
470	10600518	Header 20p box 0° 2.54		1.0000	st	
440	10600142	Header 34p 0° R2.54		2.0000	st	
170	10250040	IC 40106B DIL		1.0000	st	
180	10250025	IC 4051B (8 chann multiplexer)		3.0000	st	
190	10250057	IC 4052 DIL-16		1.0000	st	
200	10250004	IC 4053B (HCF4053 BEY)DIL		1.0000	st	
210	10250094	IC 4094 DIL		2.0000	st	
240	10250014	IC 4N27 (opto-coupler)		1.0000	st	
260	10250012	IC 74HC125 (quad bistab. buf)		1.0000	st	
270	10250034	IC 74HC132 DIL		1.0000	st	
280	10250048	IC 74HC138 (3to8 line decoder)		2.0000	st	
290	10250031	IC 74HC148N (8/3 enc) FSC		1.0000	st	
300	10250046	IC 74HC259 8 bit adr latched		1.0000	st	
310	10250033	IC 74HC573 dil versie		1.0000	st	
220	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
320	10250036	IC 80C552 (8-bit micro-comptr)		1.0000	st	
250	10250039	IC BS62LV256PC-70 ram 28pins		1.0000	st	
230	10250027	IC MX27C512-70 XF1		1.0000	st	
330	10250304	IC TL072 CP TI DIL-8		1.0000	st	
490	10600394	IC-socket 8 pins		1.0000	st	
500	10600395	IC-socket 14 pins:fork-contact		3.0000	st	
510	10600396	IC-socket 16 pins:fork-contact		11.0000	st	
520	10600398	IC-socket 20 pins:fork-contact		1.0000	st	
530	10600401	IC-socket 28 pins:fork-contact		2.0000	st	
540	10600403	IC-socket 68 pins:PLCC Socket		1.0000	st	
560	10700610	Moer M3		1.0000	st	
480	10201186	PCB Cinemix-6a (master CPU)		1.0000	st	
70	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
20	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
80	10350735	Resistor 3k3 5% 1/4W		2.0000	st	
100	10350741	Resistor 10K 5% 1/4W		22.0000	st	
30	10350709	Resistor 22E 5% 1/4W		1.0000	st	
110	10350745	Resistor 22k 5% 1/4W		1.0000	st	
120	10350749	Resistor 47K 5% 1/4W		2.0000	st	
130	10350753	Resistor 100K 5% 1/4W		3.0000	st	
40	10350721	Resistor 220E 5% 1/4W		3.0000	st	
50	10350725	Resistor 470E 5% 1/4W		9.0000	st	
60	10350726	Resistor 560E 5% 1/4W		9.0000	st	
90	10350728	Resistor 820E 5% 1/4W		1.0000	st	
340	10250333	Transistor BC327/25-RR (TAPE)		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
30	10401241	Capacitor 100n/50V R5.0 ker		8.0000	st	
70	10400292	Elco 100uF/ 25V rad R5.0		2.0000	st	
80	10600515	Header 4P Lock 90° 2.54		1.0000	st	
90	10600521	Header 16p box 90° 2.54		2.0000	st	
50	10250094	IC 4094 DIL		7.0000	st	
140	10600396	IC-socket 16 pins:fork-contact		7.0000	st	
60	10250407	Led Matrix 30mm TC12-11EWA		2.0000	st	
130	10201187	PCB Cinemix-7a (keyboard 1)		1.0000	st	
20	10350731	Resistor 1k5 5% 1/4W		1.0000	st	
10	10350726	Resistor 560E 5% 1/4W		45.0000	st	
110	10550206	Switch Zippy Black+Led moment		17.0000	st	
120	10550204	Switch Zippy Gray+Led moment		12.0000	st	
100	10550200	Switch Zippy Red+led moment		5.0000	st	
150	10550207	Switch Zippy+led (red) lock		2.0000	st	
40	10300200	Trimmer 20k Top H 25trn(T93YB)		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
90	10400221	Capacitor 47p R2.5 ker		2.0000	st	
110	10401242	Capacitor 82n R5.0 poly		2.0000	st	
100	10401241	Capacitor 100n/50V R5.0 ker		4.0000	st	
130	10400292	Elco 100uF/ 25V rad R5.0		1.0000	st	
140	10600456	Header 20p 90° R2.54		1.0000	st	
120	10250005	IC 4093B (s nand)		1.0000	st	
170	10600395	IC-socket 14 pins:fork-contact		1.0000	st	
180	10201188	PCB Cinemix-8a (keyboard 2)		1.0000	st	
10	10350517	Resistor 0E 5% 1/4W		4.0000	st	
20	10350703	Resistor 2E2 5% 1/4W		1.0000	st	
40	10350737	Resistor 4k7 5% 1/4W		3.0000	st	
50	10350741	Resistor 10K 5% 1/4W		2.0000	st	
60	10350749	Resistor 47K 5% 1/4W		2.0000	st	
70	10350753	Resistor 100K 5% 1/4W		3.0000	st	
30	10350726	Resistor 560E 5% 1/4W		4.0000	st	
80	10350763	Resistor 680k 5% 1/4W		2.0000	st	
160	10550205	Switch Alps 2p mini MOMENT		5.0000	st	
150	10550414	Switch Alps 2pole mini NS		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
140	10700917	Bout M5x50 tapbout blank		1.0000	st	
30	10401241	Capacitor 100n/50V R5.0 ker		5.0000	st	
100	10600180	Conn 2p Mains Terminal 5mm		5.0000	st	
70	10400292	Elco 100uF/ 25V rad R5.0		2.0000	st	
240	10400293	Elco 220uF/ 63V radial R5.0		1.0000	st	
230	10400308	Elco 680uF/100V axial		1.0000	st	
220	10400284	Elco 10uF/50V radial R5.0		1.0000	st	
80	10400299	Elco 4700uF/ 40V axial		2.0000	st	
90	10600478	Header 4P 0° R 2.54		2.0000	st	
120	10600452	Header 10p 90° R2.54		1.0000	st	
130	10600456	Header 20p 90° R2.54		1.0000	st	
270	10720662	Heatsink KL-169/SW T0-220		1.0000	st	
170	10720668	Heatsink SK64/37.5 SA-1xM3		2.0000	st	
40	10250320	IC 7815 T0220 Toshiba volt.reg		1.0000	st	
50	10250321	IC 7915 T0220 ONS (volt.reg)		1.0000	st	
280	10250020	IC TL783 (high volt.reg.)		1.0000	st	
110	10600530	Jack Break slimline S253-84		1.0000	st	
160	10700910	Kartelring M5 (buitenvertand)		2.0000	st	
180	10700909	Moer M5		1.0000	st	
190	10201218	PCB Airmate PS-1A		1.0000	st	
10	10250346	Rect. B80C1500 (rectang)		1.0000	st	
260	10250345	Rect. B80C1500 (round)		1.0000	st	
20	10350517	Resistor 0E 5% 1/4W		2.0000	st	
250	10350842	Resistor 3k01 1% 1/4W		1.0000	st	
210	10350716	Resistor 82E 5% 1/4W		1.0000	st	
150	10700707	Ring M5 diam 20mm dikte 1mm		1.0000	st	
200	10700616	Taptite M3x10 bolkopozidr/zw.		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
560	10205039	Bestuk Airmate-1p PCB		0.0000	st	
250	10401246	Capacitor 1n0 R5.0 poly		2.0000	st	
270	10401251	Capacitor 6n8 R5.0 poly		2.0000	st	
230	10400213	Capacitor 10p R2.5 kerk		8.0000	st	
240	10401241	Capacitor 100n/50V R5.0 ker		10.0000	st	
280	10401263	Capacitor 180n R5.0 poly		4.0000	st	
260	10401247	Capacitor 1n5 R5.0 poly		2.0000	st	
410	10600535	Conn Cinch 4xPCB gold pl bush		1.0000	st	
20	10250342	Diode 1N4148 (signal)		2.0000	st	
350	10400289	Elco 47uF/ 63V radial R5.0		2.0000	st	
360	10400292	Elco 100uF/ 25V rad R5.0		12.0000	st	
340	10400279	Elco 1uF/100V radial R5.0		3.0000	st	
550	10600510	Header 2P Lock 0° 2.54		1.0000	st	
370	10600505	Header 2p pin 0° sngl		2.0000	st	
380	10600511	Header 3P Lock 0° R 2.54		2.0000	st	
390	10600478	Header 4P 0° R 2.54		7.0000	st	
400	10600512	Header 4P Lock 0° 2.54		1.0000	st	
430	10600456	Header 20p 90° R2.54		1.0000	st	
290	10250306	IC NE5534 AP TI (single-opamp)		1.0000	st	
300	10250304	IC TL072 CP TI DIL-8		1.0000	st	
310	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
510	10600394	IC-socket 8 pins		2.0000	st	
520	10600395	IC-socket 14 pins:fork-contact		1.0000	st	
420	10600530	Jack Break slimline S253-84		1.0000	st	
530	10201220	PCB Airmate-1A Channel		1.0000	st	
490	10300421	RK09 100KBx2cc Short version		3.0000	st	
480	10300423	RK09 10KAx2 Short version		1.0000	st	
500	10300420	RK09 10KBx2cc Short version		1.0000	st	
330	10550001	Relay D1C121000 1xchnge minid		1.0000	st	
50	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
200	10350912	Resistor 1k00 1% 1/4W		2.0000	st	
30	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
60	10350733	Resistor 2k2 5% 1/4W		2.0000	st	
70	10350735	Resistor 3k3 5% 1/4W		3.0000	st	
80	10350736	Resistor 3k9 5% 1/4W		4.0000	st	
100	10350739	Resistor 6k8 5% 1/4W		4.0000	st	
210	10350846	Resistor 6k81 1% 1/4W		2.0000	st	
110	10350741	Resistor 10K 5% 1/4W		15.0000	st	
190	10350776	Resistor 10M0 5% 1/4W		2.0000	st	
220	10350848	Resistor 10k0 1% 1/4W		2.0000	st	
120	10350743	Resistor 15k 5% 1/4W		2.0000	st	
130	10350744	Resistor 18k 5% 1/4W		4.0000	st	
140	10350745	Resistor 22k 5% 1/4W		2.0000	st	
40	10350717	Resistor 100E 5% 1/4W		1.0000	st	
150	10350753	Resistor 100K 5% 1/4W		10.0000	st	
160	10350757	Resistor 220k 5% 1/4W		3.0000	st	
170	10350760	Resistor 390k 5% 1/4W		1.0000	st	
180	10350761	Resistor 470k 5% 1/4W		1.0000	st	
540	10600414	Shunt 2p (mini jumper)		6.0000	st	
450	10550414	Switch Alps 2pole mini NS		1.0000	st	
460	10550401	Switch Alps 4p-ns (4x om)		2.0000	st	
470	10550415	Switch Alps 4pole mini NS		1.0000	st	
320	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	
440	10600238	XLR chas 3p fem X907-02		1.0000	st	
10	10250350	Zenerdiode 18V0/400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
340	10400213	Capacitor 10p R2.5 kerk		7.0000	st	
350	10400217	Capacitor 22p R2.5 3mm		4.0000	st	
360	10401241	Capacitor 100n/50V R5.0 ker		21.0000	st	
370	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
490	10600535	Conn Cinch 4xPCB gold pl bush		1.0000	st	
10	10250342	Diode 1N4148 (signal)		4.0000	st	
460	10400280	Elco 2u2/50V radial R5.0		1.0000	st	
470	10400292	Elco 100uF/ 25V rad R5.0		17.0000	st	
450	10250338	Fet J112 (N-channel switch)		2.0000	st	
480	10600511	Header 3P Lock 0° R 2.54		2.0000	st	
500	10600452	Header 10p 90° R2.54		1.0000	st	
510	10600456	Header 20p 90° R2.54		1.0000	st	
390	10250325	IC 78L12 T092 SGS (volt.reg)		1.0000	st	
400	10250316	IC LM339 (comparator)		5.0000	st	
410	10250307	IC NE5532 AP TI (dual-opamp)		3.0000	st	
420	10250304	IC TL072 CP TI DIL-8		3.0000	st	
580	10600394	IC-socket 8 pins		6.0000	st	
590	10600395	IC-socket 14 pins:fork-contact		5.0000	st	
570	10201221	PCB Airmate-2p (Mstr-1)		1.0000	st	
560	10300423	RK09 10KAx2 Short version		2.0000	st	
70	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
320	10350912	Resistor 1k00 1% 1/4W		1.0000	st	
30	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
80	10350737	Resistor 4k7 5% 1/4W		2.0000	st	
90	10350741	Resistor 10K 5% 1/4W		15.0000	st	
170	10350776	Resistor 10M0 5% 1/4W		2.0000	st	
40	10350707	Resistor 15E 5% 1/4W		2.0000	st	
330	10350853	Resistor 15k8 1% 1/4W		8.0000	st	
180	10350909	Resistor 21E5 1% 1/4W		2.0000	st	
190	10350808	Resistor 33E2 1% 1/4W		1.0000	st	
50	10350713	Resistor 47E 5% 1/4W		6.0000	st	
200	10350807	Resistor 47E5 1% 1/4W		1.0000	st	
100	10350749	Resistor 47K 5% 1/4W		2.0000	st	
110	10350750	Resistor 56k 5% 1/4W		1.0000	st	
210	10350911	Resistor 64E9 1% 1/4W		1.0000	st	
220	10350809	Resistor 88E7 1% 1/4W		2.0000	st	
60	10350717	Resistor 100E 5% 1/4W		3.0000	st	
120	10350753	Resistor 100K 5% 1/4W		4.0000	st	
230	10350805	Resistor 133E 1% 1/4W		1.0000	st	
240	10350906	Resistor 158E 1% 1/4W		1.0000	st	
130	10350756	Resistor 180k 5% 1/4W		1.0000	st	
250	10350812	Resistor 205E 1% 1/4W		1.0000	st	
140	10350757	Resistor 220k 5% 1/4W		1.0000	st	
260	10350887	Resistor 249E 1% 1/4W		1.0000	st	
150	10350758	Resistor 270k 5% 1/4W		1.0000	st	
270	10350815	Resistor 316E 1% 1/4W		1.0000	st	
160	10350760	Resistor 390k 5% 1/4W		1.0000	st	
280	10350818	Resistor 392E 1% 1/4W		1.0000	st	
290	10350898	Resistor 499E 1% 1/4W		1.0000	st	
300	10350902	Resistor 634E 1% 1/4W		1.0000	st	
310	10350825	Resistor 768E 1% 1/4W		1.0000	st	
530	10550414	Switch Alps 2pole mini NS		1.0000	st	
540	10550415	Switch Alps 4pole mini NS		2.0000	st	
430	10250333	Transistor BC327/25-RR (TAPE)		2.0000	st	
440	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	
380	10300166	Trimmer 20k 15turn (T18)		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
520	10600798	XLR chass male pl X906-02		1.0000	st	
20	10250340	Zenerdiode 2V4 / 400mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
1110	10205003	Bestuk Orion-LCR PCB		1.0000	st	
690	10400236	Capacitor 1n R2.5 ker		2.0000	st	
460	10401250	Capacitor 4n7 R5.0 poly		1.0000	st	
470	10400209	Capacitor 4p7 R2.5 ker		6.0000	st	
500	10401251	Capacitor 6n8 R5.0 poly		4.0000	st	
510	10400211	Capacitor 6p8 R2.5 ker		1.0000	st	
130	10400213	Capacitor 10p R2.5 kerk		5.0000	st	
150	10400216	Capacitor 18p R2.5 ker		8.0000	st	
180	10400277	Capacitor 22n R5.0 poly		1.0000	st	
210	10400221	Capacitor 47p R2.5 ker		2.0000	st	
240	10401260	Capacitor 68n R5.0 poly		1.0000	st	
250	10401242	Capacitor 82n R5.0 poly		2.0000	st	
10	10401241	Capacitor 100n/50V R5.0 ker		35.0000	st	
670	10400229	Capacitor 220p R2.5 ker		1.0000	st	
260	10401261	Capacitor 100n R5.0 poly		2.0000	st	
400	10401247	Capacitor 1n5 R5.0 poly		1.0000	st	
20	10401268	Capacitor 1uF R5.0 poly		2.0000	st	
200	10401258	Capacitor 47n R5.0 poly		5.0000	st	
30	10400280	Elco 2u2/50V radial R5.0		6.0000	st	
280	10400292	Elco 100uF/ 25V rad R5.0		27.0000	st	
290	10400302	Elco 100uF/ 63V radial R5.0		3.0000	st	
440	10400290	Elco 220uF/ 25V radial R5.0		5.0000	st	
300	10400303	Elco 1000uF/ 10V radial R5.0		1.0000	st	
720	10400284	Elco 10uF/50V radial R5.0		3.0000	st	
710	10400279	Elco 1uF/100V radial R5.0		2.0000	st	
540	10250338	Fet J112 (N-channel switch)		2.0000	st	
550	10250017	Fet J175 (P-channel switch)		2.0000	st	
40	10600510	Header 2P Lock 0° 2.54		2.0000	st	
790	10600505	Header 2p pin 0° sngl		5.0000	st	
50	10600511	Header 3P Lock 0° R 2.54		4.0000	st	
70	10600478	Header 4P 0° R 2.54		6.0000	st	
60	10600512	Header 4P Lock 0° 2.54		1.0000	st	
80	10600513	Header 5P Lock 0° 2.54		1.0000	st	
780	10600438	Header 16p 0° nobox R2.54		2.0000	st	
570	10600456	Header 20p 90° R2.54		2.0000	st	
580	10600140	Header 34p 90° R2.54		2.0000	st	
590	10600141	Header 64p 90° R2.54		1.0000	st	
700	10250005	IC 4093B (s nand)		1.0000	st	
560	10250317	IC 78L05 T092 SGS (volt.reg.)		1.0000	st	
600	10250307	IC NE5532 AP TI (dual-opamp)		5.0000	st	
640	10250184	IC SSM2019BN or INA217AIP		1.0000	st	
1100	10250184	IC SSM2019BN or INA217AIP		1.0000	st	
530	10250032	IC THAT 2180 BL08-U (VCA)		1.0000	st	
650	10250304	IC TL072 CP TI DIL-8		6.0000	st	
660	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
750	10600394	IC-socket 8 pins		12.0000	st	
740	10600402	IC-socket 8 pins:SIL 2.54mm		1.0000	st	
760	10600395	IC-socket 14 pins:fork-contact		2.0000	st	
730	10200304	PCB Orion-LCR-c (inline auto)		1.0000	st	
330	10201365	PCB RK16>RK97		6.0000	st	
430	10300374	Potm.16 1x20kB/1x10kRD (gain)		1.0000	st	
120	10300371	Potm.16 2x10kB (cn lin)		1.0000	st	
360	10300371	Potm.16 2x10kB (cn lin)		1.0000	st	
220	10300373	Potm.16 2x50kA (con)		3.0000	st	
320	10300401	Potm.97 100kCX2/10kB CC		6.0000	st	
350	10300402	Potm.97 10kBx2 CC/10kA		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
800	10350517	Resistor 0E 5% 1/4W		1.0000	st	
110	10351765	Resistor 1M0 5% 1/8W		1.0000	st	
810	10350729	Resistor 1k0 5% 1/4W		4.0000	st	
370	10351729	Resistor 1k0 5% 1/8W		1.0000	st	
390	10350827	Resistor 1k10 1% 1/4W		1.0000	st	
830	10350832	Resistor 1k37 1% 1/4W		1.0000	st	
820	10350731	Resistor 1k5 5% 1/4W		4.0000	st	
380	10350732	Resistor 1k8 5% 1/4W		4.0000	st	
840	10350835	Resistor 2k00 1% 1/4W		1.0000	st	
850	10350733	Resistor 2k2 5% 1/4W		4.0000	st	
860	10350905	Resistor 2k67 1% 1/4W		1.0000	st	
870	10350736	Resistor 3k9 5% 1/4W		1.0000	st	
880	10351736	Resistor 3k9 5% 1/8W		9.0000	st	
450	10351737	Resistor 4k7 5% 1/8W		11.0000	st	
900	10351737	Resistor 4k7 5% 1/8W		3.0000	st	
490	10350739	Resistor 6k8 5% 1/4W		4.0000	st	
910	10350846	Resistor 6k81 1% 1/4W		2.0000	st	
920	10350740	Resistor 8k2 5% 1/4W		1.0000	st	
930	10350520	Resistor 8k25 1% 1/4W		1.0000	st	
940	10350705	Resistor 10E 5% 1/4W		3.0000	st	
950	10350776	Resistor 10M0 5% 1/4W		4.0000	st	
100	10351741	Resistor 10k 1% 1/8W		33.0000	st	
340	10350848	Resistor 10k0 1% 1/4W		1.0000	st	
960	10350742	Resistor 12k 5% 1/4W		3.0000	st	
140	10351743	Resistor 15k 5% 1/8W		12.0000	st	
970	10350744	Resistor 18k 5% 1/4W		1.0000	st	
410	10350856	Resistor 20k0 1% 1/4W		2.0000	st	
170	10351745	Resistor 22k 5% 1/8W		10.0000	st	
980	10350711	Resistor 33E 5% 1/4W		1.0000	st	
990	10350747	Resistor 33k 5% 1/4W		1.0000	st	
190	10350862	Resistor 33k2 1% 1/4W		3.0000	st	
1000	10350713	Resistor 47E 5% 1/4W		7.0000	st	
1010	10350749	Resistor 47K 5% 1/4W		3.0000	st	
1020	10351749	Resistor 47k 5% 1/8W		13.0000	st	
230	10350714	Resistor 56E 5% 1/4W		1.0000	st	
890	10351714	Resistor 56E 5% 1/8W		1.0000	st	
1030	10351751	Resistor 68k 5% 1/8W		1.0000	st	
1040	10350753	Resistor 100K 5% 1/4W		3.0000	st	
270	10351753	Resistor 100k 5% 1/8W		27.0000	st	
1050	10350757	Resistor 220k 5% 1/4W		2.0000	st	
1060	10350725	Resistor 470E 5% 1/4W		1.0000	st	
680	10351761	Resistor 470k 5% 1/8W		1.0000	st	
1070	10351726	Resistor 560E 5% 1/8W		2.0000	st	
1080	10350727	Resistor 680E 5% 1/4W		1.0000	st	
1090	10350763	Resistor 680k 5% 1/4W		2.0000	st	
770	10600414	Shunt 2p (mini jumper)		10.0000	st	
620	10550205	Switch Alps 2p mini MOMENT		3.0000	st	
610	10550414	Switch Alps 2pole mini NS		19.0000	st	
630	10550415	Switch Alps 4pole mini NS		11.0000	st	
520	10250332	Transistor BC337/25-RR Tape!!!		3.0000	st	
310	10300203	Trimmer 100k H 25turn (T93YB)		1.0000	st	
420	10300200	Trimmer 20k Top H 25trn(T93YB)		1.0000	st	
160	10250350	Zenerdiode 18V0/400mW		2.0000	st	
480	10250351	Zenerdiode 5V6/400mW		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
140	10400213	Capacitor 10p R2.5 kerk		2.0000	st	
200	10400217	Capacitor 22p R2.5 3mm		6.0000	st	
230	10400221	Capacitor 47p R2.5 ker		6.0000	st	
50	10401241	Capacitor 100n/50V R5.0 ker		18.0000	st	
260	10400225	Capacitor 100pf R2.5 ker		1.0000	st	
70	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
510	10600040	Conn sub-D9 fem F09 HMX Airmix		1.0000	st	
380	10250342	Diode 1N4148 (signal)		3.0000	st	
340	10400292	Elco 100uF/ 25V rad R5.0		47.0000	st	
330	10400279	Elco 1uF/100V radial R5.0		2.0000	st	
430	10250338	Fet J112 (N-channel switch)		2.0000	st	
440	10250017	Fet J175 (P-channel switch)		2.0000	st	
80	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
110	10600478	Header 4P 0° R 2.54		5.0000	st	
90	10600512	Header 4P Lock 0° 2.54		2.0000	st	
540	10600486	Header 6p 0° R3.96		1.0000	st	
460	10600140	Header 34p 90° R2.54		1.0000	st	
470	10600141	Header 64p 90° R2.54		1.0000	st	
310	10250355	IC 4013B (GEEN MOTOROLA !!!!!)		1.0000	st	
320	10250004	IC 4053B (HCF4053 BEY)DIL		2.0000	st	
480	10250307	IC NE5532 AP TI (dual-opamp)		2.0000	st	
520	10250304	IC TL072 CP TI DIL-8		2.0000	st	
530	10250305	IC TL074 CN TI (quad-opamp)		3.0000	st	
20	10600394	IC-socket 8 pins		4.0000	st	
30	10600395	IC-socket 14 pins:fork-contact		4.0000	st	
40	10600396	IC-socket 16 pins:fork-contact		2.0000	st	
450	10600530	Jack Break slimline S253-84		4.0000	st	
10	10201138	PCB Airmix-8a (master)		1.0000	st	
130	10300370	Potm.16 2x10kA (log)		3.0000	st	
60	10350517	Resistor 0E 5% 1/4W		3.0000	st	
360	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
370	10350732	Resistor 1k8 5% 1/4W		4.0000	st	
390	10350704	Resistor 4E7 5% 1/4W		7.0000	st	
400	10350737	Resistor 4k7 5% 1/4W		13.0000	st	
410	10350739	Resistor 6k8 5% 1/4W		2.0000	st	
120	10350741	Resistor 10K 5% 1/4W		18.0000	st	
350	10350776	Resistor 10M0 5% 1/4W		5.0000	st	
150	10350743	Resistor 15k 5% 1/4W		2.0000	st	
190	10350745	Resistor 22k 5% 1/4W		6.0000	st	
210	10350747	Resistor 33k 5% 1/4W		1.0000	st	
220	10350713	Resistor 47E 5% 1/4W		8.0000	st	
240	10350750	Resistor 56k 5% 1/4W		1.0000	st	
250	10350753	Resistor 100K 5% 1/4W		37.0000	st	
270	10350723	Resistor 330E 5% 1/4W		2.0000	st	
280	10350761	Resistor 470k 5% 1/4W		1.0000	st	
290	10350726	Resistor 560E 5% 1/4W		2.0000	st	
300	10350763	Resistor 680k 5% 1/4W		2.0000	st	
100	10600414	Shunt 2p (mini jumper)		5.0000	st	
490	10550400	Switch Alps 2p-ns (2x om)		4.0000	st	
500	10550401	Switch Alps 4p-ns (4x om)		2.0000	st	
420	10250333	Transistor BC327/25-RR (TAPE)		1.0000	st	
160	10250359	Zenerdiode 15V0/400mW		1.0000	st	
170	10250350	Zenerdiode 18V0/400mW		1.0000	st	
180	10250365	Zenerdiode 22V/400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
580	10401246	Capacitor 1n0 R5.0 poly		2.0000	st	
590	10401248	Capacitor 2n2 R5.0 poly		4.0000	st	
500	10400205	Capacitor 2p2 R2.5 ker		4.0000	st	
600	10401249	Capacitor 3n3 R5.0 poly		1.0000	st	
610	10401250	Capacitor 4n7 R5.0 poly		2.0000	st	
510	10400209	Capacitor 4p7 R2.5 ker		10.0000	st	
520	10400213	Capacitor 10p R2.5 kerk		22.0000	st	
530	10400216	Capacitor 18p R2.5 ker		6.0000	st	
620	10400277	Capacitor 22n R5.0 poly		4.0000	st	
630	10401257	Capacitor 33n R5.0 poly		4.0000	st	
540	10400221	Capacitor 47p R2.5 ker		2.0000	st	
560	10401241	Capacitor 100n/50V R5.0 ker		134.0000	st	
550	10400225	Capacitor 100pf R2.5 ker		2.0000	st	
670	10400270	Capacitor 470n R5.0 poly		2.0000	st	
650	10401261	Capacitor 100n R5.0 poly		4.0000	st	
570	10401268	Capacitor 1uF R5.0 poly		2.0000	st	
660	10401265	Capacitor 330n R5.0 poly		2.0000	st	
640	10401258	Capacitor 47n R5.0 poly		6.0000	st	
20	10250342	Diode 1N4148 (signal)		6.0000	st	
680	10400280	Elco 2u2/50V radial R5.0		6.0000	st	
700	10400292	Elco 100uF/ 25V rad R5.0		8.0000	st	
710	10400302	Elco 100uF/ 63V radial R5.0		1.0000	st	
730	10400290	Elco 220uF/ 25V radial R5.0		5.0000	st	
740	10400293	Elco 220uF/ 63V radial R5.0		2.0000	st	
720	10400243	Elco 220uF/16V rad R5 6x12mm		50.0000	st	
750	10400303	Elco 1000uF/ 10V radial R5.0		1.0000	st	
690	10400284	Elco 10uF/50V radial R5.0		2.0000	st	
770	10250338	Fet J112 (N-channel switch)		2.0000	st	
780	10250017	Fet J175 (P-channel switch)		2.0000	st	
970	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
990	10600512	Header 4P Lock 0° 2.54		6.0000	st	
1000	10600513	Header 5P Lock 0° 2.54		1.0000	st	
1010	10600435	Header 10p 0° nobox R2.54		2.0000	st	
1030	10600142	Header 34p 0° R2.54		1.0000	st	
1020	10600140	Header 34p 90° R2.54		2.0000	st	
1040	10600141	Header 64p 90° R2.54		2.0000	st	
860	10250025	IC 4051B (8 chann multiplexer)		5.0000	st	
870	10250057	IC 4052 DIL-16		3.0000	st	
880	10250004	IC 4053B (HCF4053 BEY)DIL		24.0000	st	
890	10250094	IC 4094 DIL		11.0000	st	
900	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
950	10250179	IC DRV-134PA (SSM2142)		6.0000	st	
930	10250307	IC NE5532 AP TI (dual-opamp)		3.0000	st	
910	10250049	IC SN74HC139 (2to4line dec)		4.0000	st	
940	10250184	IC SSM2019BN or INA217AIP		1.0000	st	
920	10250032	IC THAT 2180 BL08-U (VCA)		2.0000	st	
960	10250304	IC TL072 CP TI DIL-8		26.0000	st	
830	10600394	IC-socket 8 pins		33.0000	st	
850	10600402	IC-socket 8 pins:SIL 2.54mm		2.0000	st	
840	10600396	IC-socket 16 pins:fork-contact		52.0000	st	
10	10201300	PCB Octagon-10B (channel)		1.0000	st	
1120	10300413	Pot RK 50kB100kC100kC-50kB10kB		8.0000	st	
1080	10300414	Pot RK09 50kB/10kA/10kA		4.0000	st	
1090	10300415	Pot RK09 50kB/10kB/10kB		2.0000	st	
1100	10300416	Pot RK09 50kB10kB10kB10kM10kN		1.0000	st	
1130	10300417	PotRK 50kB100kC100kC-x2		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
1110	10300410	PotRK09 50kB20kB-50kB20kB10kRD		1.0000	st	
60	10350517	Resistor 0E 5% 1/4W		1.0000	st	
70	10350701	Resistor 1E0 5% 1/4W		1.0000	st	
80	10350729	Resistor 1k0 5% 1/4W		15.0000	st	
370	10350829	Resistor 1k07 1% 1/4W		4.0000	st	
380	10350827	Resistor 1k10 1% 1/4W		2.0000	st	
390	10350832	Resistor 1k37 1% 1/4W		2.0000	st	
90	10350731	Resistor 1k5 5% 1/4W		4.0000	st	
100	10350732	Resistor 1k8 5% 1/4W		4.0000	st	
280	10350703	Resistor 2E2 5% 1/4W		6.0000	st	
110	10350733	Resistor 2k2 5% 1/4W		9.0000	st	
400	10350838	Resistor 2k37 1% 1/4W		2.0000	st	
120	10350734	Resistor 2k7 5% 1/4W		2.0000	st	
130	10350735	Resistor 3k3 5% 1/4W		4.0000	st	
140	10350736	Resistor 3k9 5% 1/4W		6.0000	st	
290	10350704	Resistor 4E7 5% 1/4W		1.0000	st	
150	10350737	Resistor 4k7 5% 1/4W		30.0000	st	
410	10350844	Resistor 4k75 1% 1/4W		2.0000	st	
160	10350739	Resistor 6k8 5% 1/4W		4.0000	st	
420	10350846	Resistor 6k81 1% 1/4W		2.0000	st	
430	10350878	Resistor 9k09 1% 1/4W		2.0000	st	
170	10350741	Resistor 10K 5% 1/4W		36.0000	st	
270	10350776	Resistor 10M0 5% 1/4W		4.0000	st	
440	10350848	Resistor 10k0 1% 1/4W		91.0000	st	
450	10350850	Resistor 11k0 1% 1/4W		4.0000	st	
180	10350743	Resistor 15k 5% 1/4W		1.0000	st	
460	10350853	Resistor 15k8 1% 1/4W		8.0000	st	
190	10350744	Resistor 18k 5% 1/4W		5.0000	st	
470	10350856	Resistor 20k0 1% 1/4W		15.0000	st	
200	10350746	Resistor 27k 5% 1/4W		2.0000	st	
480	10350882	Resistor 30k1 1% 1/4W		4.0000	st	
300	10350711	Resistor 33E 5% 1/4W		1.0000	st	
310	10350713	Resistor 47E 5% 1/4W		8.0000	st	
210	10350749	Resistor 47K 5% 1/4W		4.0000	st	
320	10350714	Resistor 56E 5% 1/4W		2.0000	st	
330	10350717	Resistor 100E 5% 1/4W		2.0000	st	
220	10350753	Resistor 100K 5% 1/4W		45.0000	st	
230	10350757	Resistor 220k 5% 1/4W		4.0000	st	
240	10350758	Resistor 270k 5% 1/4W		2.0000	st	
340	10350723	Resistor 330E 5% 1/4W		8.0000	st	
250	10350759	Resistor 330k 5% 1/4W		2.0000	st	
350	10350725	Resistor 470E 5% 1/4W		5.0000	st	
260	10350761	Resistor 470k 5% 1/4W		6.0000	st	
360	10350727	Resistor 680E 5% 1/4W		11.0000	st	
490	10350029	Resistor array 680E sil8 ncom		23.0000	st	
980	10600414	Shunt 2p (mini jumper)		2.0000	st	
1050	10550205	Switch Alps 2p mini MOMENT		13.0000	st	
1060	10550414	Switch Alps 2pole mini NS		6.0000	st	
1070	10550415	Switch Alps 4pole mini NS		3.0000	st	
760	10250332	Transistor BC337/25-RR Tape!!!		16.0000	st	
820	10300203	Trimmer 100k H 25turn (T93YB)		4.0000	st	
790	10300206	Trimmer 10k 15turn (T18)		1.0000	st	
800	10300200	Trimmer 20k Top H 25trn(T93YB)		1.0000	st	
810	10300168	Trimmer 50k 15turn (T18)		2.0000	st	
30	10250353	Zenerdiode 12V0/1.3W		1.0000	st	
50	10250350	Zenerdiode 18V0/400mW		4.0000	st	
40	10250351	Zenerdiode 5V6/400mW		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
380	10401253	Capacitor 10n R5.0 poly		4.0000	st	
310	10400213	Capacitor 10p R2.5 kerk		12.0000	st	
320	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
330	10400221	Capacitor 47p R2.5 ker		8.0000	st	
340	10400223	Capacitor 68p R2.5 ker		1.0000	st	
360	10401241	Capacitor 100n/50V R5.0 ker		79.0000	st	
350	10400225	Capacitor 100pf R2.5 ker		2.0000	st	
400	10400262	Capacitor 150n R7.5 poly		2.0000	st	
410	10400269	Capacitor 220n R5.0 poly		8.0000	st	
390	10401261	Capacitor 100n R5.0 poly		2.0000	st	
370	10401268	Capacitor 1uF R5.0 poly		2.0000	st	
20	10250342	Diode 1N4148 (signal)		12.0000	st	
420	10400292	Elco 100uF/ 25V rad R5.0		4.0000	st	
440	10400290	Elco 220uF/ 25V radial R5.0		5.0000	st	
430	10400243	Elco 220uF/16V rad R5 6x12mm		40.0000	st	
460	10250017	Fet J175 (P-channel switch)		2.0000	st	
640	10600502	Header 2p Lock 90° 2.54		2.0000	st	
630	10600478	Header 4P 0° R 2.54		2.0000	st	
650	10600515	Header 4P Lock 90° 2.54		3.0000	st	
660	10600438	Header 16p 0° nobox R2.54		6.0000	st	
670	10600141	Header 64p 90° R2.54		3.0000	st	
580	10250040	IC 40106B DIL		1.0000	st	
520	10250025	IC 4051B (8 chann multiplexer)		2.0000	st	
530	10250057	IC 4052 DIL-16		2.0000	st	
540	10250004	IC 4053B (HCF4053 BEY)DIL		30.0000	st	
560	10250094	IC 4094 DIL		12.0000	st	
570	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
550	10250059	IC CD4069 6 inv. buffer		1.0000	st	
590	10250058	IC L272 MB DIL-8		2.0000	st	
600	10250307	IC NE5532 AP TI (dual-opamp)		8.0000	st	
610	10250304	IC TL072 CP TI DIL-8		2.0000	st	
620	10250305	IC TL074 CN TI (quad-opamp)		2.0000	st	
490	10600394	IC-socket 8 pins		10.0000	st	
500	10600395	IC-socket 14 pins:fork-contact		4.0000	st	
510	10600396	IC-socket 16 pins:fork-contact		46.0000	st	
10	10201311	PCB Octagon-11B (subchannel)		1.0000	st	
700	10300411	Pot RK09 50kB/50kA-50kB/50kA		4.0000	st	
690	10300412	Pot RK09 50kB10kB10kB-50kB50kA		2.0000	st	
50	10350517	Resistor 0E 5% 1/4W		1.0000	st	
210	10350701	Resistor 1E0 5% 1/4W		11.0000	st	
190	10350765	Resistor 1M0 5% 1/4W		6.0000	st	
60	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
70	10350732	Resistor 1k8 5% 1/4W		2.0000	st	
220	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
250	10350835	Resistor 2k00 1% 1/4W		4.0000	st	
80	10350733	Resistor 2k2 5% 1/4W		3.0000	st	
90	10350734	Resistor 2k7 5% 1/4W		4.0000	st	
100	10350737	Resistor 4k7 5% 1/4W		4.0000	st	
230	10350705	Resistor 10E 5% 1/4W		1.0000	st	
110	10350741	Resistor 10K 5% 1/4W		4.0000	st	
260	10350848	Resistor 10k0 1% 1/4W		109.0000	st	
120	10350744	Resistor 18k 5% 1/4W		2.0000	st	
270	10350856	Resistor 20k0 1% 1/4W		14.0000	st	
280	10350858	Resistor 22k1 1% 1/4W		2.0000	st	
130	10350747	Resistor 33k 5% 1/4W		2.0000	st	
140	10350748	Resistor 39k 5% 1/4W		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
150	10350749	Resistor 47K 5% 1/4W		4.0000	st	
290	10350866	Resistor 47k5 1% 1/4W		4.0000	st	
160	10350753	Resistor 100K 5% 1/4W		10.0000	st	
170	10350761	Resistor 470k 5% 1/4W		4.0000	st	
240	10350727	Resistor 680E 5% 1/4W		2.0000	st	
180	10350763	Resistor 680k 5% 1/4W		2.0000	st	
200	10350004	Resistor NTC WTF4k7		2.0000	st	
300	10350029	Resistor array 680E sil8 ncom		8.0000	st	
680	10550414	Switch Alps 2pole mini NS		2.0000	st	
450	10250332	Transistor BC337/25-RR Tape!!!		2.0000	st	
480	10300519	Trimmer 100k 15turn (T18)		2.0000	st	
470	10300166	Trimmer 20k 15turn (T18)		1.0000	st	
30	10250353	Zenerdiode 12V0/1.3W		1.0000	st	
40	10250340	Zenerdiode 2V4 / 400mW		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
30	10600435	Header 10p 0° nobox R2.54		1.0000	st	
20	10250121	Led Display 9mm c.anode (red)		1.0000	st	
10	10201312	PCB Octagon-12p (displ-chn)		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
310	10401253	Capacitor 10n R5.0 poly		32.0000	st	
250	10400213	Capacitor 10p R2.5 kerk		1.0000	st	
260	10400216	Capacitor 18p R2.5 ker		1.0000	st	
270	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
280	10400223	Capacitor 68p R2.5 ker		1.0000	st	
300	10401241	Capacitor 100n/50V R5.0 ker		51.0000	st	
290	10400229	Capacitor 220p R2.5 ker		1.0000	st	
380	10250398	Crystal 11.0592 Mhz		1.0000	st	
20	10250342	Diode 1N4148 (signal)		13.0000	st	
330	10400292	Elco 100uF/ 25V rad R5.0		3.0000	st	
350	10400290	Elco 220uF/ 25V radial R5.0		4.0000	st	
340	10400243	Elco 220uF/16V rad R5 6x12mm		1.0000	st	
320	10400284	Elco 10uF/50V radial R5.0		3.0000	st	
370	10250270	Fet BST76a/BS107 (Nch switch)		1.0000	st	
570	10600478	Header 4P 0° R 2.54		2.0000	st	
590	10600512	Header 4P Lock 0° 2.54		9.0000	st	
630	10600506	Header 10P box 0° 2.54		1.0000	st	
600	10600435	Header 10p 0° nobox R2.54		1.0000	st	
620	10600142	Header 34p 0° R2.54		8.0000	st	
610	10600140	Header 34p 90° R2.54		1.0000	st	
460	10250025	IC 4051B (8 chann multiplexer)		4.0000	st	
510	10250048	IC 74HC138 (3to8 line decoder)		5.0000	st	
500	10250035	IC 74HC14 DIL-14		2.0000	st	
520	10250033	IC 74HC573 dil versie		3.0000	st	
470	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
530	10250036	IC 80C552 (8-bit micro-comptr)		1.0000	st	
490	10250039	IC BS62LV256PC-70 ram 28pins		1.0000	st	
540	10250069	IC DAC 0832LCN (8bits DAC)		1.0000	st	
480	10250027	IC MX27C512-70 XF1		1.0000	st	
550	10250304	IC TL072 CP TI DIL-8		2.0000	st	
560	10250305	IC TL074 CN TI (quad-opamp)		9.0000	st	
400	10600394	IC-socket 8 pins		2.0000	st	
410	10600395	IC-socket 14 pins:fork-contact		11.0000	st	
420	10600396	IC-socket 16 pins:fork-contact		9.0000	st	
430	10600398	IC-socket 20 pins:fork-contact		4.0000	st	
440	10600401	IC-socket 28 pins:fork-contact		2.0000	st	
450	10600403	IC-socket 68 pins:PLCC Socket		1.0000	st	
10	10201313	PCB Octagon-13a (MUX/CPU)		1.0000	st	
50	10350517	Resistor 0E 5% 1/4W		2.0000	st	
110	10350701	Resistor 1E0 5% 1/4W		1.0000	st	
100	10350765	Resistor 1M0 5% 1/4W		7.0000	st	
60	10350729	Resistor 1k0 5% 1/4W		1.0000	st	
120	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
70	10350733	Resistor 2k2 5% 1/4W		2.0000	st	
180	10350837	Resistor 2k21 1% 1/4W		1.0000	st	
130	10350705	Resistor 10E 5% 1/4W		1.0000	st	
190	10350848	Resistor 10k0 1% 1/4W		6.0000	st	
200	10350851	Resistor 12k0 1% 1/4W		1.0000	st	
210	10350869	Resistor 14k0 1% 1/4W		1.0000	st	
220	10350852	Resistor 15k0 1% 1/4W		2.0000	st	
230	10350880	Resistor 18k7 1% 1/4W		1.0000	st	
240	10350865	Resistor 39k2 1% 1/4W		1.0000	st	
140	10350713	Resistor 47E 5% 1/4W		8.0000	st	
150	10350717	Resistor 100E 5% 1/4W		1.0000	st	
80	10350760	Resistor 390k 5% 1/4W		1.0000	st	
90	10350761	Resistor 470k 5% 1/4W		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
170	10350728	Resistor 820E 5% 1/4W		1.0000	st	
160	10350029	Resistor array 680E sil8 ncom		10.0000	st	
580	10600414	Shunt 2p (mini jumper)		1.0000	st	
360	10250333	Transistor BC327/25-RR (TAPE)		2.0000	st	
390	10300202	Trimmer 2k top 25turn (T93YB)		2.0000	st	
30	10250340	Zenerdiode 2V4 / 400mW		1.0000	st	
40	10250362	Zenerdiode 4V7/400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
270	10401253	Capacitor 10n R5.0 poly		4.0000	st	
230	10400213	Capacitor 10p R2.5 kerk		2.0000	st	
240	10400217	Capacitor 22p R2.5 3mm		1.0000	st	
260	10401241	Capacitor 100n/50V R5.0 ker		14.0000	st	
250	10400225	Capacitor 100pf R2.5 ker		1.0000	st	
290	10400262	Capacitor 150n R7.5 poly		1.0000	st	
300	10400269	Capacitor 220n R5.0 poly		4.0000	st	
280	10401261	Capacitor 100n R5.0 poly		1.0000	st	
310	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
10	10250342	Diode 1N4148 (signal)		5.0000	st	
410	10400292	Elco 100uF/ 25V rad R5.0		1.0000	st	
430	10400290	Elco 220uF/ 25V radial R5.0		4.0000	st	
420	10400243	Elco 220uF/16V rad R5 6x12mm		1.0000	st	
400	10250017	Fet J175 (P-channel switch)		1.0000	st	
440	10600510	Header 2P Lock 0° 2.54		1.0000	st	
450	10600512	Header 4P Lock 0° 2.54		2.0000	st	
460	10600452	Header 10p 90° R2.54		1.0000	st	
470	10600140	Header 34p 90° R2.54		1.0000	st	
330	10250004	IC 4053B (HCF4053 BEY)DIL		2.0000	st	
350	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
340	10250059	IC CD4069 6 inv. buffer		1.0000	st	
360	10250058	IC L272 MB DIL-8		1.0000	st	
370	10250304	IC TL072 CP TI DIL-8		1.0000	st	
380	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
500	10600394	IC-socket 8 pins		1.0000	st	
490	10600395	IC-socket 14 pins:fork-contact		2.0000	st	
510	10600396	IC-socket 16 pins:fork-contact		2.0000	st	
480	10201314	PCB Octagon-14a (master fdrcn)		1.0000	st	
30	10350517	Resistor 0E 5% 1/4W		2.0000	st	
40	10350701	Resistor 1E0 5% 1/4W		4.0000	st	
180	10350765	Resistor 1M0 5% 1/4W		3.0000	st	
70	10350729	Resistor 1k0 5% 1/4W		1.0000	st	
50	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
60	10350703	Resistor 2E2 5% 1/4W		1.0000	st	
190	10350835	Resistor 2k00 1% 1/4W		2.0000	st	
80	10350733	Resistor 2k2 5% 1/4W		1.0000	st	
90	10350737	Resistor 4k7 5% 1/4W		2.0000	st	
100	10350741	Resistor 10K 5% 1/4W		2.0000	st	
110	10350744	Resistor 18k 5% 1/4W		1.0000	st	
200	10350856	Resistor 20k0 1% 1/4W		7.0000	st	
210	10350858	Resistor 22k1 1% 1/4W		1.0000	st	
120	10350747	Resistor 33k 5% 1/4W		1.0000	st	
130	10350748	Resistor 39k 5% 1/4W		1.0000	st	
140	10350749	Resistor 47K 5% 1/4W		2.0000	st	
220	10350866	Resistor 47k5 1% 1/4W		2.0000	st	
150	10350753	Resistor 100K 5% 1/4W		2.0000	st	
160	10350763	Resistor 680k 5% 1/4W		1.0000	st	
170	10350004	Resistor NTC WTF4k7		1.0000	st	
390	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	
320	10300148	Trimmer 250k 1turn hor (H)		1.0000	st	
20	10250340	Zenerdiode 2V4 / 400mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
380	10401250	Capacitor 4n7 R5.0 poly		4.0000	st	
330	10400213	Capacitor 10p R2.5 kerk		40.0000	st	
390	10401254	Capacitor 15n R5.0 poly		8.0000	st	
340	10400216	Capacitor 18p R2.5 ker		8.0000	st	
400	10400277	Capacitor 22n R5.0 poly		4.0000	st	
350	10400221	Capacitor 47p R2.5 ker		4.0000	st	
420	10401260	Capacitor 68n R5.0 poly		4.0000	st	
360	10401241	Capacitor 100n/50V R5.0 ker		129.0000	st	
450	10400270	Capacitor 470n R5.0 poly		2.0000	st	
430	10401261	Capacitor 100n R5.0 poly		2.0000	st	
370	10401247	Capacitor 1n5 R5.0 poly		4.0000	st	
460	10401268	Capacitor 1uF R5.0 poly		2.0000	st	
440	10401265	Capacitor 330n R5.0 poly		10.0000	st	
410	10401258	Capacitor 47n R5.0 poly		2.0000	st	
30	10250342	Diode 1N4148 (signal)		2.0000	st	
630	10400280	Elco 2u2/50V radial R5.0		4.0000	st	
640	10400292	Elco 100uF/ 25V rad R5.0		12.0000	st	
660	10400290	Elco 220uF/ 25V radial R5.0		5.0000	st	
650	10400243	Elco 220uF/16V rad R5 6x12mm		54.0000	st	
620	10400284	Elco 10uF/50V radial R5.0		2.0000	st	
590	10250338	Fet J112 (N-channel switch)		4.0000	st	
600	10250017	Fet J175 (P-channel switch)		4.0000	st	
670	10600512	Header 4P Lock 0° 2.54		9.0000	st	
680	10600515	Header 4P Lock 90° 2.54		1.0000	st	
690	10600513	Header 5P Lock 0° 2.54		2.0000	st	
730	10600435	Header 10p 0° nobox R2.54		2.0000	st	
700	10600438	Header 16p 0° nobox R2.54		2.0000	st	
710	10600140	Header 34p 90° R2.54		2.0000	st	
720	10600141	Header 64p 90° R2.54		2.0000	st	
490	10250025	IC 4051B (8 chann multiplexer)		5.0000	st	
500	10250057	IC 4052 DIL-16		3.0000	st	
510	10250004	IC 4053B (HCF4053 BEY)DIL		26.0000	st	
520	10250094	IC 4094 DIL		11.0000	st	
530	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
540	10250049	IC SN74HC139 (2to4line dec)		4.0000	st	
550	10250032	IC THAT 2180 BL08-U (VCA)		4.0000	st	
560	10250304	IC TL072 CP TI DIL-8		22.0000	st	
570	10250305	IC TL074 CN TI (quad-opamp)		6.0000	st	
800	10600394	IC-socket 8 pins		22.0000	st	
790	10600402	IC-socket 8 pins:SIL 2.54mm		4.0000	st	
810	10600395	IC-socket 14 pins:fork-contact		6.0000	st	
820	10600396	IC-socket 16 pins:fork-contact		49.0000	st	
780	10201320	PCB Octagon-20A (stereo-chn)		1.0000	st	
770	10300415	Pot RK09 50kB/10kB/10kB		13.0000	st	
760	10300418	PotRK 100kCx4-50kB		4.0000	st	
610	10550010	Relay MT212VC93402 12V (2x om)		3.0000	st	
40	10350517	Resistor 0E 5% 1/4W		1.0000	st	
50	10350701	Resistor 1E0 5% 1/4W		1.0000	st	
130	10350729	Resistor 1k0 5% 1/4W		22.0000	st	
260	10350827	Resistor 1k10 1% 1/4W		2.0000	st	
270	10350832	Resistor 1k37 1% 1/4W		2.0000	st	
140	10350731	Resistor 1k5 5% 1/4W		9.0000	st	
60	10350703	Resistor 2E2 5% 1/4W		6.0000	st	
150	10350733	Resistor 2k2 5% 1/4W		1.0000	st	
160	10350734	Resistor 2k7 5% 1/4W		2.0000	st	
170	10350736	Resistor 3k9 5% 1/4W		8.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
180	10350737	Resistor 4k7 5% 1/4W		41.0000	st	
280	10350844	Resistor 4k75 1% 1/4W		1.0000	st	
190	10350739	Resistor 6k8 5% 1/4W		16.0000	st	
200	10350741	Resistor 10K 5% 1/4W		26.0000	st	
250	10350776	Resistor 10M0 5% 1/4W		8.0000	st	
290	10350848	Resistor 10k0 1% 1/4W		115.0000	st	
300	10350850	Resistor 11k0 1% 1/4W		5.0000	st	
310	10350853	Resistor 15k8 1% 1/4W		8.0000	st	
320	10350856	Resistor 20k0 1% 1/4W		12.0000	st	
70	10350713	Resistor 47E 5% 1/4W		8.0000	st	
210	10350749	Resistor 47K 5% 1/4W		28.0000	st	
80	10350714	Resistor 56E 5% 1/4W		2.0000	st	
90	10350717	Resistor 100E 5% 1/4W		4.0000	st	
220	10350753	Resistor 100K 5% 1/4W		52.0000	st	
230	10350758	Resistor 270k 5% 1/4W		4.0000	st	
240	10350761	Resistor 470k 5% 1/4W		6.0000	st	
100	10350727	Resistor 680E 5% 1/4W		3.0000	st	
110	10350728	Resistor 820E 5% 1/4W		1.0000	st	
120	10350029	Resistor array 680E sil8 ncom		23.0000	st	
740	10550205	Switch Alps 2p mini MOMENT		13.0000	st	
750	10550415	Switch Alps 4pole mini NS		8.0000	st	
580	10250332	Transistor BC337/25-RR Tape!!!		16.0000	st	
480	10300203	Trimmer 100k H 25turn (T93YB)		4.0000	st	
470	10300168	Trimmer 50k 15turn (T18)		4.0000	st	
10	10250353	Zenerdiode 12V0/1.3W		1.0000	st	
20	10250350	Zenerdiode 18V0/400mW		6.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
330	10401253	Capacitor 10n R5.0 poly		4.0000	st	
270	10400213	Capacitor 10p R2.5 kerk		12.0000	st	
280	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
290	10400221	Capacitor 47p R2.5 ker		8.0000	st	
300	10400223	Capacitor 68p R2.5 ker		2.0000	st	
320	10401241	Capacitor 100n/50V R5.0 ker		77.0000	st	
310	10400225	Capacitor 100pf R2.5 ker		2.0000	st	
350	10400262	Capacitor 150n R7.5 poly		2.0000	st	
360	10400269	Capacitor 220n R5.0 poly		8.0000	st	
340	10401261	Capacitor 100n R5.0 poly		2.0000	st	
370	10401268	Capacitor 1uF R5.0 poly		2.0000	st	
20	10250342	Diode 1N4148 (signal)		10.0000	st	
530	10400292	Elco 100uF/ 25V rad R5.0		4.0000	st	
550	10400290	Elco 220uF/ 25V radial R5.0		5.0000	st	
540	10400243	Elco 220uF/16V rad R5 6x12mm		36.0000	st	
520	10250017	Fet J175 (P-channel switch)		2.0000	st	
560	10600502	Header 2p Lock 90° 2.54		2.0000	st	
570	10600478	Header 4P 0° R 2.54		4.0000	st	
580	10600515	Header 4P Lock 90° 2.54		5.0000	st	
590	10600438	Header 16p 0° nobox R2.54		6.0000	st	
600	10600141	Header 64p 90° R2.54		3.0000	st	
400	10250040	IC 40106B DIL		1.0000	st	
410	10250025	IC 4051B (8 chann multiplexer)		2.0000	st	
420	10250057	IC 4052 DIL-16		2.0000	st	
430	10250004	IC 4053B (HCF4053 BEY)DIL		30.0000	st	
450	10250094	IC 4094 DIL		12.0000	st	
460	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
440	10250059	IC CD4069 6 inv. buffer		1.0000	st	
470	10250058	IC L272 MB DIL-8		2.0000	st	
480	10250307	IC NE5532 AP TI (dual-opamp)		8.0000	st	
490	10250304	IC TL072 CP TI DIL-8		1.0000	st	
500	10250305	IC TL074 CN TI (quad-opamp)		2.0000	st	
630	10600394	IC-socket 8 pins		11.0000	st	
640	10600395	IC-socket 14 pins:fork-contact		4.0000	st	
650	10600396	IC-socket 16 pins:fork-contact		46.0000	st	
620	10201321	PCB Octagon-21A (stereo-sub)		1.0000	st	
610	10300411	Pot RK09 50kB/50kA-50kB/50kA		6.0000	st	
40	10350517	Resistor 0E 5% 1/4W		1.0000	st	
50	10350701	Resistor 1E0 5% 1/4W		11.0000	st	
210	10350765	Resistor 1M0 5% 1/4W		6.0000	st	
100	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
60	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
220	10350835	Resistor 2k00 1% 1/4W		4.0000	st	
110	10350733	Resistor 2k2 5% 1/4W		3.0000	st	
120	10350737	Resistor 4k7 5% 1/4W		4.0000	st	
70	10350705	Resistor 10E 5% 1/4W		1.0000	st	
130	10350741	Resistor 10K 5% 1/4W		4.0000	st	
230	10350848	Resistor 10k0 1% 1/4W		110.0000	st	
140	10350744	Resistor 18k 5% 1/4W		2.0000	st	
240	10350856	Resistor 20k0 1% 1/4W		14.0000	st	
250	10350858	Resistor 22k1 1% 1/4W		2.0000	st	
150	10350747	Resistor 33k 5% 1/4W		2.0000	st	
160	10350748	Resistor 39k 5% 1/4W		2.0000	st	
170	10350749	Resistor 47K 5% 1/4W		4.0000	st	
260	10350866	Resistor 47k5 1% 1/4W		4.0000	st	
180	10350753	Resistor 100K 5% 1/4W		6.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
80	10350727	Resistor 680E 5% 1/4W		2.0000	st	
190	10350763	Resistor 680k 5% 1/4W		2.0000	st	
200	10350004	Resistor NTC WTF4k7		2.0000	st	
90	10350029	Resistor array 680E sil8 ncom		8.0000	st	
510	10250332	Transistor BC337/25-RR Tape!!!		2.0000	st	
390	10300519	Trimmer 100k 15turn (T18)		2.0000	st	
380	10300166	Trimmer 20k 15turn (T18)		2.0000	st	
10	10250353	Zenerdiode 12V0/1.3W		1.0000	st	
30	10250340	Zenerdiode 2V4 / 400mW		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
20	10250342	Diode 1N4148 (signal)		140.0000	st	
40	10550100	Encoder ECW 1 JB 24 BC 0024		1.0000	st	
30	10600517	Header 16p (single row 16p)		15.0000	st	
10	10201330	PCB Octagon-30a (cntrl/keybrd)		1.0000	st	
50	10550206	Switch Zippy Black+Led moment		90.0000	st	
60	10550204	Switch Zippy Gray+Led moment		35.0000	st	
70	10550200	Switch Zippy Red+led moment		15.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
550	10950470	Battery 3V (lithium knoopcel)		1.0000	st	
540	10950471	Battery holder knoopcel		1.0000	st	
580	10700710	Bout M3x12 bolkop pozidrive		1.0000	st	
240	10401253	Capacitor 10n R5.0 poly		6.0000	st	
210	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
230	10401241	Capacitor 100n/50V R5.0 ker		37.0000	st	
220	10400230	Capacitor 270p R2.5 ker		1.0000	st	
490	10600516	Conn 16p (single row 16p)		16.0000	st	
290	10250396	Crystal 12.0000 Mhz		1.0000	st	
20	10250342	Diode 1N4148 (signal)		15.0000	st	
260	10400292	Elco 100uF/ 25V rad R5.0		5.0000	st	
270	10400290	Elco 220uF/ 25V radial R5.0		3.0000	st	
250	10400284	Elco 10uF/50V radial R5.0		1.0000	st	
560	10250270	Fet BST76a/BS107 (Nch switch)		1.0000	st	
450	10600510	Header 2P Lock 0° 2.54		1.0000	st	
470	10600505	Header 2p pin 0° sngl		1.0000	st	
460	10600511	Header 3P Lock 0° R 2.54		4.0000	st	
480	10600478	Header 4P 0° R 2.54		1.0000	st	
500	10600506	Header 10P box 0° 2.54		1.0000	st	
510	10600435	Header 10p 0° nobox R2.54		1.0000	st	
520	10600142	Header 34p 0° R2.54		2.0000	st	
530	10720663	Heatsink KL-207/38.1/SW 207180		1.0000	st	
360	10250094	IC 4094 DIL		18.0000	st	
570	10250034	IC 74HC132 DIL		1.0000	st	
410	10250048	IC 74HC138 (3to8 line decoder)		3.0000	st	
400	10250035	IC 74HC14 DIL-14		1.0000	st	
420	10250033	IC 74HC573 dil versie		1.0000	st	
370	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
430	10250036	IC 80C552 (8-bit micro-comptr)		1.0000	st	
390	10250039	IC BS62LV256PC-70 ram 28pins		1.0000	st	
380	10250027	IC MX27C512-70 XF1		1.0000	st	
440	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
310	10600395	IC-socket 14 pins:fork-contact		3.0000	st	
320	10600396	IC-socket 16 pins:fork-contact		21.0000	st	
330	10600398	IC-socket 20 pins:fork-contact		1.0000	st	
340	10600401	IC-socket 28 pins:fork-contact		2.0000	st	
350	10600403	IC-socket 68 pins:PLCC Socket		1.0000	st	
30	10250387	Led 3mm red SLR-03A510-020		1.0000	st	
590	10700610	Moer M3		1.0000	st	
10	10201331	PCB Octagon-31a (cntrl/CPU)		1.0000	st	
50	10350517	Resistor 0E 5% 1/4W		2.0000	st	
160	10350517	Resistor 0E 5% 1/4W		1.0000	st	
60	10350701	Resistor 1E0 5% 1/4W		1.0000	st	
40	10350729	Resistor 1k0 5% 1/4W		3.0000	st	
80	10350730	Resistor 1k2 5% 1/4W		1.0000	st	
100	10350731	Resistor 1k5 5% 1/4W		1.0000	st	
150	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
120	10350705	Resistor 10E 5% 1/4W		1.0000	st	
130	10350741	Resistor 10K 5% 1/4W		5.0000	st	
140	10350776	Resistor 10M0 5% 1/4W		4.0000	st	
170	10350713	Resistor 47E 5% 1/4W		26.0000	st	
180	10350717	Resistor 100E 5% 1/4W		4.0000	st	
110	10350753	Resistor 100K 5% 1/4W		1.0000	st	
70	10350727	Resistor 680E 5% 1/4W		2.0000	st	
90	10350728	Resistor 820E 5% 1/4W		1.0000	st	
200	10350029	Resistor array 680E sil8 ncom		35.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
190	10350031	Resistor array 8x 10k 9p SIL		1.0000	st	
280	10250333	Transistor BC327/25-RR (TAPE)		1.0000	st	
300	10300166	Trimmer 20k 15turn (T18)		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
20	10250342	Diode 1N4148 (signal)		24.0000	st	
30	10600517	Header 16p (single row 16p)		3.0000	st	
10	10201332	PCB Octagon-32a (cntrl/mcr-up)		1.0000	st	
40	10550457	Switch Airl 97320037F+97.910.9		20.0000	st	
50	10550456	Switch Oct 99-455.837+99-901.9		5.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
60	10401241	Capacitor 100n/50V R5.0 ker		4.0000	st	
120	10600516	Conn 16p (single row 16p)		3.0000	st	
70	10400292	Elco 100uF/ 25V rad R5.0		1.0000	st	
80	10400302	Elco 100uF/ 63V radial R5.0		2.0000	st	
130	10600142	Header 34p 0° R2.54		1.0000	st	
110	10250094	IC 4094 DIL		3.0000	st	
100	10600396	IC-socket 16 pins:fork-contact		3.0000	st	
10	10201333	PCB Octagon-33a (cntrl/mcr-lo)		1.0000	st	
30	10350732	Resistor 1k8 5% 1/4W		25.0000	st	
50	10350704	Resistor 4E7 5% 1/4W		2.0000	st	
40	10350741	Resistor 10K 5% 1/4W		50.0000	st	
90	10250332	Transistor BC337/25-RR Tape!!!		25.0000	st	
20	10250353	Zenerdiode 12V0/1.3W		25.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
110	10400213	Capacitor 10p R2.5 kerk		24.0000	st	
120	10400217	Capacitor 22p R2.5 3mm		1.0000	st	
130	10400223	Capacitor 68p R2.5 ker		17.0000	st	
140	10401241	Capacitor 100n/50V R5.0 ker		159.0000	st	
320	10250342	Diode 1N4148 (signal)		4.0000	st	
150	10400292	Elco 100uF/ 25V rad R5.0		2.0000	st	
170	10400290	Elco 220uF/ 25V radial R5.0		3.0000	st	
160	10400243	Elco 220uF/16V rad R5 6x12mm		110.0000	st	
420	10600512	Header 4P Lock 0° 2.54		2.0000	st	
430	10600142	Header 34p 0° R2.54		1.0000	st	
270	10600140	Header 34p 90° R2.54		3.0000	st	
280	10600141	Header 64p 90° R2.54		3.0000	st	
200	10250025	IC 4051B (8 chann multiplexer)		2.0000	st	
400	10250057	IC 4052 DIL-16		20.0000	st	
210	10250004	IC 4053B (HCF4053 BEY)DIL		14.0000	st	
220	10250094	IC 4094 DIL		6.0000	st	
230	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
250	10250179	IC DRV-134PA (SSM2142)		32.0000	st	
240	10250307	IC NE5532 AP TI (dual-opamp)		11.0000	st	
260	10250304	IC TL072 CP TI DIL-8		13.0000	st	
180	10600394	IC-socket 8 pins		40.0000	st	
190	10600396	IC-socket 16 pins:fork-contact		42.0000	st	
10	10201340	PCB Octagon-40a (mstr-aux)		1.0000	st	
300	10300423	RK09 10KAx2 Short version		16.0000	st	
330	10350701	Resistor 1E0 5% 1/4W		2.0000	st	
60	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
30	10350733	Resistor 2k2 5% 1/4W		1.0000	st	
380	10350736	Resistor 3k9 5% 1/4W		1.0000	st	
40	10350737	Resistor 4k7 5% 1/4W		34.0000	st	
70	10350879	Resistor 7k87 1% 1/4W		32.0000	st	
340	10350705	Resistor 10E 5% 1/4W		2.0000	st	
390	10350741	Resistor 10K 5% 1/4W		2.0000	st	
440	10351741	Resistor 10k 1% 1/8W		80.0000	st	
80	10350848	Resistor 10k0 1% 1/4W		59.0000	st	
90	10350853	Resistor 15k8 1% 1/4W		8.0000	st	
100	10350856	Resistor 20k0 1% 1/4W		8.0000	st	
350	10350717	Resistor 100E 5% 1/4W		2.0000	st	
50	10350753	Resistor 100K 5% 1/4W		53.0000	st	
360	10350727	Resistor 680E 5% 1/4W		2.0000	st	
370	10350029	Resistor array 680E sil8 ncom		18.0000	st	
290	10550205	Switch Alps 2p mini MOMENT		33.0000	st	
410	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	
20	10250353	Zenerdiode 12V0/1.3W		1.0000	st	
310	10250350	Zenerdiode 18V0/400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
460	10400236	Capacitor 1n R2.5 ker		8.0000	st	
490	10401246	Capacitor 1n0 R5.0 poly		6.0000	st	
500	10401253	Capacitor 10n R5.0 poly		4.0000	st	
420	10400213	Capacitor 10p R2.5 kerk		85.0000	st	
430	10400216	Capacitor 18p R2.5 ker		4.0000	st	
440	10400217	Capacitor 22p R2.5 3mm		3.0000	st	
450	10400223	Capacitor 68p R2.5 ker		3.0000	st	
470	10401241	Capacitor 100n/50V R5.0 ker		116.0000	st	
520	10400269	Capacitor 220n R5.0 poly		1.0000	st	
530	10400270	Capacitor 470n R5.0 poly		2.0000	st	
510	10401261	Capacitor 100n R5.0 poly		1.0000	st	
480	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
20	10250342	Diode 1N4148 (signal)		2.0000	st	
550	10400280	Elco 2u2/50V radial R5.0		2.0000	st	
560	10400286	Elco 22uF/ 50V radial R5.0		1.0000	st	
570	10400289	Elco 47uF/ 63V radial R5.0		6.0000	st	
580	10400292	Elco 100uF/ 25V rad R5.0		5.0000	st	
600	10400290	Elco 220uF/ 25V radial R5.0		5.0000	st	
590	10400243	Elco 220uF/16V rad R5 6x12mm		119.0000	st	
540	10400279	Elco 1uF/100V radial R5.0		3.0000	st	
780	10600511	Header 3P Lock 0° R 2.54		2.0000	st	
760	10600513	Header 5P Lock 0° 2.54		2.0000	st	
830	10600506	Header 10P box 0° 2.54		1.0000	st	
770	10600509	Header 20P 0° 2.54		1.0000	st	
790	10600456	Header 20p 90° R2.54		1.0000	st	
800	10600142	Header 34p 0° R2.54		3.0000	st	
810	10600140	Header 34p 90° R2.54		2.0000	st	
820	10600141	Header 64p 90° R2.54		2.0000	st	
680	10250109	IC 40109 (volt.level shifter)		1.0000	st	
660	10250004	IC 4053B (HCF4053 BEY)DIL		15.0000	st	
670	10250094	IC 4094 DIL		3.0000	st	
690	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
700	10250320	IC 7815 T0220 Toshiba volt.reg		1.0000	st	
730	10250179	IC DRV-134PA (SSM2142)		12.0000	st	
710	10250307	IC NE5532 AP TI (dual-opamp)		15.0000	st	
720	10250184	IC SSM2019BN or INA217AIP		4.0000	st	
740	10250304	IC TL072 CP TI DIL-8		10.0000	st	
750	10250305	IC TL074 CN TI (quad-opamp)		7.0000	st	
630	10600394	IC-socket 8 pins		35.0000	st	
640	10600395	IC-socket 14 pins:fork-contact		7.0000	st	
650	10600396	IC-socket 16 pins:fork-contact		19.0000	st	
10	10201341	PCB Octagon-41a (mstr-osc)		1.0000	st	
870	10300374	Potm.16 1x20kB/1x10kRD (gain)		4.0000	st	
880	10300423	RK09 10Kx2 Short version		3.0000	st	
890	10300420	RK09 10KBx2cc Short version		2.0000	st	
80	10350517	Resistor 0E 5% 1/4W		1.0000	st	
280	10350765	Resistor 1M0 5% 1/4W		1.0000	st	
90	10350729	Resistor 1k0 5% 1/4W		3.0000	st	
100	10350732	Resistor 1k8 5% 1/4W		6.0000	st	
290	10350703	Resistor 2E2 5% 1/4W		6.0000	st	
110	10350733	Resistor 2k2 5% 1/4W		5.0000	st	
370	10350842	Resistor 3k01 1% 1/4W		1.0000	st	
120	10350735	Resistor 3k3 5% 1/4W		1.0000	st	
130	10350736	Resistor 3k9 5% 1/4W		1.0000	st	
300	10350704	Resistor 4E7 5% 1/4W		1.0000	st	
140	10350737	Resistor 4k7 5% 1/4W		11.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
320	10350844	Resistor 4k75 1% 1/4W		8.0000	st	
380	10350879	Resistor 7k87 1% 1/4W		9.0000	st	
330	10350878	Resistor 9k09 1% 1/4W		1.0000	st	
190	10350705	Resistor 10E 5% 1/4W		4.0000	st	
150	10350741	Resistor 10K 5% 1/4W		8.0000	st	
390	10350848	Resistor 10k0 1% 1/4W		169.0000	st	
160	10350742	Resistor 12k 5% 1/4W		2.0000	st	
170	10350743	Resistor 15k 5% 1/4W		3.0000	st	
400	10350856	Resistor 20k0 1% 1/4W		65.0000	st	
180	10350745	Resistor 22k 5% 1/4W		1.0000	st	
310	10350711	Resistor 33E 5% 1/4W		3.0000	st	
200	10350747	Resistor 33k 5% 1/4W		3.0000	st	
340	10350863	Resistor 34k8 1% 1/4W		1.0000	st	
210	10350749	Resistor 47K 5% 1/4W		3.0000	st	
260	10350717	Resistor 100E 5% 1/4W		1.0000	st	
220	10350753	Resistor 100K 5% 1/4W		34.0000	st	
350	10350719	Resistor 150E 5% 1/4W		1.0000	st	
230	10350755	Resistor 150k 5% 1/4W		2.0000	st	
240	10350756	Resistor 180k 5% 1/4W		1.0000	st	
250	10350757	Resistor 220k 5% 1/4W		2.0000	st	
270	10350761	Resistor 470k 5% 1/4W		1.0000	st	
360	10350726	Resistor 560E 5% 1/4W		2.0000	st	
410	10350029	Resistor array 680E sil8 ncom		5.0000	st	
840	10550205	Switch Alps 2p mini MOMENT		5.0000	st	
850	10550414	Switch Alps 2pole mini NS		8.0000	st	
860	10550415	Switch Alps 4pole mini NS		22.0000	st	
620	10300519	Trimmer 100k 15turn (T18)		1.0000	st	
610	10300166	Trimmer 20k 15turn (T18)		4.0000	st	
30	10250353	Zenerdiode 12V0/1.3W		1.0000	st	
40	10250340	Zenerdiode 2V4 / 400mW		6.0000	st	
50	10250362	Zenerdiode 4V7/400mW		1.0000	st	
60	10250351	Zenerdiode 5V6/400mW		16.0000	st	
70	10250357	Zenerdiode 6V8/500mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
100	10401241	Capacitor 100n/50V R5.0 ker		4.0000	st	
110	10400284	Elco 10uF/50V radial R5.0		1.0000	st	
170	10550100	Encoder ECW 1 JB 24 BC 0024		1.0000	st	
160	10600517	Header 16p (single row 16p)		12.0000	st	
140	10250316	IC LM339 (comparator)		2.0000	st	
130	10600395	IC-socket 14 pins:fork-contact		2.0000	st	
150	10250407	Led Matrix 30mm TC12-11EWA		4.0000	st	
10	10201342	PCB Octagon-42a (mstr-keybrd)		1.0000	st	
30	10350731	Resistor 1k5 5% 1/4W		1.0000	st	
40	10350732	Resistor 1k8 5% 1/4W		2.0000	st	
60	10350850	Resistor 11k0 1% 1/4W		1.0000	st	
70	10350891	Resistor 324E 1% 1/4W		7.0000	st	
50	10350761	Resistor 470k 5% 1/4W		1.0000	st	
80	10350821	Resistor 487E 1% 1/4W		1.0000	st	
90	10350727	Resistor 680E 5% 1/4W		4.0000	st	
180	10550206	Switch Zippy Black+Led moment		23.0000	st	
200	10550204	Switch Zippy Gray+Led moment		16.0000	st	
190	10550200	Switch Zippy Red+led moment		9.0000	st	
120	10300200	Trimmer 20k Top H 25trn(T93YB)		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
70	10401241	Capacitor 100n/50V R5.0 ker		3.0000	st	
20	10250342	Diode 1N4148 (signal)		24.0000	st	
80	10400292	Elco 100uF/ 25V rad R5.0		1.0000	st	
90	10400302	Elco 100uF/ 63V radial R5.0		1.0000	st	
130	10600140	Header 34p 90° R2.54		1.0000	st	
120	10250094	IC 4094 DIL		3.0000	st	
110	10600396	IC-socket 16 pins:fork-contact		3.0000	st	
10	10201343	PCB Octagon-43a (mstr-mcro)		1.0000	st	
40	10350732	Resistor 1k8 5% 1/4W		25.0000	st	
60	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
50	10350741	Resistor 10K 5% 1/4W		50.0000	st	
140	10550457	Switch Airl 97320037F+97.910.9		25.0000	st	
100	10250332	Transistor BC337/25-RR Tape!!!		25.0000	st	
30	10250353	Zenerdiode 12V0/1.3W		25.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
30	10401241	Capacitor 100n/50V R5.0 ker		3.0000	st	
20	10250342	Diode 1N4148 (signal)		18.0000	st	
70	10400292	Elco 100uF/ 25V rad R5.0		1.0000	st	
40	10600142	Header 34p 0° R2.54		1.0000	st	
80	10250094	IC 4094 DIL		3.0000	st	
90	10600396	IC-socket 16 pins:fork-contact		3.0000	st	
10	10201344	PCB Octagon-44B (mstr-mxt-key)		1.0000	st	
100	10350703	Resistor 2E2 5% 1/4W		1.0000	st	
50	10350727	Resistor 680E 5% 1/4W		2.0000	st	
110	10350029	Resistor array 680E sil8 ncom		4.0000	st	
60	10550457	Switch Airl 97320037F+97.910.9		18.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
580	10700710	Bout M3x12 bolkop pozidrive		1.0000	st	
240	10401253	Capacitor 10n R5.0 poly		8.0000	st	
210	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
230	10401241	Capacitor 100n/50V R5.0 ker		42.0000	st	
220	10400230	Capacitor 270p R2.5 ker		1.0000	st	
450	10600516	Conn 16p (single row 16p)		13.0000	st	
380	10250398	Crystal 11.0592 Mhz		1.0000	st	
20	10250342	Diode 1N4148 (signal)		12.0000	st	
400	10400292	Elco 100uF/ 25V rad R5.0		6.0000	st	
420	10400290	Elco 220uF/ 25V radial R5.0		3.0000	st	
410	10400243	Elco 220uF/16V rad R5 6x12mm		1.0000	st	
390	10400284	Elco 10uF/50V radial R5.0		2.0000	st	
370	10250270	Fet BST76a/BS107 (Nch switch)		1.0000	st	
480	10600510	Header 2P Lock 0° 2.54		1.0000	st	
430	10600478	Header 4P 0° R 2.54		1.0000	st	
440	10600512	Header 4P Lock 0° 2.54		4.0000	st	
490	10600435	Header 10p 0° nobox R2.54		1.0000	st	
470	10600520	Header 16p box 0° 2.54		1.0000	st	
500	10600509	Header 20P 0° 2.54		3.0000	st	
460	10600142	Header 34p 0° R2.54		4.0000	st	
510	10720662	Heatsink KL-169/SW T0-220		1.0000	st	
250	10250025	IC 4051B (8 chann multiplexer)		2.0000	st	
260	10250094	IC 4094 DIL		14.0000	st	
310	10250034	IC 74HC132 DIL		2.0000	st	
320	10250048	IC 74HC138 (3to8 line decoder)		4.0000	st	
300	10250035	IC 74HC14 DIL-14		1.0000	st	
330	10250033	IC 74HC573 dil versie		5.0000	st	
270	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
340	10250036	IC 80C552 (8-bit micro-comptr)		1.0000	st	
290	10250039	IC BS62LV256PC-70 ram 28pins		1.0000	st	
280	10250027	IC MX27C512-70 XF1		1.0000	st	
350	10250304	IC TL072 CP TI DIL-8		1.0000	st	
520	10600394	IC-socket 8 pins		1.0000	st	
530	10600395	IC-socket 14 pins:fork-contact		3.0000	st	
540	10600396	IC-socket 16 pins:fork-contact		20.0000	st	
550	10600398	IC-socket 20 pins:fork-contact		5.0000	st	
560	10600401	IC-socket 28 pins:fork-contact		2.0000	st	
570	10600403	IC-socket 68 pins:PLCC Socket		1.0000	st	
590	10700610	Moer M3		1.0000	st	
10	10201345	PCB Octagon-45a (mstr-CPU)		1.0000	st	
30	10350517	Resistor 0E 5% 1/4W		2.0000	st	
70	10350517	Resistor 0E 5% 1/4W		1.0000	st	
40	10350701	Resistor 1E0 5% 1/4W		1.0000	st	
200	10350765	Resistor 1M0 5% 1/4W		2.0000	st	
130	10350729	Resistor 1k0 5% 1/4W		4.0000	st	
50	10350703	Resistor 2E2 5% 1/4W		5.0000	st	
150	10350735	Resistor 3k3 5% 1/4W		2.0000	st	
60	10350705	Resistor 10E 5% 1/4W		2.0000	st	
160	10350741	Resistor 10K 5% 1/4W		8.0000	st	
80	10350713	Resistor 47E 5% 1/4W		34.0000	st	
90	10350717	Resistor 100E 5% 1/4W		6.0000	st	
180	10350753	Resistor 100K 5% 1/4W		1.0000	st	
100	10350725	Resistor 470E 5% 1/4W		1.0000	st	
190	10350761	Resistor 470k 5% 1/4W		2.0000	st	
110	10350727	Resistor 680E 5% 1/4W		2.0000	st	
140	10350728	Resistor 820E 5% 1/4W		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
120	10350029	Resistor array 680E sil8 ncom		27.0000	st	
170	10350031	Resistor array 8x 10k 9p SIL		2.0000	st	
360	10250333	Transistor BC327/25-RR (TAPE)		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
590	10700710	Bout M3x12 bolkop pozidrive		1.0000	st	
420	10401253	Capacitor 10n R5.0 poly		8.0000	st	
90	10400213	Capacitor 10p R2.5 kerk		35.0000	st	
410	10400221	Capacitor 47p R2.5 ker		8.0000	st	
100	10400223	Capacitor 68p R2.5 ker		18.0000	st	
110	10401241	Capacitor 100n/50V R5.0 ker		127.0000	st	
460	10400270	Capacitor 470n R5.0 poly		1.0000	st	
440	10401261	Capacitor 100n R5.0 poly		1.0000	st	
450	10401265	Capacitor 330n R5.0 poly		1.0000	st	
430	10401258	Capacitor 47n R5.0 poly		1.0000	st	
180	10250342	Diode 1N4148 (signal)		25.0000	st	
120	10400292	Elco 100uF/ 25V rad R5.0		5.0000	st	
140	10400290	Elco 220uF/ 25V radial R5.0		3.0000	st	
130	10400243	Elco 220uF/16V rad R5 6x12mm		67.0000	st	
570	10600456	Header 20p 90° R2.54		1.0000	st	
560	10600142	Header 34p 0° R2.54		4.0000	st	
580	10600140	Header 34p 90° R2.54		2.0000	st	
270	10600141	Header 64p 90° R2.54		2.0000	st	
210	10720662	Heatsink KL-169/SW T0-220		1.0000	st	
200	10250004	IC 4053B (HCF4053 BEY)DIL		12.0000	st	
220	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
510	10250179	IC DRV-134PA (SSM2142)		36.0000	st	
230	10250275	IC LM1972N (M-DAC)		8.0000	st	
240	10250307	IC NE5532 AP TI (dual-opamp)		11.0000	st	
490	10250032	IC THAT 2180 BL08-U (VCA)		8.0000	st	
250	10250304	IC TL072 CP TI DIL-8		13.0000	st	
150	10600394	IC-socket 8 pins		42.0000	st	
500	10600402	IC-socket 8 pins:SIL 2.54mm		8.0000	st	
160	10600396	IC-socket 16 pins:fork-contact		12.0000	st	
170	10600398	IC-socket 20 pins:fork-contact		8.0000	st	
600	10700610	Moer M3		1.0000	st	
10	10201346	PCB Octagon-46a (mstr-joy)		1.0000	st	
520	10550001	Relay D1C121000 1xchnge minid		1.0000	st	
190	10350517	Resistor 0E 5% 1/4W		1.0000	st	
260	10350701	Resistor 1E0 5% 1/4W		1.0000	st	
380	10350832	Resistor 1k37 1% 1/4W		2.0000	st	
390	10350833	Resistor 1k50 1% 1/4W		16.0000	st	
60	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
40	10350733	Resistor 2k2 5% 1/4W		5.0000	st	
50	10350843	Resistor 5k11 1% 1/4W		2.0000	st	
330	10350739	Resistor 6k8 5% 1/4W		16.0000	st	
280	10350705	Resistor 10E 5% 1/4W		5.0000	st	
340	10350741	Resistor 10K 5% 1/4W		3.0000	st	
70	10350848	Resistor 10k0 1% 1/4W		73.0000	st	
400	10350850	Resistor 11k0 1% 1/4W		2.0000	st	
80	10350856	Resistor 20k0 1% 1/4W		41.0000	st	
350	10350746	Resistor 27k 5% 1/4W		8.0000	st	
290	10350714	Resistor 56E 5% 1/4W		1.0000	st	
360	10350753	Resistor 100K 5% 1/4W		4.0000	st	
300	10350719	Resistor 150E 5% 1/4W		8.0000	st	
310	10350721	Resistor 220E 5% 1/4W		16.0000	st	
370	10350758	Resistor 270k 5% 1/4W		8.0000	st	
320	10350728	Resistor 820E 5% 1/4W		1.0000	st	
530	10250335	Transistor 2SB737 (2SA1085E)		16.0000	st	
540	10250333	Transistor BC327/25-RR (TAPE)		8.0000	st	
550	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
480	10300203	Trimmer 100k H 25turn (T93YB)		8.0000	st	
470	10300202	Trimmer 2k top 25turn (T93YB)		9.0000	st	
20	10250353	Zenerdiode 12V0/1.3W		1.0000	st	
30	10250351	Zenerdiode 5V6/400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
170	10400213	Capacitor 10p R2.5 kerk		16.0000	st	
180	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
190	10401241	Capacitor 100n/50V R5.0 ker		58.0000	st	
360	10600041	Conn sub-D25 female pcb		3.0000	st	
20	10250342	Diode 1N4148 (signal)		5.0000	st	
200	10400292	Elco 100uF/ 25V rad R5.0		25.0000	st	
220	10400290	Elco 220uF/ 25V radial R5.0		3.0000	st	
210	10400243	Elco 220uF/16V rad R5 6x12mm		28.0000	st	
330	10600513	Header 5P Lock 0° 2.54		10.0000	st	
340	10600452	Header 10p 90° R2.54		1.0000	st	
390	10600456	Header 20p 90° R2.54		2.0000	st	
350	10600140	Header 34p 90° R2.54		1.0000	st	
270	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
300	10250179	IC DRV-134PA (SSM2142)		10.0000	st	
280	10250275	IC LM1972N (M-DAC)		4.0000	st	
290	10250307	IC NE5532 AP TI (dual-opamp)		1.0000	st	
320	10250304	IC TL072 CP TI DIL-8		12.0000	st	
250	10600394	IC-socket 8 pins		23.0000	st	
260	10600398	IC-socket 20 pins:fork-contact		4.0000	st	
380	10600530	Jack Break slimline S253-84		1.0000	st	
10	10201350	PCB Octagon-50a (CRM-connecto)		1.0000	st	
370	10550010	Relay MT212VC93402 12V (2x om)		24.0000	st	
50	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
100	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
60	10350733	Resistor 2k2 5% 1/4W		9.0000	st	
70	10350737	Resistor 4k7 5% 1/4W		2.0000	st	
110	10350705	Resistor 10E 5% 1/4W		3.0000	st	
80	10350741	Resistor 10K 5% 1/4W		18.0000	st	
150	10350848	Resistor 10k0 1% 1/4W		32.0000	st	
160	10350856	Resistor 20k0 1% 1/4W		8.0000	st	
120	10350713	Resistor 47E 5% 1/4W		16.0000	st	
130	10350717	Resistor 100E 5% 1/4W		2.0000	st	
90	10350753	Resistor 100K 5% 1/4W		16.0000	st	
140	10350728	Resistor 820E 5% 1/4W		2.0000	st	
230	10250332	Transistor BC337/25-RR Tape!!!		5.0000	st	
240	10300200	Trimmer 20k Top H 25trn(T93YB)		8.0000	st	
400	10600234	XLR chas 3p male alu pcb		4.0000	st	
40	10250350	Zenerdiode 18V0/400mW		5.0000	st	
30	10250351	Zenerdiode 5V6/400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
110	10400213	Capacitor 10p R2.5 kerk		42.0000	st	
120	10401241	Capacitor 100n/50V R5.0 ker		54.0000	st	
220	10600041	Conn sub-D25 female pcb		5.0000	st	
20	10250342	Diode 1N4148 (signal)		3.0000	st	
140	10400290	Elco 220uF/ 25V radial R5.0		2.0000	st	
130	10400243	Elco 220uF/16V rad R5 6x12mm		61.0000	st	
190	10600478	Header 4P 0° R 2.54		1.0000	st	
200	10600452	Header 10p 90° R2.54		1.0000	st	
280	10600456	Header 20p 90° R2.54		2.0000	st	
270	10600142	Header 34p 0° R2.54		1.0000	st	
210	10600140	Header 34p 90° R2.54		1.0000	st	
170	10250179	IC DRV-134PA (SSM2142)		30.0000	st	
180	10250304	IC TL072 CP TI DIL-8		11.0000	st	
160	10600394	IC-socket 8 pins		26.0000	st	
10	10201351	PCB Octagon-51a (Enc/Dec)		1.0000	st	
230	10550010	Relay MT212VC93402 12V (2x om)		11.0000	st	
60	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
240	10350843	Resistor 5k11 1% 1/4W		1.0000	st	
70	10350705	Resistor 10E 5% 1/4W		2.0000	st	
40	10350741	Resistor 10K 5% 1/4W		6.0000	st	
90	10350848	Resistor 10k0 1% 1/4W		42.0000	st	
250	10350852	Resistor 15k0 1% 1/4W		2.0000	st	
100	10350856	Resistor 20k0 1% 1/4W		40.0000	st	
50	10350753	Resistor 100K 5% 1/4W		33.0000	st	
80	10350723	Resistor 330E 5% 1/4W		1.0000	st	
150	10250332	Transistor BC337/25-RR Tape!!!		3.0000	st	
260	10300206	Trimmer 10k 15turn (T18)		1.0000	st	
30	10250350	Zenerdiode 18V0/400mW		3.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
220	10400213	Capacitor 10p R2.5 kerk		2.0000	st	
230	10400217	Capacitor 22p R2.5 3mm		5.0000	st	
240	10400218	Capacitor 27p R2.5 ker		2.0000	st	
260	10401241	Capacitor 100n/50V R5.0 ker		33.0000	st	
250	10400225	Capacitor 100pf R2.5 ker		1.0000	st	
270	10400269	Capacitor 220n R5.0 poly		1.0000	st	
280	10400270	Capacitor 470n R5.0 poly		1.0000	st	
720	10600115	Conn Keyb.MiniDin 808M-M6		2.0000	st	
580	10600114	Conn chassis DIN 5p female		5.0000	st	
620	10600041	Conn sub-D25 female pcb		1.0000	st	
610	10600043	Conn sub-D9 Fem Pcb 7906-09FHA		2.0000	st	
490	10250398	Crystal 11.0592 Mhz		1.0000	st	
500	10250396	Crystal 12.0000 Mhz		1.0000	st	
480	10250395	Crystal 6.00 Mhz		1.0000	st	
20	10250342	Diode 1N4148 (signal)		8.0000	st	
520	10400292	Elco 100uF/ 25V rad R5.0		7.0000	st	
530	10400290	Elco 220uF/ 25V radial R5.0		3.0000	st	
510	10400284	Elco 10uF/50V radial R5.0		6.0000	st	
470	10250270	Fet BST76a/BS107 (Nch switch)		1.0000	st	
540	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
570	10600512	Header 4P Lock 0° 2.54		15.0000	st	
560	10600513	Header 5P Lock 0° 2.54		5.0000	st	
600	10600140	Header 34p 90° R2.54		1.0000	st	
290	10250007	IC 4029 (4bit preset)FSC		1.0000	st	
330	10250014	IC 4N27 (opto-coupler)		1.0000	st	
700	10250012	IC 74HC125 (quad bistab. buf)		1.0000	st	
380	10250034	IC 74HC132 DIL		2.0000	st	
370	10250048	IC 74HC138 (3to8 line decoder)		2.0000	st	
350	10250035	IC 74HC14 DIL-14		7.0000	st	
360	10250070	IC 74HC21		1.0000	st	
390	10250033	IC 74HC573 dil versie		1.0000	st	
300	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
400	10250036	IC 80C552 (8-bit micro-comptr)		1.0000	st	
340	10250039	IC BS62LV256PC-70 ram 28pins		1.0000	st	
410	10250071	IC LTC-PSR smpte reader		1.0000	st	
420	10250072	IC MAX-232N DIL16(RS232 driver)		1.0000	st	
320	10250027	IC MX27C512-70 XF1		1.0000	st	
430	10250073	IC SN75179		1.0000	st	
450	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
310	10250061	IC TL16C554 FN PLC		4.0000	st	
710	10600394	IC-socket 8 pins		1.0000	st	
650	10600395	IC-socket 14 pins:fork-contact		12.0000	st	
660	10600396	IC-socket 16 pins:fork-contact		4.0000	st	
670	10600398	IC-socket 20 pins:fork-contact		1.0000	st	
680	10600401	IC-socket 28 pins:fork-contact		2.0000	st	
730	10600404	IC-socket 44 pins:PLCC Socket		1.0000	st	
690	10600403	IC-socket 68 pins:PLCC Socket		5.0000	st	
590	10600530	Jack Break slimline S253-84		1.0000	st	
10	10201352	PCB Octagon-52a (CPU-interfac)		1.0000	st	
440	10550001	Relay D1C121000 1xchnge minid		1.0000	st	
40	10350517	Resistor 0E 5% 1/4W		1.0000	st	
200	10350765	Resistor 1M0 5% 1/4W		5.0000	st	
140	10350729	Resistor 1k0 5% 1/4W		1.0000	st	
50	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
120	10350733	Resistor 2k2 5% 1/4W		1.0000	st	
130	10350737	Resistor 4k7 5% 1/4W		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
60	10350705	Resistor 10E 5% 1/4W		3.0000	st	
150	10350741	Resistor 10K 5% 1/4W		4.0000	st	
210	10350848	Resistor 10k0 1% 1/4W		12.0000	st	
160	10350745	Resistor 22k 5% 1/4W		2.0000	st	
70	10350713	Resistor 47E 5% 1/4W		16.0000	st	
170	10350749	Resistor 47K 5% 1/4W		1.0000	st	
80	10350717	Resistor 100E 5% 1/4W		1.0000	st	
90	10350721	Resistor 220E 5% 1/4W		5.0000	st	
180	10350761	Resistor 470k 5% 1/4W		14.0000	st	
100	10350727	Resistor 680E 5% 1/4W		3.0000	st	
110	10350728	Resistor 820E 5% 1/4W		1.0000	st	
190	10350764	Resistor 820k 5% 1/4W		2.0000	st	
550	10600414	Shunt 2p (mini jumper)		1.0000	st	
460	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	
630	10600425	XLR chas 3p female alu pcb		1.0000	st	
640	10600234	XLR chas 3p male alu pcb		1.0000	st	
30	10250340	Zenerdiode 2V4 / 400mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
40	10400289	Elco 47uF/ 63V radial R5.0		3.0000	st	
50	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
60	10600478	Header 4P 0° R 2.54		3.0000	st	
70	10600506	Header 10P box 0° 2.54		1.0000	st	
10	10201353	PCB Octagon-53a (listen input)		1.0000	st	
20	10350517	Resistor 0E 5% 1/4W		1.0000	st	
30	10350846	Resistor 6k81 1% 1/4W		6.0000	st	
80	10600425	XLR chas 3p female alu pcb		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
10	10401241	Capacitor 100n/50V R5.0 ker		1.0000	st	
100	10600041	Conn sub-D25 female pcb		4.0000	st	
80	10600521	Header 16p box 90° 2.54		1.0000	st	
50	10250094	IC 4094 DIL		1.0000	st	
60	10600396	IC-socket 16 pins:fork-contact		1.0000	st	
110	10201356	PCB Octagon-56p (Remote)		1.0000	st	
90	10700690	Platstaf 25x10x10mm M3+2holes		2.0000	st	
20	10350705	Resistor 10E 5% 1/4W		1.0000	st	
30	10350717	Resistor 100E 5% 1/4W		8.0000	st	
40	10350727	Resistor 680E 5% 1/4W		8.0000	st	
70	10250362	Zenerdiode 4V7/400mW		8.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
50	10401241	Capacitor 100n/50V R5.0 ker		17.0000	st	
10	10250342	Diode 1N4148 (signal)		45.0000	st	
70	10400292	Elco 100uF/ 25V rad R5.0		1.0000	st	
80	10600517	Header 16p (single row 16p)		6.0000	st	
60	10250094	IC 4094 DIL		17.0000	st	
130	10600396	IC-socket 16 pins:fork-contact		17.0000	st	
20	10250121	Led Display 9mm c.anode (red)		9.0000	st	
120	10201357	PCB Octagon-70p (Matrix keybr)		1.0000	st	
30	10350727	Resistor 680E 5% 1/4W		8.0000	st	
40	10350029	Resistor array 680E sil8 ncom		18.0000	st	
90	10550206	Switch Zippy Black+Led moment		13.0000	st	
100	10550204	Switch Zippy Gray+Led moment		24.0000	st	
110	10550200	Switch Zippy Red+led moment		8.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
390	10700710	Bout M3x12 bolkop pozidrive		1.0000	st	
110	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
120	10401241	Capacitor 100n/50V R5.0 ker		17.0000	st	
290	10600516	Conn 16p (single row 16p)		6.0000	st	
230	10250398	Crystal 11.0592 Mhz		1.0000	st	
10	10250342	Diode 1N4148 (signal)		3.0000	st	
250	10400292	Elco 100uF/ 25V rad R5.0		3.0000	st	
260	10400290	Elco 220uF/ 25V radial R5.0		2.0000	st	
240	10400284	Elco 10uF/50V radial R5.0		1.0000	st	
220	10250270	Fet BST76a/BS107 (Nch switch)		1.0000	st	
270	10600510	Header 2P Lock 0° 2.54		1.0000	st	
280	10600478	Header 4P 0° R 2.54		2.0000	st	
310	10600452	Header 10p 90° R2.54		4.0000	st	
300	10600142	Header 34p 0° R2.54		2.0000	st	
320	10720662	Heatsink KL-169/SW T0-220		1.0000	st	
130	10250094	IC 4094 DIL		6.0000	st	
180	10250048	IC 74HC138 (3to8 line decoder)		1.0000	st	
170	10250035	IC 74HC14 DIL-14		1.0000	st	
190	10250033	IC 74HC573 dil versie		1.0000	st	
140	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
200	10250036	IC 80C552 (8-bit micro-comptr)		1.0000	st	
160	10250039	IC BS62LV256PC-70 ram 28pins		1.0000	st	
150	10250027	IC MX27C512-70 XF1		1.0000	st	
350	10600395	IC-socket 14 pins:fork-contact		2.0000	st	
360	10600396	IC-socket 16 pins:fork-contact		6.0000	st	
370	10600398	IC-socket 20 pins:fork-contact		1.0000	st	
380	10600401	IC-socket 28 pins:fork-contact		2.0000	st	
340	10600403	IC-socket 68 pins:PLCC Socket		1.0000	st	
400	10700610	Moer M3		1.0000	st	
330	10201358	PCB Octagon-71A (Matrix CPU)		1.0000	st	
80	10350729	Resistor 1k0 5% 1/4W		2.0000	st	
20	10350703	Resistor 2E2 5% 1/4W		2.0000	st	
30	10350705	Resistor 10E 5% 1/4W		2.0000	st	
90	10350741	Resistor 10K 5% 1/4W		1.0000	st	
40	10350713	Resistor 47E 5% 1/4W		12.0000	st	
50	10350727	Resistor 680E 5% 1/4W		1.0000	st	
60	10350728	Resistor 820E 5% 1/4W		1.0000	st	
70	10350029	Resistor array 680E sil8 ncom		11.0000	st	
100	10350031	Resistor array 8x 10k 9p SIL		1.0000	st	
210	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
40	10401241	Capacitor 100n/50V R5.0 ker		4.0000	st	
10	10250342	Diode 1N4148 (signal)		18.0000	st	
70	10400292	Elco 100uF/ 25V rad R5.0		1.0000	st	
80	10600142	Header 34p 0° R2.54		1.0000	st	
50	10250094	IC 4094 DIL		3.0000	st	
110	10600396	IC-socket 16 pins:fork-contact		3.0000	st	
100	10201359	PCB Octagon-72A (Matrix Macro)		1.0000	st	
20	10350703	Resistor 2E2 5% 1/4W		2.0000	st	
30	10350719	Resistor 150E 5% 1/4W		18.0000	st	
90	10550457	Switch Airl 97320037F+97.910.9		18.0000	st	
60	10250332	Transistor BC337/25-RR Tape!!!		18.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
490	10401246	Capacitor 1n0 R5.0 poly		1.0000	st	
470	10400213	Capacitor 10p R2.5 kerk		2.0000	st	
480	10401241	Capacitor 100n/50V R5.0 ker		18.0000	st	
630	10400270	Capacitor 470n R5.0 poly		1.0000	st	
150	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
20	10250342	Diode 1N4148 (signal)		6.0000	st	
500	10400292	Elco 100uF/ 25V rad R5.0		3.0000	st	
530	10250338	Fet J112 (N-channel switch)		1.0000	st	
540	10250017	Fet J175 (P-channel switch)		1.0000	st	
380	10600510	Header 2P Lock 0° 2.54		2.0000	st	
400	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
350	10600478	Header 4P 0° R 2.54		1.0000	st	
600	10600513	Header 5P Lock 0° 2.54		1.0000	st	
570	10250325	IC 78L12 T092 SGS (volt.reg)		1.0000	st	
580	10250316	IC LM339 (comparator)		9.0000	st	
590	10250075	IC TL054 low offsett		1.0000	st	
680	10250304	IC TL072 CP TI DIL-8		1.0000	st	
690	10600394	IC-socket 8 pins		1.0000	st	
560	10600395	IC-socket 14 pins:fork-contact		10.0000	st	
10	10201360	PCB Octagon-60b (ledb.-chann)		1.0000	st	
160	10350829	Resistor 1k07 1% 1/4W		1.0000	st	
170	10350830	Resistor 1k21 1% 1/4W		1.0000	st	
180	10350831	Resistor 1k30 1% 1/4W		1.0000	st	
260	10350731	Resistor 1k5 5% 1/4W		1.0000	st	
200	10350579	Resistor 1k65 1% 1/4W		1.0000	st	
190	10350834	Resistor 1k82 1% 1/4W		1.0000	st	
210	10350834	Resistor 1k82 1% 1/4W		1.0000	st	
130	10350703	Resistor 2E2 5% 1/4W		2.0000	st	
220	10350836	Resistor 2k15 1% 1/4W		1.0000	st	
230	10350838	Resistor 2k37 1% 1/4W		1.0000	st	
240	10350905	Resistor 2k67 1% 1/4W		1.0000	st	
610	10350734	Resistor 2k7 5% 1/4W		1.0000	st	
250	10350842	Resistor 3k01 1% 1/4W		1.0000	st	
70	10350737	Resistor 4k7 5% 1/4W		3.0000	st	
650	10350738	Resistor 5k6 5% 1/4W		1.0000	st	
80	10350741	Resistor 10K 5% 1/4W		7.0000	st	
120	10350776	Resistor 10M0 5% 1/4W		2.0000	st	
640	10350749	Resistor 47K 5% 1/4W		1.0000	st	
270	10350911	Resistor 64E9 1% 1/4W		1.0000	st	
670	10350809	Resistor 88E7 1% 1/4W		1.0000	st	
620	10350810	Resistor 100E 1% 1/4W		1.0000	st	
140	10350717	Resistor 100E 5% 1/4W		1.0000	st	
100	10350753	Resistor 100K 5% 1/4W		3.0000	st	
290	10350806	Resistor 113E 1% 1/4W		1.0000	st	
280	10350854	Resistor 115E 1% 1/4W		1.0000	st	
110	10350754	Resistor 120k 5% 1/4W		3.0000	st	
50	10350805	Resistor 133E 1% 1/4W		2.0000	st	
300	10350906	Resistor 158E 1% 1/4W		2.0000	st	
60	10350720	Resistor 180E 5% 1/4W		3.0000	st	
90	10350756	Resistor 180k 5% 1/4W		1.0000	st	
320	10350847	Resistor 182E 1% 1/4W		2.0000	st	
310	10350812	Resistor 205E 1% 1/4W		1.0000	st	
340	10350885	Resistor 237E 1% 1/4W		1.0000	st	
330	10350813	Resistor 261E 1% 1/4W		1.0000	st	
360	10350702	Resistor 309E 1% 1/4W		1.0000	st	
370	10350892	Resistor 340E 1% 1/4W		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
390	10350896	Resistor 442E 1% 1/4W		1.0000	st	
440	10350725	Resistor 470E 5% 1/4W		1.0000	st	
410	10350898	Resistor 499E 1% 1/4W		2.0000	st	
420	10350900	Resistor 562E 1% 1/4W		1.0000	st	
660	10350763	Resistor 680k 5% 1/4W		1.0000	st	
430	10350825	Resistor 768E 1% 1/4W		2.0000	st	
450	10350826	Resistor 866E 1% 1/4W		1.0000	st	
460	10350828	Resistor 976E 1% 1/4W		1.0000	st	
510	10250333	Transistor BC327/25-RR (TAPE)		3.0000	st	
520	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	
550	10300166	Trimmer 20k 15turn (T18)		1.0000	st	
40	10250350	Zenerdiode 18V0/400mW		1.0000	st	
30	10250340	Zenerdiode 2V4 / 400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
80	10400213	Capacitor 10p R2.5 kerk		64.0000	st	
90	10400221	Capacitor 47p R2.5 ker		16.0000	st	
100	10401241	Capacitor 100n/50V R5.0 ker		74.0000	st	
190	10400292	Elco 100uF/ 25V rad R5.0		49.0000	st	
200	10400290	Elco 220uF/ 25V radial R5.0		3.0000	st	
220	10600452	Header 10p 90° R2.54		1.0000	st	
230	10600456	Header 20p 90° R2.54		1.0000	st	
210	10600142	Header 34p 0° R2.54		8.0000	st	
240	10600141	Header 64p 90° R2.54		1.0000	st	
120	10250109	IC 40109 (volt.level shifter)		1.0000	st	
130	10250025	IC 4051B (8 chann multiplexer)		16.0000	st	
140	10250004	IC 4053B (HCF4053 BEY)DIL		22.0000	st	
150	10250094	IC 4094 DIL		12.0000	st	
160	10250320	IC 7815 T0220 Toshiba volt.reg		1.0000	st	
170	10250307	IC NE5532 AP TI (dual-opamp)		8.0000	st	
180	10250305	IC TL074 CN TI (quad-opamp)		8.0000	st	
250	10600394	IC-socket 8 pins		8.0000	st	
260	10600395	IC-socket 14 pins:fork-contact		8.0000	st	
270	10600396	IC-socket 16 pins:fork-contact		51.0000	st	
280	10201361	PCB Octagon-73A (Matrix Audio)		1.0000	st	
10	10350517	Resistor 0E 5% 1/4W		1.0000	st	
20	10350703	Resistor 2E2 5% 1/4W		3.0000	st	
50	10350848	Resistor 10k0 1% 1/4W		128.0000	st	
60	10350853	Resistor 15k8 1% 1/4W		64.0000	st	
70	10350856	Resistor 20k0 1% 1/4W		16.0000	st	
40	10350753	Resistor 100K 5% 1/4W		48.0000	st	
30	10350029	Resistor array 680E sil8 ncom		24.0000	st	
110	10300166	Trimmer 20k 15turn (T18)		32.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
60	10400221	Capacitor 47p R2.5 ker		8.0000	st	
70	10401241	Capacitor 100n/50V R5.0 ker		26.0000	st	
10	10250342	Diode 1N4148 (signal)		1.0000	st	
120	10400290	Elco 220uF/ 25V radial R5.0		2.0000	st	
110	10400243	Elco 220uF/16V rad R5 6x12mm		10.0000	st	
130	10600510	Header 2P Lock 0° 2.54		1.0000	st	
150	10600456	Header 20p 90° R2.54		1.0000	st	
140	10600142	Header 34p 0° R2.54		2.0000	st	
90	10250179	IC DRV-134PA (SSM2142)		8.0000	st	
80	10250307	IC NE5532 AP TI (dual-opamp)		4.0000	st	
160	10600394	IC-socket 8 pins		12.0000	st	
170	10201362	PCB Octagon-74A (Matrix Sumpc)		1.0000	st	
100	10550001	Relay D1C121000 1xchnge minid		1.0000	st	
20	10350517	Resistor 0E 5% 1/4W		2.0000	st	
50	10350879	Resistor 7k87 1% 1/4W		8.0000	st	
30	10350705	Resistor 10E 5% 1/4W		2.0000	st	
40	10350753	Resistor 100K 5% 1/4W		10.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
40	10400243	Elco 220uF/16V rad R5 6x12mm		20.0000	st	
20	10600478	Header 4P 0° R 2.54		20.0000	st	
50	10250179	IC DRV-134PA (SSM2142)		10.0000	st	
60	10600394	IC-socket 8 pins		10.0000	st	
10	10201364	PCB Octagon-58p (declick)		1.0000	st	
30	10351753	Resistor 100k 5% 1/8W		20.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
150	10401251	Capacitor 6n8 R5.0 poly		4.0000	st	
40	10400213	Capacitor 10p R2.5 kerk		16.0000	st	
50	10401257	Capacitor 33n R5.0 poly		4.0000	st	
60	10401257	Capacitor 33n R5.0 poly		4.0000	st	
20	10401241	Capacitor 100n/50V R5.0 ker		20.0000	st	
110	10400291	Elco 100uF/ 16V Rad.Min TAPE!		38.0000	st	
160	10300004	Fader Alps N 60mm Pubm.10kx2		8.0000	st	
170	10600452	Header 10p 90° R2.54		1.0000	st	
180	10600456	Header 20p 90° R2.54		1.0000	st	
190	10250307	IC NE5532 AP TI (dual-opamp)		2.0000	st	
210	10250304	IC TL072 CP TI DIL-8		8.0000	st	
220	10600394	IC-socket 8 pins		10.0000	st	
10	10201401	PCB Pubmate-1a (faders)		1.0000	st	
120	10350765	Resistor 1M0 5% 1/4W		4.0000	st	
130	10350703	Resistor 2E2 5% 1/4W		2.0000	st	
140	10350736	Resistor 3k9 5% 1/4W		16.0000	st	
30	10350741	Resistor 10K 5% 1/4W		36.0000	st	
70	10350749	Resistor 47K 5% 1/4W		20.0000	st	
80	10350753	Resistor 100K 5% 1/4W		4.0000	st	
90	10350724	Resistor 390E 5% 1/4W		4.0000	st	
100	10350761	Resistor 470k 5% 1/4W		8.0000	st	
200	10550210	Switch Alps 2p SPPH43W hor		10.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
160	10401248	Capacitor 2n2 R5.0 poly		1.0000	st	
60	10401253	Capacitor 10n R5.0 poly		1.0000	st	
70	10400213	Capacitor 10p R2.5 kerk		4.0000	st	
30	10401241	Capacitor 100n/50V R5.0 ker		4.0000	st	
110	10400292	Elco 100uF/ 25V rad R5.0		6.0000	st	
40	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
170	10600452	Header 10p 90° R2.54		1.0000	st	
180	10250307	IC NE5532 AP TI (dual-opamp)		1.0000	st	
190	10250304	IC TL072 CP TI DIL-8		1.0000	st	
210	10600394	IC-socket 8 pins		2.0000	st	
10	10201402	PCB Pubmate-2b (mic inputs)		1.0000	st	
120	10300421	RK09 100KBx2cc Short version		3.0000	st	
20	10350517	Resistor 0E 5% 1/4W		3.0000	st	
140	10350729	Resistor 1k0 5% 1/4W		1.0000	st	
150	10350703	Resistor 2E2 5% 1/4W		2.0000	st	
50	10350741	Resistor 10K 5% 1/4W		4.0000	st	
130	10350848	Resistor 10k0 1% 1/4W		2.0000	st	
80	10350744	Resistor 18k 5% 1/4W		2.0000	st	
90	10350749	Resistor 47K 5% 1/4W		1.0000	st	
100	10350828	Resistor 976E 1% 1/4W		2.0000	st	
200	10600238	XLR chas 3p fem X907-02		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
30	10401246	Capacitor 1n0 R5.0 poly		2.0000	st	
330	10401251	Capacitor 6n8 R5.0 poly		2.0000	st	
70	10400213	Capacitor 10p R2.5 kerk		6.0000	st	
130	10400221	Capacitor 47p R2.5 ker		2.0000	st	
20	10401241	Capacitor 100n/50V R5.0 ker		12.0000	st	
160	10401263	Capacitor 180n R5.0 poly		4.0000	st	
260	10401247	Capacitor 1n5 R5.0 poly		2.0000	st	
40	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
180	10401258	Capacitor 47n R5.0 poly		1.0000	st	
270	10250342	Diode 1N4148 (signal)		3.0000	st	
190	10400292	Elco 100uF/ 25V rad R5.0		13.0000	st	
350	10250338	Fet J112 (N-channel switch)		2.0000	st	
360	10250017	Fet J175 (P-channel switch)		2.0000	st	
50	10600511	Header 3P Lock 0° R 2.54		4.0000	st	
370	10600452	Header 10p 90° R2.54		2.0000	st	
380	10250307	IC NE5532 AP TI (dual-opamp)		3.0000	st	
390	10250304	IC TL072 CP TI DIL-8		3.0000	st	
400	10600394	IC-socket 8 pins		6.0000	st	
10	10201403	PCB Pubmate-3a (master)		1.0000	st	
200	10300421	RK09 100KBx2cc Short version		3.0000	st	
220	10300423	RK09 10KAx2 Short version		1.0000	st	
250	10350765	Resistor 1M0 5% 1/4W		1.0000	st	
290	10350732	Resistor 1k8 5% 1/4W		2.0000	st	
280	10350703	Resistor 2E2 5% 1/4W		2.0000	st	
300	10350734	Resistor 2k7 5% 1/4W		2.0000	st	
310	10350736	Resistor 3k9 5% 1/4W		6.0000	st	
320	10350739	Resistor 6k8 5% 1/4W		2.0000	st	
60	10350741	Resistor 10K 5% 1/4W		11.0000	st	
230	10350776	Resistor 10M0 5% 1/4W		4.0000	st	
210	10350848	Resistor 10k0 1% 1/4W		1.0000	st	
80	10350743	Resistor 15k 5% 1/4W		2.0000	st	
240	10350853	Resistor 15k8 1% 1/4W		4.0000	st	
90	10350744	Resistor 18k 5% 1/4W		4.0000	st	
100	10350745	Resistor 22k 5% 1/4W		1.0000	st	
110	10350747	Resistor 33k 5% 1/4W		1.0000	st	
120	10350713	Resistor 47E 5% 1/4W		4.0000	st	
140	10350717	Resistor 100E 5% 1/4W		5.0000	st	
150	10350753	Resistor 100K 5% 1/4W		4.0000	st	
170	10350757	Resistor 220k 5% 1/4W		2.0000	st	
340	10250332	Transistor BC337/25-RR Tape!!!		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
300	10700710	Bout M3x12 bolkop pozidrive		6.0000	st	
50	10400213	Capacitor 10p R2.5 kerk		2.0000	st	
20	10401241	Capacitor 100n/50V R5.0 ker		6.0000	st	
30	10600180	Conn 2p Mains Terminal 5mm		1.0000	st	
280	10700002	Druknagel wit (nylon)		2.0000	st	
110	10400292	Elco 100uF/ 25V rad R5.0		10.0000	st	
140	10400299	Elco 4700uF/ 40V axial		2.0000	st	
40	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
210	10600506	Header 10P box 0° 2.54		1.0000	st	
200	10720663	Heatsink KL-207/38.1/SW 207180		2.0000	st	
90	10250320	IC 7815 T0220 Toshiba volt.reg		1.0000	st	
100	10250321	IC 7915 T0220 ONS (volt.reg)		1.0000	st	
220	10250307	IC NE5532 AP TI (dual-opamp)		1.0000	st	
290	10600394	IC-socket 8 pins		1.0000	st	
190	10600530	Jack Break slimline S253-84		1.0000	st	
250	10700625	Kartelring M3 (buitenvertand)		4.0000	st	
260	10700610	Moer M3		4.0000	st	
310	10700610	Moer M3		6.0000	st	
10	10201404	PCB Pubmate-4a (power)		1.0000	st	
120	10300423	RK09 10KAx2 Short version		1.0000	st	
160	10250346	Rect. B80C1500 (rectang)		1.0000	st	
130	10350703	Resistor 2E2 5% 1/4W		2.0000	st	
150	10350737	Resistor 4k7 5% 1/4W		2.0000	st	
60	10350749	Resistor 47K 5% 1/4W		4.0000	st	
70	10350717	Resistor 100E 5% 1/4W		2.0000	st	
80	10350723	Resistor 330E 5% 1/4W		2.0000	st	
240	10700293	Taptite M2.5x6 bolk/pozidrive		4.0000	st	
270	10700616	Taptite M3x10 bolkoppozidr/zw.		4.0000	st	
230	10950601	Transf.PCB 20VA 2x15/2x115+Shl		1.0000	st	
170	10250333	Transistor BC327/25-RR (TAPE)		2.0000	st	
180	10250332	Transistor BC337/25-RR Tape!!!		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
50	10600535	Conn Cinch 4xPCB gold pl bush		6.0000	st	
30	10600511	Header 3P Lock 0° R 2.54		2.0000	st	
60	10600452	Header 10p 90° R2.54		1.0000	st	
70	10600456	Header 20p 90° R2.54		1.0000	st	
10	10201405	PCB Pubmate-5a (connectors)		1.0000	st	
20	10350517	Resistor 0E 5% 1/4W		1.0000	st	
40	10350713	Resistor 47E 5% 1/4W		4.0000	st	
90	10600238	XLR chas 3p fem X907-02		2.0000	st	
80	10600798	XLR chass male pl X906-02		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
370	10401246	Capacitor 1n0 R5.0 poly		6.0000	st	
380	10401250	Capacitor 4n7 R5.0 poly		1.0000	st	
320	10400209	Capacitor 4p7 R2.5 ker		2.0000	st	
390	10401251	Capacitor 6n8 R5.0 poly		2.0000	st	
330	10400211	Capacitor 6p8 R2.5 ker		2.0000	st	
340	10400213	Capacitor 10p R2.5 kerk		6.0000	st	
360	10401241	Capacitor 100n/50V R5.0 ker		22.0000	st	
350	10400225	Capacitor 100pf R2.5 ker		2.0000	st	
420	10401263	Capacitor 180n R5.0 poly		4.0000	st	
410	10401261	Capacitor 100n R5.0 poly		1.0000	st	
400	10401258	Capacitor 47n R5.0 poly		1.0000	st	
10	10250342	Diode 1N4148 (signal)		1.0000	st	
530	10400292	Elco 100uF/ 25V rad R5.0		3.0000	st	
540	10400302	Elco 100uF/ 63V radial R5.0		1.0000	st	
560	10400293	Elco 220uF/ 63V radial R5.0		2.0000	st	
550	10400243	Elco 220uF/16V rad R5 6x12mm		18.0000	st	
570	10400303	Elco 1000uF/ 10V radial R5.0		1.0000	st	
520	10400284	Elco 10uF/50V radial R5.0		1.0000	st	
510	10400279	Elco 1uF/100V radial R5.0		2.0000	st	
580	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
590	10600478	Header 4P 0° R 2.54		2.0000	st	
600	10600170	Header 4P 0° female pcb		1.0000	st	
595	10600479	Header 5P 0° R 2.54		2.0000	st	
610	10600456	Header 20p 90° R2.54		2.0000	st	
620	10600140	Header 34p 90° R2.54		1.0000	st	
440	10250004	IC 4053B (HCF4053 BEY)DIL		1.0000	st	
740	10250076	IC LM311P comparator		1.0000	st	
460	10250184	IC SSM2019BN or INA217AIP		1.0000	st	
450	10250032	IC THAT 2180 BL08-U (VCA)		2.0000	st	
470	10250304	IC TL072 CP TI DIL-8		1.0000	st	
480	10250305	IC TL074 CN TI (quad-opamp)		2.0000	st	
710	10600394	IC-socket 8 pins		3.0000	st	
700	10600402	IC-socket 8 pins:SIL 2.54mm		2.0000	st	
720	10600395	IC-socket 14 pins:fork-contact		2.0000	st	
730	10600396	IC-socket 16 pins:fork-contact		1.0000	st	
690	10201411	PCB Airlab-1D (channel)		1.0000	st	
660	10300421	RK09 100KBx2cc Short version		3.0000	st	
670	10300423	RK09 10KAx2 Short version		1.0000	st	
300	10350765	Resistor 1M0 5% 1/4W		1.0000	st	
90	10350731	Resistor 1k5 5% 1/4W		2.0000	st	
100	10350732	Resistor 1k8 5% 1/4W		2.0000	st	
30	10350703	Resistor 2E2 5% 1/4W		7.0000	st	
110	10350733	Resistor 2k2 5% 1/4W		2.0000	st	
120	10350734	Resistor 2k7 5% 1/4W		2.0000	st	
140	10350737	Resistor 4k7 5% 1/4W		3.0000	st	
250	10350844	Resistor 4k75 1% 1/4W		2.0000	st	
150	10350739	Resistor 6k8 5% 1/4W		4.0000	st	
270	10350846	Resistor 6k81 1% 1/4W		2.0000	st	
160	10350741	Resistor 10K 5% 1/4W		14.0000	st	
230	10350776	Resistor 10M0 5% 1/4W		2.0000	st	
280	10350848	Resistor 10k0 1% 1/4W		13.0000	st	
170	10350743	Resistor 15k 5% 1/4W		4.0000	st	
200	10350853	Resistor 15k8 1% 1/4W		4.0000	st	
180	10350744	Resistor 18k 5% 1/4W		4.0000	st	
310	10350856	Resistor 20k0 1% 1/4W		5.0000	st	
240	10350859	Resistor 24k3 1% 1/4W		1.0000	st	
190	10350746	Resistor 27k 5% 1/4W		3.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
260	10350861	Resistor 28k7 1% 1/4W		1.0000	st	
290	10350866	Resistor 47k5 1% 1/4W		1.0000	st	
40	10350714	Resistor 56E 5% 1/4W		1.0000	st	
50	10350717	Resistor 100E 5% 1/4W		2.0000	st	
210	10350753	Resistor 100K 5% 1/4W		13.0000	st	
60	10350719	Resistor 150E 5% 1/4W		1.0000	st	
220	10350757	Resistor 220k 5% 1/4W		2.0000	st	
80	10350722	Resistor 270E 5% 1/4W		1.0000	st	
70	10350725	Resistor 470E 5% 1/4W		1.0000	st	
130	10350826	Resistor 866E 1% 1/4W		1.0000	st	
750	10600414	Shunt 2p (mini jumper)		9.0000	st	
640	10550395	Switch Alps 2p-ns MOMENT		2.0000	st	
630	10550414	Switch Alps 2pole mini NS		1.0000	st	
650	10550415	Switch Alps 4pole mini NS		4.0000	st	
490	10250333	Transistor BC327/25-RR (TAPE)		1.0000	st	
430	10300163	Trimmer 1k 10turn (T18)		1.0000	st	
20	10250351	Zenerdiode 5V6/400mW		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
460	10401246	Capacitor 1n0 R5.0 poly		1.0000	st	
470	10401248	Capacitor 2n2 R5.0 poly		3.0000	st	
480	10401250	Capacitor 4n7 R5.0 poly		4.0000	st	
490	10401251	Capacitor 6n8 R5.0 poly		1.0000	st	
400	10400211	Capacitor 6p8 R2.5 ker		1.0000	st	
500	10400278	Capacitor 8n2 R5.0 poly		1.0000	st	
410	10400213	Capacitor 10p R2.5 kerk		5.0000	st	
510	10400273	Capacitor 12n R5.0 poly		1.0000	st	
420	10400217	Capacitor 22p R2.5 3mm		1.0000	st	
520	10401257	Capacitor 33n R5.0 poly		4.0000	st	
450	10401241	Capacitor 100n/50V R5.0 ker		24.0000	st	
430	10400234	Capacitor 680p R2.5 ker		1.0000	st	
440	10400235	Capacitor 820p R2.5 ker		1.0000	st	
540	10401261	Capacitor 100n R5.0 poly		1.0000	st	
550	10401268	Capacitor 1uF R5.0 poly		1.0000	st	
530	10401258	Capacitor 47n R5.0 poly		1.0000	st	
10	10250342	Diode 1N4148 (signal)		1.0000	st	
710	10400292	Elco 100uF/ 25V rad R5.0		7.0000	st	
730	10400290	Elco 220uF/ 25V radial R5.0		2.0000	st	
720	10400243	Elco 220uF/16V rad R5 6x12mm		7.0000	st	
700	10400284	Elco 10uF/50V radial R5.0		2.0000	st	
740	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
750	10600478	Header 4P 0° R 2.54		6.0000	st	
760	10600456	Header 20p 90° R2.54		2.0000	st	
770	10600140	Header 34p 90° R2.54		1.0000	st	
580	10250004	IC 4053B (HCF4053 BEY)DIL		1.0000	st	
590	10250014	IC 4N27 (opto-coupler)		1.0000	st	
910	10250076	IC LM311P comparator		1.0000	st	
620	10250055	IC LS1240 (ringer)DIL		1.0000	st	
610	10250307	IC NE5532 AP TI (dual-opamp)		1.0000	st	
600	10250032	IC THAT 2180 BL08-U (VCA)		1.0000	st	
630	10250304	IC TL072 CP TI DIL-8		1.0000	st	
640	10250305	IC TL074 CN TI (quad-opamp)		2.0000	st	
870	10600394	IC-socket 8 pins		3.0000	st	
860	10600402	IC-socket 8 pins:SIL 2.54mm		1.0000	st	
880	10600395	IC-socket 14 pins:fork-contact		2.0000	st	
890	10600396	IC-socket 16 pins:fork-contact		1.0000	st	
850	10201412	PCB Airlab-2a (telco)		1.0000	st	
820	10300421	RK09 100KBx2cc Short version		1.0000	st	
830	10300423	RK09 10KAx2 Short version		1.0000	st	
840	10300420	RK09 10KBx2cc Short version		1.0000	st	
810	10300422	RK09 20KA Short version		1.0000	st	
690	10550001	Relay D1C121000 1xchnge minid		1.0000	st	
680	10550010	Relay MT212VC93402 12V (2x om)		1.0000	st	
290	10350765	Resistor 1M0 5% 1/4W		2.0000	st	
90	10350729	Resistor 1k0 5% 1/4W		1.0000	st	
100	10350732	Resistor 1k8 5% 1/4W		2.0000	st	
40	10350703	Resistor 2E2 5% 1/4W		6.0000	st	
320	10350835	Resistor 2k00 1% 1/4W		1.0000	st	
110	10350733	Resistor 2k2 5% 1/4W		2.0000	st	
120	10350734	Resistor 2k7 5% 1/4W		2.0000	st	
130	10350735	Resistor 3k3 5% 1/4W		1.0000	st	
330	10350784	Resistor 3k48 1% 1/4W		1.0000	st	
140	10350736	Resistor 3k9 5% 1/4W		2.0000	st	
150	10350737	Resistor 4k7 5% 1/4W		2.0000	st	
170	10350843	Resistor 5k11 1% 1/4W		4.0000	st	
160	10350738	Resistor 5k6 5% 1/4W		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
180	10350739	Resistor 6k8 5% 1/4W		1.0000	st	
190	10350740	Resistor 8k2 5% 1/4W		1.0000	st	
340	10350520	Resistor 8k25 1% 1/4W		1.0000	st	
200	10350741	Resistor 10K 5% 1/4W		8.0000	st	
350	10350848	Resistor 10k0 1% 1/4W		11.0000	st	
210	10350742	Resistor 12k 5% 1/4W		1.0000	st	
220	10350744	Resistor 18k 5% 1/4W		1.0000	st	
370	10350856	Resistor 20k0 1% 1/4W		7.0000	st	
360	10350859	Resistor 24k3 1% 1/4W		1.0000	st	
230	10350746	Resistor 27k 5% 1/4W		1.0000	st	
380	10350861	Resistor 28k7 1% 1/4W		3.0000	st	
240	10350747	Resistor 33k 5% 1/4W		2.0000	st	
50	10350713	Resistor 47E 5% 1/4W		2.0000	st	
250	10350749	Resistor 47K 5% 1/4W		1.0000	st	
390	10350866	Resistor 47k5 1% 1/4W		1.0000	st	
60	10350714	Resistor 56E 5% 1/4W		1.0000	st	
260	10350751	Resistor 68k 5% 1/4W		1.0000	st	
70	10350717	Resistor 100E 5% 1/4W		4.0000	st	
280	10350753	Resistor 100K 5% 1/4W		2.0000	st	
270	10350718	Resistor 120E 5% 1/4W		1.0000	st	
80	10350719	Resistor 150E 5% 1/4W		1.0000	st	
300	10350792	Resistor 604E 1% 1/4W		1.0000	st	
310	10350826	Resistor 866E 1% 1/4W		1.0000	st	
900	10350002	Resistor vdr S10V-S05K250		1.0000	st	
920	10600414	Shunt 2p (mini jumper)		3.0000	st	
790	10550395	Switch Alps 2p-ns MOMENT		2.0000	st	
780	10550414	Switch Alps 2pole mini NS		3.0000	st	
800	10550415	Switch Alps 4pole mini NS		2.0000	st	
670	10950018	Trafo LM-NP-1003-B (PTT line)		2.0000	st	
650	10250333	Transistor BC327/25-RR (TAPE)		1.0000	st	
660	10250332	Transistor BC337/25-RR Tape!!!		2.0000	st	
560	10300160	Trimmer 2k 10turn (T18)		1.0000	st	
570	10300202	Trimmer 2k top 25turn (T93YB)		1.0000	st	
20	10250351	Zenerdiode 5V6/400mW		2.0000	st	
30	10250352	Zenerdiode 8V2/400mW		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
160	10400213	Capacitor 10p R2.5 kerk		4.0000	st	
170	10400217	Capacitor 22p R2.5 3mm		8.0000	st	
180	10400223	Capacitor 68p R2.5 ker		2.0000	st	
190	10401241	Capacitor 100n/50V R5.0 ker		25.0000	st	
200	10401268	Capacitor 1uF R5.0 poly		2.0000	st	
300	10400292	Elco 100uF/ 25V rad R5.0		25.0000	st	
310	10400243	Elco 220uF/16V rad R5 6x12mm		10.0000	st	
280	10250338	Fet J112 (N-channel switch)		2.0000	st	
290	10250017	Fet J175 (P-channel switch)		2.0000	st	
320	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
330	10600456	Header 20p 90° R2.54		3.0000	st	
340	10600140	Header 34p 90° R2.54		1.0000	st	
210	10250001	IC 7905 T0220 SGS (volt.reg)		1.0000	st	
240	10250179	IC DRV-134PA (SSM2142)		2.0000	st	
220	10250028	IC LM317 (var.pos.volt.reg.)		1.0000	st	
230	10250307	IC NE5532 AP TI (dual-opamp)		2.0000	st	
250	10250304	IC TL072 CP TI DIL-8		4.0000	st	
260	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
400	10600394	IC-socket 8 pins		8.0000	st	
410	10600395	IC-socket 14 pins:fork-contact		1.0000	st	
390	10201413	PCB Airlab-3b (ctr/aux/tape)		1.0000	st	
370	10300423	RK09 10KAx2 Short version		3.0000	st	
380	10300420	RK09 10KBx2cc Short version		1.0000	st	
60	10350730	Resistor 1k2 5% 1/4W		2.0000	st	
20	10350703	Resistor 2E2 5% 1/4W		6.0000	st	
80	10350736	Resistor 3k9 5% 1/4W		2.0000	st	
90	10350737	Resistor 4k7 5% 1/4W		2.0000	st	
100	10350741	Resistor 10K 5% 1/4W		17.0000	st	
130	10350776	Resistor 10M0 5% 1/4W		4.0000	st	
140	10350848	Resistor 10k0 1% 1/4W		9.0000	st	
150	10350856	Resistor 20k0 1% 1/4W		4.0000	st	
30	10350713	Resistor 47E 5% 1/4W		10.0000	st	
110	10350749	Resistor 47K 5% 1/4W		2.0000	st	
40	10350717	Resistor 100E 5% 1/4W		2.0000	st	
120	10350753	Resistor 100K 5% 1/4W		19.0000	st	
50	10350721	Resistor 220E 5% 1/4W		1.0000	st	
350	10550414	Switch Alps 2pole mini NS		1.0000	st	
360	10550415	Switch Alps 4pole mini NS		6.0000	st	
270	10250332	Transistor BC337/25-RR Tape!!!		2.0000	st	
70	10300202	Trimmer 2k top 25turn (T93YB)		1.0000	st	
10	10250350	Zenerdiode 18V0/400mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
150	10400213	Capacitor 10p R2.5 kerk		11.0000	st	
160	10400217	Capacitor 22p R2.5 3mm		3.0000	st	
170	10401241	Capacitor 100n/50V R5.0 ker		22.0000	st	
180	10401268	Capacitor 1uF R5.0 poly		4.0000	st	
260	10400292	Elco 100uF/ 25V rad R5.0		26.0000	st	
270	10400243	Elco 220uF/16V rad R5 6x12mm		6.0000	st	
240	10250338	Fet J112 (N-channel switch)		6.0000	st	
250	10250017	Fet J175 (P-channel switch)		1.0000	st	
280	10600452	Header 10p 90° R2.54		1.0000	st	
290	10600456	Header 20p 90° R2.54		2.0000	st	
300	10600140	Header 34p 90° R2.54		1.0000	st	
200	10250179	IC DRV-134PA (SSM2142)		2.0000	st	
190	10250307	IC NE5532 AP TI (dual-opamp)		3.0000	st	
210	10250304	IC TL072 CP TI DIL-8		3.0000	st	
220	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
350	10600394	IC-socket 8 pins		8.0000	st	
360	10600395	IC-socket 14 pins:fork-contact		1.0000	st	
340	10201414	PCB Airlab-4c (studio/tb)		1.0000	st	
330	10300423	RK09 10Kx2 Short version		4.0000	st	
50	10350732	Resistor 1k8 5% 1/4W		2.0000	st	
20	10350703	Resistor 2E2 5% 1/4W		4.0000	st	
60	10350736	Resistor 3k9 5% 1/4W		2.0000	st	
70	10350737	Resistor 4k7 5% 1/4W		4.0000	st	
80	10350741	Resistor 10K 5% 1/4W		17.0000	st	
120	10350776	Resistor 10M0 5% 1/4W		7.0000	st	
130	10350848	Resistor 10k0 1% 1/4W		3.0000	st	
140	10350856	Resistor 20k0 1% 1/4W		2.0000	st	
110	10350745	Resistor 22k 5% 1/4W		4.0000	st	
30	10350713	Resistor 47E 5% 1/4W		2.0000	st	
90	10350749	Resistor 47K 5% 1/4W		18.0000	st	
40	10350717	Resistor 100E 5% 1/4W		5.0000	st	
100	10350753	Resistor 100K 5% 1/4W		29.0000	st	
310	10550205	Switch Alps 2p mini MOMENT		4.0000	st	
320	10550415	Switch Alps 4pole mini NS		3.0000	st	
230	10250332	Transistor BC337/25-RR Tape!!!		2.0000	st	
10	10250350	Zenerdiode 18V0/400mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
40	10401241	Capacitor 100n/50V R5.0 ker		1.0000	st	
100	10600516	Conn 16p (single row 16p)		1.0000	st	
70	10400292	Elco 100uF/ 25V rad R5.0		1.0000	st	
80	10600510	Header 2P Lock 0° 2.54		1.0000	st	
90	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
60	10600515	Header 4P Lock 90° 2.54		1.0000	st	
110	10600456	Header 20p 90° R2.54		1.0000	st	
120	10201415	PCB Airlab-5a (lcd/keyb)		1.0000	st	
10	10350705	Resistor 10E 5% 1/4W		1.0000	st	
20	10350709	Resistor 22E 5% 1/4W		1.0000	st	
130	10550457	Switch Airl 97320037F+97.910.9		7.0000	st	
50	10300151	Trimmer 10K 1turn PT10LC		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
410	10700688	Bout M2.5x5 blank BCK kombi Ph		2.0000	st	
120	10400217	Capacitor 22p R2.5 3mm		2.0000	st	
130	10401241	Capacitor 100n/50V R5.0 ker		41.0000	st	
260	10250398	Crystal 11.0592 Mhz		1.0000	st	
280	10400292	Elco 100uF/ 25V rad R5.0		4.0000	st	
270	10400284	Elco 10uF/50V radial R5.0		1.0000	st	
290	10600478	Header 4P 0° R 2.54		1.0000	st	
300	10600486	Header 6p 0° R3.96		1.0000	st	
310	10600509	Header 20P 0° 2.54		17.0000	st	
320	10600140	Header 34p 90° R2.54		1.0000	st	
330	10720663	Heatsink KL-207/38.1/SW 207180		1.0000	st	
140	10250057	IC 4052 DIL-16		16.0000	st	
150	10250094	IC 4094 DIL		13.0000	st	
200	10250048	IC 74HC138 (3to8 line decoder)		1.0000	st	
190	10250035	IC 74HC14 DIL-14		1.0000	st	
210	10250033	IC 74HC573 dil versie		2.0000	st	
160	10250291	IC 7805 T0220 volt.reg)		1.0000	st	
220	10250036	IC 80C552 (8-bit micro-comptr)		1.0000	st	
180	10250039	IC BS62LV256PC-70 ram 28pins		1.0000	st	
170	10250027	IC MX27C512-70 XF1		1.0000	st	
230	10250187	IC X24164P 2kx8ser.EEprom dil8		1.0000	st	
350	10600394	IC-socket 8 pins		1.0000	st	
360	10600395	IC-socket 14 pins:fork-contact		1.0000	st	
370	10600396	IC-socket 16 pins:fork-contact		30.0000	st	
380	10600398	IC-socket 20 pins:fork-contact		2.0000	st	
390	10600401	IC-socket 28 pins:fork-contact		2.0000	st	
400	10600403	IC-socket 68 pins:PLCC Socket		1.0000	st	
340	10201416	PCB Airlab-6B (cpu/mux)		1.0000	st	
10	10350517	Resistor 0E 5% 1/4W		1.0000	st	
20	10350703	Resistor 2E2 5% 1/4W		2.0000	st	
80	10350735	Resistor 3k3 5% 1/4W		2.0000	st	
30	10350705	Resistor 10E 5% 1/4W		1.0000	st	
90	10350741	Resistor 10K 5% 1/4W		3.0000	st	
40	10350713	Resistor 47E 5% 1/4W		6.0000	st	
110	10350753	Resistor 100K 5% 1/4W		1.0000	st	
50	10350725	Resistor 470E 5% 1/4W		2.0000	st	
60	10350726	Resistor 560E 5% 1/4W		2.0000	st	
70	10350029	Resistor array 680E sil8 ncom		29.0000	st	
100	10350031	Resistor array 8x 10k 9p SIL		17.0000	st	
240	10250333	Transistor BC327/25-RR (TAPE)		1.0000	st	
250	10250332	Transistor BC337/25-RR Tape!!!		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
10	10250342	Diode 1N4148 (signal)		8.0000	st	
30	10600540	Header 10p 0° 2.54		1.0000	st	
40	10201417	PCB Airlab-8p (VU)		1.0000	st	
20	10350517	Resistor 0E 5% 1/4W		1.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
30	10600536	Conn Cinch 2xPCB(gold pl bush)		1.0000	st	
10	10250342	Diode 1N4148 (signal)		1.0000	st	
50	10600456	Header 20p 90° R2.54		1.0000	st	
40	10600530	Jack Break slimline S253-84		1.0000	st	
70	10201418	PCB Airlab-10B (chan i/o)		1.0000	st	
20	10550001	Relay D1C121000 1xchnge minid		1.0000	st	
80	10600534	Stacking Jack NSJ12HC		1.0000	st	
60	10600238	XLR chas 3p fem X907-02		3.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
10	10600536	Conn Cinch 2xPCB(gold pl bush)		1.0000	st	
20	10600535	Conn Cinch 4xPCB gold pl bush		2.0000	st	
30	10600456	Header 20p 90° R2.54		1.0000	st	
50	10201419	PCB Airlab-30a (master i/o1)		1.0000	st	
40	10600798	XLR chass male pl X906-02		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
10	10600536	Conn Cinch 2xPCB(gold pl bush)		1.0000	st	
20	10600535	Conn Cinch 4xPCB gold pl bush		1.0000	st	
40	10600456	Header 20p 90° R2.54		1.0000	st	
30	10600530	Jack Break slimline S253-84		2.0000	st	
60	10201420	PCB Airlab-40a (master i/o2)		1.0000	st	
50	10600798	XLR chass male pl X906-02		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
20	10600390	ChipCard Conn 523 CCM02-2-N035		1.0000	st	
40	10600452	Header 10p 90° R2.54		1.0000	st	
10	10201421	PCB Airlab-50B (chipcard)		1.0000	st	
30	10350517	Resistor 0E 5% 1/4W		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
200	10400213	Capacitor 10p R2.5 kerk		4.0000	st	
50	10401241	Capacitor 100n/50V R5.0 ker		4.0000	st	
150	10600043	Conn sub-D9 Fem Pcb 7906-09FHA		2.0000	st	
10	10250342	Diode 1N4148 (signal)		2.0000	st	
90	10400292	Elco 100uF/ 25V rad R5.0		1.0000	st	
100	10400243	Elco 220uF/16V rad R5 6x12mm		1.0000	st	
80	10400279	Elco 1uF/100V radial R5.0		4.0000	st	
120	10600452	Header 10p 90° R2.54		2.0000	st	
130	10600456	Header 20p 90° R2.54		1.0000	st	
140	10600140	Header 34p 90° R2.54		1.0000	st	
60	10250072	IC MAX-232N DIL16(RS232 driver)		1.0000	st	
210	10250305	IC TL074 CN TI (quad-opamp)		1.0000	st	
170	10600395	IC-socket 14 pins:fork-contact		2.0000	st	
110	10600530	Jack Break slimline S253-84		2.0000	st	
160	10201422	PCB Airlab-60B (cpu i/o)		1.0000	st	
70	10550001	Relay D1C121000 1xchnge minid		2.0000	st	
40	10350731	Resistor 1k5 5% 1/4W		4.0000	st	
20	10350703	Resistor 2E2 5% 1/4W		1.0000	st	
30	10350705	Resistor 10E 5% 1/4W		1.0000	st	
180	10350851	Resistor 12k0 1% 1/4W		4.0000	st	
190	10350861	Resistor 28k7 1% 1/4W		4.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
100	10401253	Capacitor 10n R5.0 poly		1.0000	st	
90	10400223	Capacitor 68p R2.5 ker		1.0000	st	
110	10401241	Capacitor 100n/50V R5.0 ker		2.0000	st	
130	10400281	Elco 4u7/ 50V radial R5.0		1.0000	st	
140	10400292	Elco 100uF/ 25V rad R5.0		2.0000	st	
150	10600511	Header 3P Lock 0° R 2.54		1.0000	st	
160	10600512	Header 4P Lock 0° 2.54		1.0000	st	
120	10250306	IC NE5534 AP TI (single-opamp)		1.0000	st	
180	10600394	IC-socket 8 pins		1.0000	st	
10	10201423	PCB Airlab 9P (tb)		1.0000	st	
170	10300420	RK09 10KBx2cc Short version		1.0000	st	
40	10350729	Resistor 1k0 5% 1/4W		1.0000	st	
50	10350736	Resistor 3k9 5% 1/4W		1.0000	st	
60	10350741	Resistor 10K 5% 1/4W		1.0000	st	
30	10350709	Resistor 22E 5% 1/4W		1.0000	st	
70	10350749	Resistor 47K 5% 1/4W		1.0000	st	
80	10350757	Resistor 220k 5% 1/4W		1.0000	st	
20	10250362	Zenerdiode 4V7/400mW		2.0000	st	

Positie	Artikel code	Omschrijving	Leveranciercode	Netto hoeveelheid	Vrd eh.	Verval datum
30	10300450	Fader ALPS-1n10k RS45N1211cros		1.0000	st	
20	10600512	Header 4P Lock 0° 2.54		4.0000	st	
10	10201424	PCB Crosfader/p		1.0000	st	