




# TELEPHONE HYBRID-1


How to connect the Telephone Hybrid 1 to your D&R Airence, Airlite, Airmate mixer.

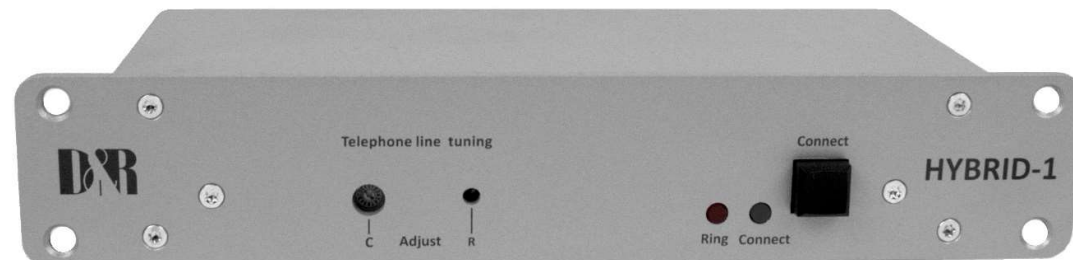

At some mixers you'll need to create an N-1 or Mixminus output to prevent the caller from hearing itself in an echo trough the telephone line.

The Hybrid-1 already creates an N-1 or Mixminus for the Audio that is send to the mixer.

We'll explain how to do this if needed for that mixer.

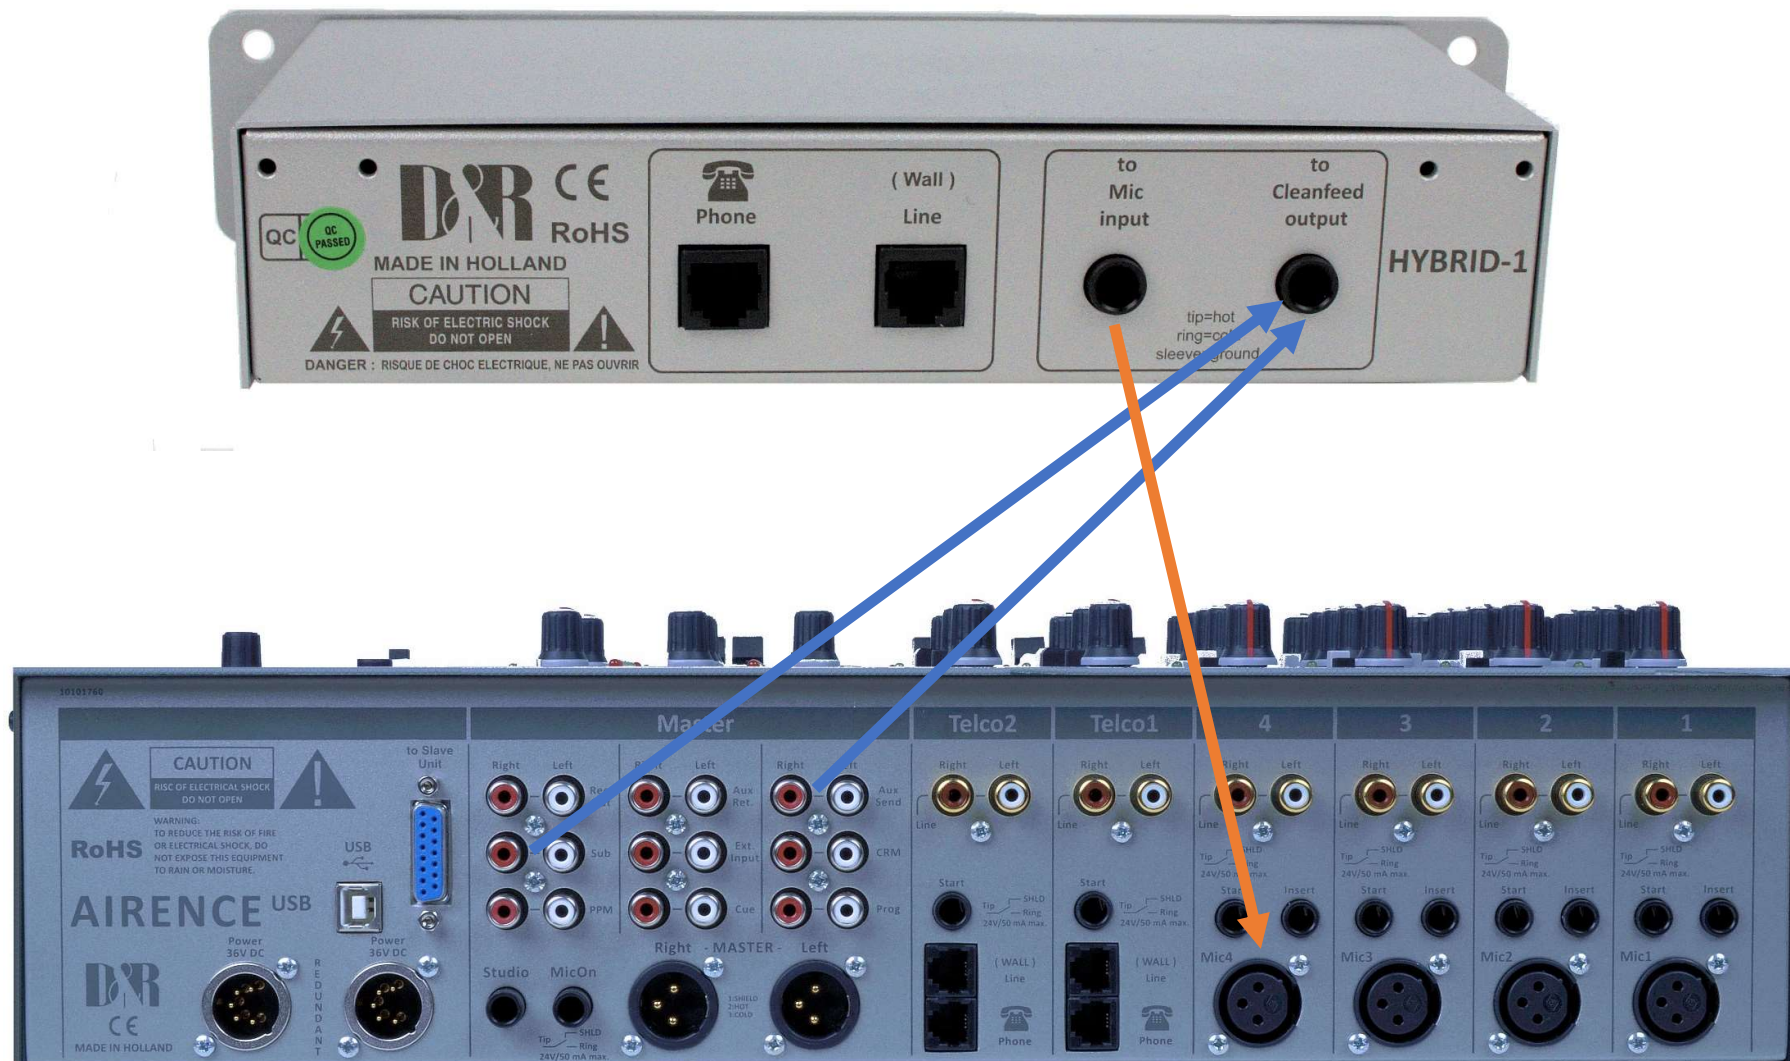


For the Airence connect the Sub or Aux send of the Airence Main to the “to Cleanfeed” output of the Hybrid-1. Connect the to Mic input of the Hybrid to a Mic input at a desired Channel of the Airence Main or Airence Extender. Set the Sub or Aux send of all the other channels to “On” and the channel where you connected the Hybrid-1 at to “Off”.



For an Airlite connect the Cleanfeed output of the Airlite to the to cleanfeed output at the Hybrid-1  
 Connect the to Mic input of the Hybrid-1 to a microphone pre-amp and the output of the pre-amp to the input of Channel 8.



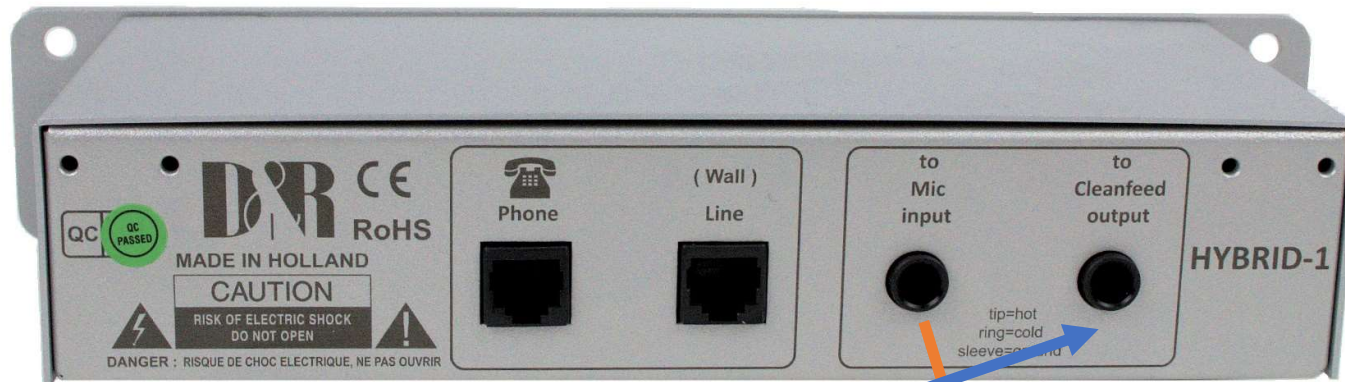

For an Airmate connect the Cleanfeed output of the Airmate to the to Cleanfeed output of the Hybrid-1.

Connect the to Mic input of the Hybrid to a Mic input at a desired Channel.

Set the jumpers (Cleanfeed on/off) J7 triple channel and Telco) of all the other channels to "On" and the channel where the Hybrid-1 is connect to to "Off".

<https://www.d-r.nl/assets/airmate-usb-manual-2.13-mail-smd.pdf>